



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

BUNNY LINE 600 (INGROUND LUMINAIRES)





**BULLARD
BOLLARDS**
Think Bullard Think Bullard



CODE:

BB-001539.BUFTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

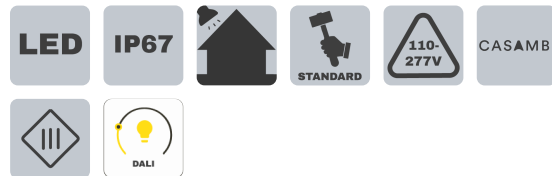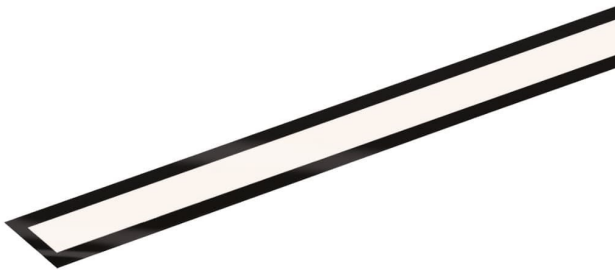

GENERAL INFORMATION:

The Bunny Line 600 is a compact linear inground LED luminaire designed for refined architectural and façade lighting applications. Manufactured from extruded aluminum EN AW-6060 T5 with die-cast aluminum components and protected by an 8 mm tempered glass diffuser, it offers excellent durability and corrosion resistance, reinforced by an IP67 rating for dependable outdoor performance. Featuring medium flood and asymmetric beam distributions, it provides controlled, uniform illumination ideal for wall washing and highlighting structural details. Operating on 24V DC with a remote driver configuration and offering dimming options including Non-dimmable, 0-10V, Casambi, and DALI, the Bunny Line 600 combines high visual comfort, minimalist design, and reliable long-term performance, backed by a 5-year warranty.

LIGHTING:

LED

LED

VOLTAGE:

110-277V



GASKETS:

Silicone gaskets

FIXTURE TYPE:

Inground Luminaires

MATERIAL:

Extruded aluminum EN AW-6060 T5 high resistance to oxidation,
Die-cast aluminum EN AB 44100 highly resistant to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 8mm

IP RATING:

IP 67

IP67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

CODE:
BB-001539.BUFTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

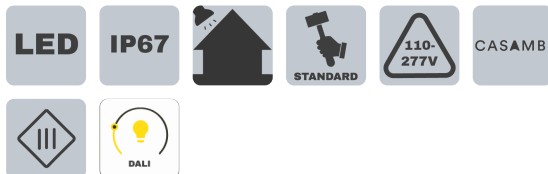

APPLINCE CLASS:

|||

OPERATION RANGE:

24 V DC

DRIVER POSITION:

Remote

CRI:

>90

CABLE ENTRY / CABLE TYPE:

Brass cable gland M12 Ø 3.5/7 mm / FR5FOEM7-AD8 2x0.5mm2

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

28° - Symmetrical medium flood (15 ° - 45 °)

39° x 19° - 2 Axis symmetrical

69° x 139° - 2 Axis symmetrical

BEAM DIRECTIONABILITY:

Fixed optics

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes

Functional design / Minimal design

Shock resistant / Operating Temperature: -22°F~122°F

FINISH OPTIONS:

Glass

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA





**BULLARD
BOLLARDS**
Think Bollard Think Bullard

CODE:
BB-001539.BUFTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

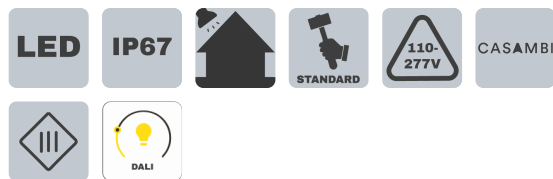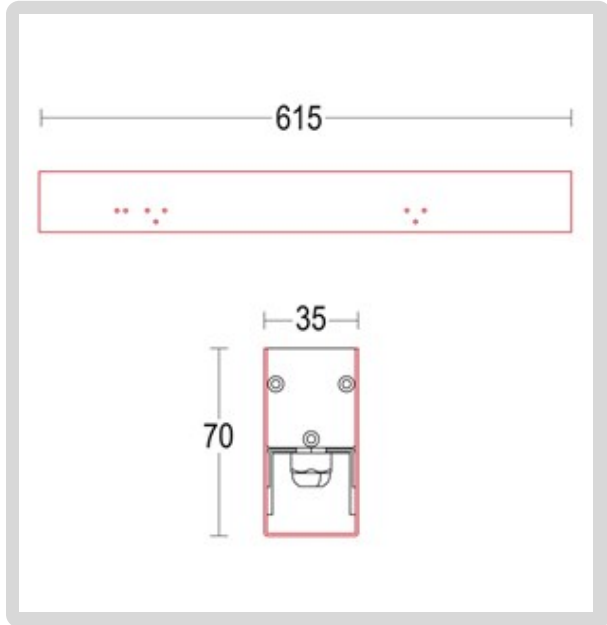

HOW TO ORDER:

CODE:

Example:
CODE: BB-001539.BUFTTUNEL-GH-
B69-139-1-DIM-AC205-IP66

BB-001539.BUFTTU
NEL-GH-B69-
139-1-DIM-AC205-
IP66

1 MODELS:

- A) Recessed depth - Ø: 2.76" (7 cm)
B) Length - L: 24.21" (61.5 cm)
C) Width - W: 1.38" (3.5 cm)

2 LIGHT SOURCE:

CODE BEAM ANGLE | WATTAGE | KELVINS | LUMENS

-B69-139-1	69°x139	1 x 7.98 W / 3000 K / 1 x 952 lm	24 V DC
-B69-139-2		1 x 12 W / 3000 K / 1 x 1284 lm	24 V DC
-B69-139-3		1 x 7.98 W / 4000 K / 1 x 1047 lm	24 V DC
-B69-139-4		1 x 12 W / 4000 K / 1 x 1328 lm	24 V DC
-B39-19-1	39°x19°	1 x 19 W / 2700-6500 K / 1 x 2038 lm	24 V DC
-B39-19-2		1 x 18 W / 3000 K / 1 x 1752 lm	24 V DC
-B39-19-3		1 x 18 W / 4000 K / 1 x 1944 lm	24 V DC
-B28-1	28°	1 x 18 W / 3000 K / 1 x 1752 lm	24 V DC
-B28-2		1 x 18 W / 4000 K / 1 x 1944 lm	24 V DC

3 DIMMING OPTIONS:

- NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 02/18/2026



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-001539.BUFTTUNEL-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

**Example:
CODE: BB-001539.BUFTTUNEL-GH-
B69-139-1-DIM-AC205-IP66**

**BB-001539.BUFTTU
NEL-GH-B69-
139-1-DIM-AC205-
IP66**

5

ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC279

IP 68 connector for through wiring 4P




-AC335

Rough-in housing 615mm



-AC551

Extraction tool Traccia



-AC286

FOR 28° / 39°x19°

Anti glare louver Tratto 600mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 02/18/2026