



**BULLARD
BOLLARDS**
Think Bollard Think Bullard


MICROBUNNY PURE 2L 32 (INGROUND LUMINAIRES)



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



GENERAL INFORMATION:

The MICROBUNNY PURE 2L 32 is an ultra-compact recessed in-ground luminaire that whispers light along paths with precision grazing illumination, turning subtle cues into visible wayfinding that feels almost instinctive. Its marine-grade stainless steel body and UV-resistant diffuser are sealed with silicone gaskets and the water-lock system to resist moisture and the harshest outdoor conditions for years. The tiny fixture defies its size by surviving up to 1102.31 lb of pedestrian loading while disappearing into the surface it lights. Sleek, resilient, and engineered for lasting performance, it redefines how minimal light can shape outdoor spaces

FIXTURE TYPE:

Inground Luminaires

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

MATERIAL:

Stainless steel AISI 316L
Extruded aluminum EN AW-6060 T5 high resistance to oxidation

GASKETS:

Silicone gaskets

ROUGH IN HOUSING:

Thermoplastic to be ordered separately

DRAINAGE:

20.0cm of gravel or draining material.
Alternatively, draining piping system.

STATIC LOAD:


1102.31 lb WalkOver

CRI:

>80

DRIVER POSITION:

Remote

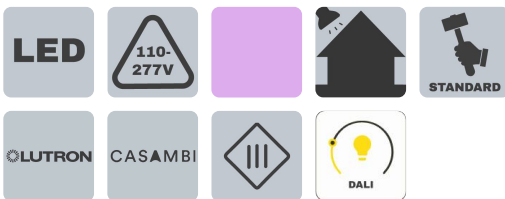

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



IP RATING:

IP68

APPLINCE CLASS:

III

CUTOUT SHAPE:

Round

CABLE ENTRY:

Nylon cable gland M12 Ø 0.35/0.7 cm

CABLE TYPE:

FR5FOEM7-AD8 2x0.005cm2

WATER-LOCK SYSTEM:

Cable gland with anti-moisture suction system, preventing the capillary rise of water or condensation along the cable and ensuring maximum protection of the luminaire body and electrical components

CORD LENGTH:

50 cm

LIGHT DISTRIBUTION:

10° x 55° Other

BEAM DIRECTIONABILITY:

Fixed optics

DIFFUSER MATERIAL/TEMPERATURE:


Technopolymer / < 313.15 K (< 40 °C)

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- Wide range of finishes
- Evocative / Functional design
- Resistant to vandalism
- Reduced depth of recess
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- * upon request previous specific components and test

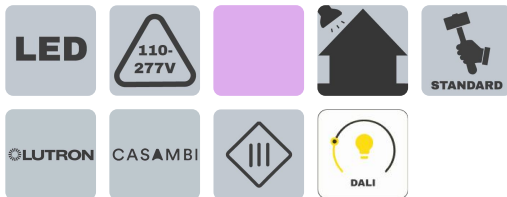

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

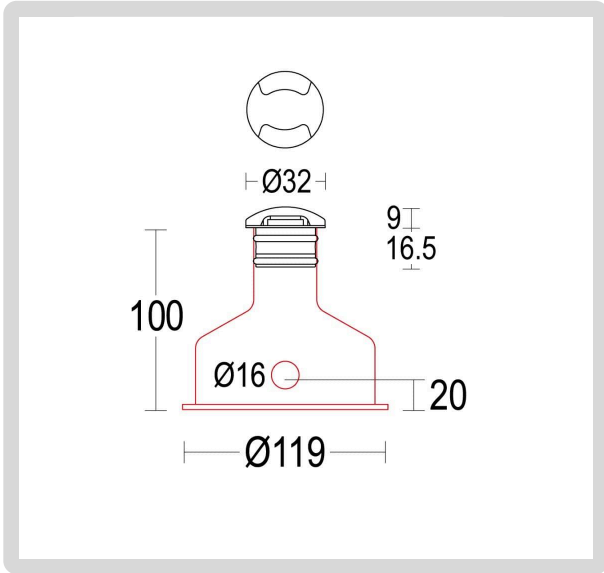

HOW TO ORDER:

CODE:

Example:
CODE: BB-1378.00BAXO-GH-K30-24V-
DIM-15-AC204-AC610

BB-1378.00BAXO-
GH-K30-24V-
DIM-15-AC204-AC610

1 DIMENSIONS:

Diameter - Ø: 1.26" (3.2 cm)
Height - H: 0.35" (0.9 cm)
Recessed hole diameter - Ø: 1.02" (2.6 cm)
Recessed depth - h: 1.30" (3.3 cm)

2 BEAM ANGLE:

10° x 55°

3 LIGHT SOURCE:

LED / 1 x 1 W

4 CCT&LUMENS:

-K30 3000K = 120 lm
-K40 4000K = 130 lm

5 CONTROL GEAR / OPERATION RANGE:


-24V 24 V DC
-350 350 mA

6 DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-LT Lutron
-DAL Dali

7 FINISH OPTIONS:

-15 Stainless steel
-Cus* Custom on request

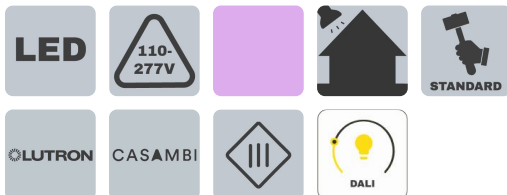

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

**Example:
CODE: BB-1378.00BAXO-GH-K30-24V-
DIM-15-AC204-AC610**

BB-1378.00BAXO-
GH-K30-24V-
DIM-15-AC204-AC610

8 ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC295

Wall recessed rough-in housing 503





-AC610

Rough-in housing 30x105



9 PHOTOMETRY:

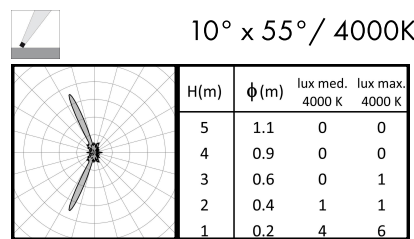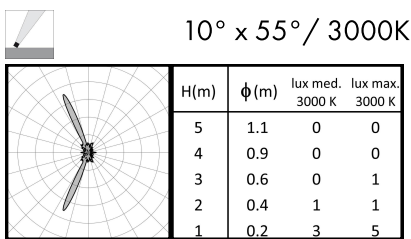

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA