



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

SLICK WILLY OMNI TWIST
BB-SLWLOT-CL





FIXTURE TYPE: _____

PROJECT NAME: _____

-24V/48V.3D1919.LOT



-24V/48V.3D2020.LOT



GENERAL INFORMATION:

Engineered for architectural excellence, this high-performance silicone neon LED delivers refined, shadow-free illumination with exceptional durability across demanding environments. Featuring a high-efficiency light source (LM80 certified) and a precision optical distribution design, it ensures perfectly uniform light with no visible dots or shadows; pure, continuous elegance. Crafted using an advanced three-color silicone extrusion process, the strip offers superior flexibility, clean cutting accuracy, and a sleek, dust-resistant finish. Compared to traditional PVC solutions, its premium silicone body provides enhanced resilience and a more sophisticated aesthetic. Built to endure, it resists UV exposure, corrosion, saline environments, acids, and alkalis, making it ideal for both indoor and outdoor architectural applications.

FIXTURE TYPE:

Arch LED Neon

MATERIAL:

Three-color silicone extrusion process

IP RATING:

IP67

IP67

IK RATING:

IK08

IK08

WARRANTY:

5 year warranty, high reliability

DRIVER POSITION:

Remote

MAIN FEATURES:

Light source: High luminous efficiency, LM80 proved.
Optical Design: Unique optical light distribution structure design.
Product Certification: UL, CE, ROHS, UKCA, CB
Working/Storage Temperature: Ta:-25~50°C / 0°C~60°C.
Product application: Signage lighting, Outdoor/indoor lighting, Architectural contour lighting.

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

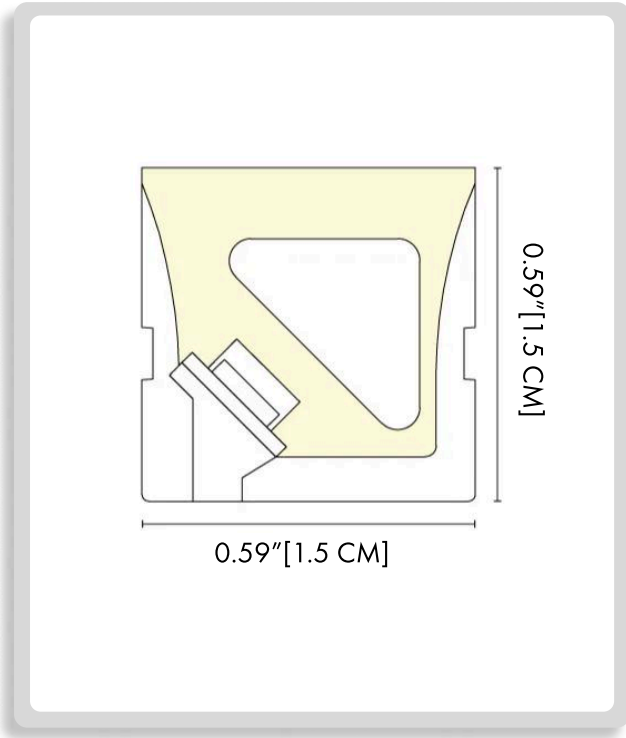


991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____



HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLOT-CL-48V.3D1919.LOT-AS-NM3D1515A-1000-OT

BB-SLWLOT-CL-48V.3D1919.LOT-AS-NM3D1515A-1000-OT

1 DIMENSIONS:

A) Length - L: 0.59" (1.5 cm)
B) Height - H: 0.59" (1.5 cm)

2 LIGHT SOURCE:

-24V.3D1919.LOT OPTION 41.6 mm/Cutting | and for 24V

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
1800K	1700-1900K	90	24	0.3 (0.09A/ft)	7.2 (2.19W/ft)	7.9 (2.41W/ft)
2200K	2050-2250K					
2700K	2550-2850K					
3000K	2900-3300K					
4000K	3850-4550K					

LUMENS	STANDARD LENGTH	REMARK
320(97LM/ft) 420(128LM/ft) 490(149LM/ft) 500(152LM/ft) 440(134LM/ft)	5000mm (16.4ft)	7LED/41.67mm

-24V.3D2020.LOT OPTION 41.6 mm/Cutting | and for 24V

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
1800K	1700-1900K	90	24	0.3 (0.09A/ft)	7.2 (2.19W/ft)	7.9 (2.41W/ft)
2200K	2050-2250K					
2700K	2550-2850K					
3000K	2900-3300K					
4000K	3850-4550K					

LUMENS	STANDARD LENGTH	REMARK
320(97LM/ft) 420(128LM/ft) 490(149LM/ft) 500(152LM/ft) 440(134LM/ft)	5000mm (16.4ft)	7LED/41.67mm

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

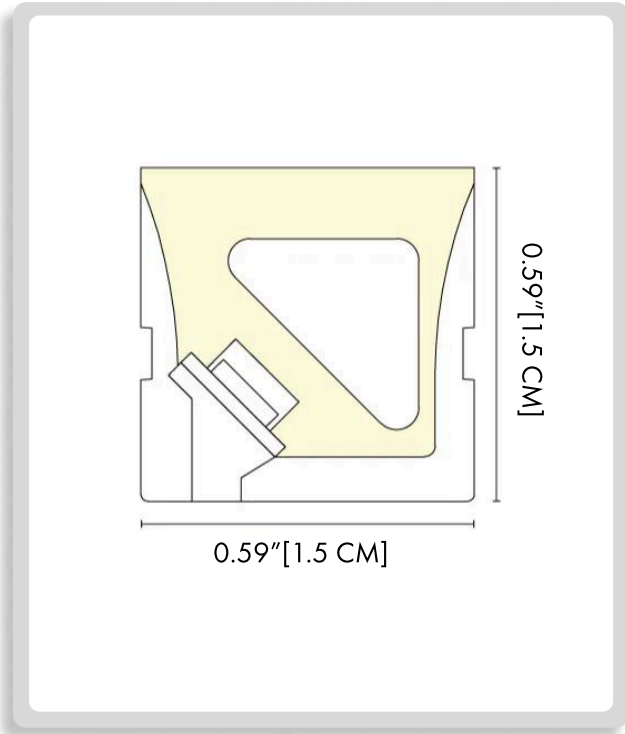


991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____



HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLOT-CL-48V.3D1919.LOT-AS-NM3D1515A-1000-OT

BB-SLWLOT-CL-48V.3D1919.LOT-AS-NM3D1515A-1000-OT

1 DIMENSIONS:

A) Length - L: 0.59" (1.5 cm)
B) Height - H: 0.59" (1.5 cm)

2 LIGHT SOURCE:

-48V.3D1919.LOT OPTION 41.6 mm/Cutting | and for 48V

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
1800K	1700-1900K	90	48	0.15 (0.05A/ft)	7.2 (2.19W/ft)	7.9 (2.41W/ft)
2200K	2050-2250K					
2700K	2550-2850K					
3000K	2900-3300K					
4000K	3850-4550K					

LUMENS	STANDARD LENGTH	REMARK
320(97LM/ft) 430(131LM/ft) 490(149LM/ft) 480(146LM/ft) 480(146LM/ft)	10000mm (32.8ft)	14LED/83.3mm

-48V.3D2020.LOT OPTION 41.6 mm/Cutting | and for 48V

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
1800K	1700-1900K	90	48	0.15 (0.05A/ft)	7.2 (2.19W/ft)	7.9 (2.41W/ft)
2200K	2050-2250K					
2700K	2550-2850K					
3000K	2900-3300K					
4000K	3850-4550K					

LUMENS	STANDARD LENGTH	REMARK
320(97LM/ft) 420(128LM/ft) 490(149LM/ft) 500(152LM/ft) 440(134LM/ft)	10000mm (32.8ft)	14LED/83.3mm

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____


HOW TO ORDER:


CODE:


Example:
CODE: BB-SLWLOT-CL-48V.3D1919.LOT-AS-
NM3D1515A-1000-OT


BB-SLWLOT-
CL-48V.3D1919.LOT-
AS-
NM3D1515A-1000-OT


3 ACCESSORIES:


- AS-TD-01-OT 


- AS-NM3D1515A-1000-OT 


- AS-NM3D1515GH0-EC-OT 


- AS-NM3D1515M-1000-OT 


- AS-NM3D1515M-500-OT 


- AS-NMT1515A-25-OT 


- AS-NMT1515A1-1000-OT 


- AS-NMT1515GD0-EC-OT 


- AS-PG-0002-OT 

- AS-WS-0001-OT 

- AS-WS-0002-OT 

- CP1-GBA-OT 

- CP1-GBB-OT 

- CR1-GBA-OT 

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA