



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



GENERAL INFORMATION:

The Arqis Wall Outdoor by Bullard Bollards transforms exterior walls into subtle architectural highlights, casting a balanced halo of light that enhances depth and texture without overpowering the space. Designed for modern outdoor environments, it blends precision engineering with a clean, sculptural form that feels both technical and elegant. Its advanced diffuser softens the LED source, creating a calm, glare-free glow that guides movement while maintaining a relaxed atmosphere. Built for long-term outdoor performance, the fixture combines durable materials and minimalist design to deliver lighting that feels both refined and quietly powerful.

FIXTURE TYPE:

Surface Mounted Wall Luminaires

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

MATERIAL:

Extruded aluminum EN AW-6060 T5 high resistance to oxidation, Metal

GASKETS:

Silicone gaskets

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

FINISH AND PROTECTION:

Primary treatment with nanoceramic conversion. Protection with textured polyester powder coating resistant to weathering and UV rays

DRIVER POSITION:

Integral

CRI:

>90

IP RATING:

IP65

APPLINCE CLASS:

I

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
 www.bullardbollards.com
 1-877-964-4646



991 South Gull Lake Dr
 Richland, MI 49083
 USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



CABLE ENTRY:

Nylon cable gland M12 Ø 0,35/0,7 cm

CABLE TYPE:

H05RN-F 3x0.01 cm²

CORD LENGTH:

50 cm

BEAM ANGLE:

79°

LIGHT DISTRIBUTION:

Diffuse - Full spherical

BEAM DIRECTIONABILITY:

Fixed optics

DIFFUSER MATERIAL/FINISH:

Polycarbonate /Transparent - extra clear

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- High visual comfort
- Wide range of finishes
- Evocative design
- Ease of installation
- Fine finishes and materials
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- * upon request previous specific components and test



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

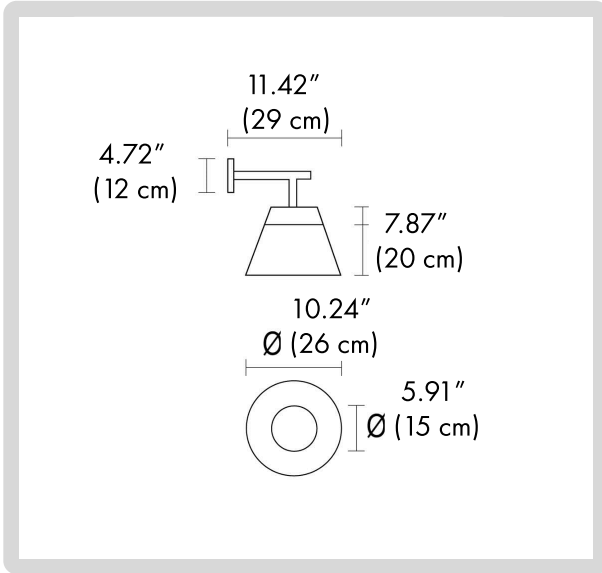

HOW TO ORDER:

CODE:

**Example:
CODE: BB-1998.00FAXT-GH-DIM-02**

BB-1998.00FAXT
-GH-DIM-02

1 DIMENSIONS:

Diameter - Ø: 10.24" (26 cm)
Recessed hole diameter - Ø: 4.72" (12 cm)

2 BEAM ANGLE:

79°

3 LIGHT SOURCE:

LED / 1 x 11.1 W / 3000K / 1745 lm / 110-277 V / 60 Hz

4 DIMMING OPTIONS:

- NON NON-Dimmable
- DIM 0-10V
- CAS Casambi
- DAL Dali

5 FINISH OPTIONS:

- 01 White matt
- 02 Black matt
- 05 Anthracite grey matt
- 19 Light grey matt
- 26 Bronze
- 45 Corten matt
- 62 Antique grey matt
- 65 Blue matt
- 80 Sand matt
- 83 Green matt

6 PHOTOMETRY:

79° / 3000K

	H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	8.3	10	24	
4	6.6	15	37	
3	5.0	27	67	
2	3.3	60	150	
1	1.7	240	600	



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA