




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

SPARK



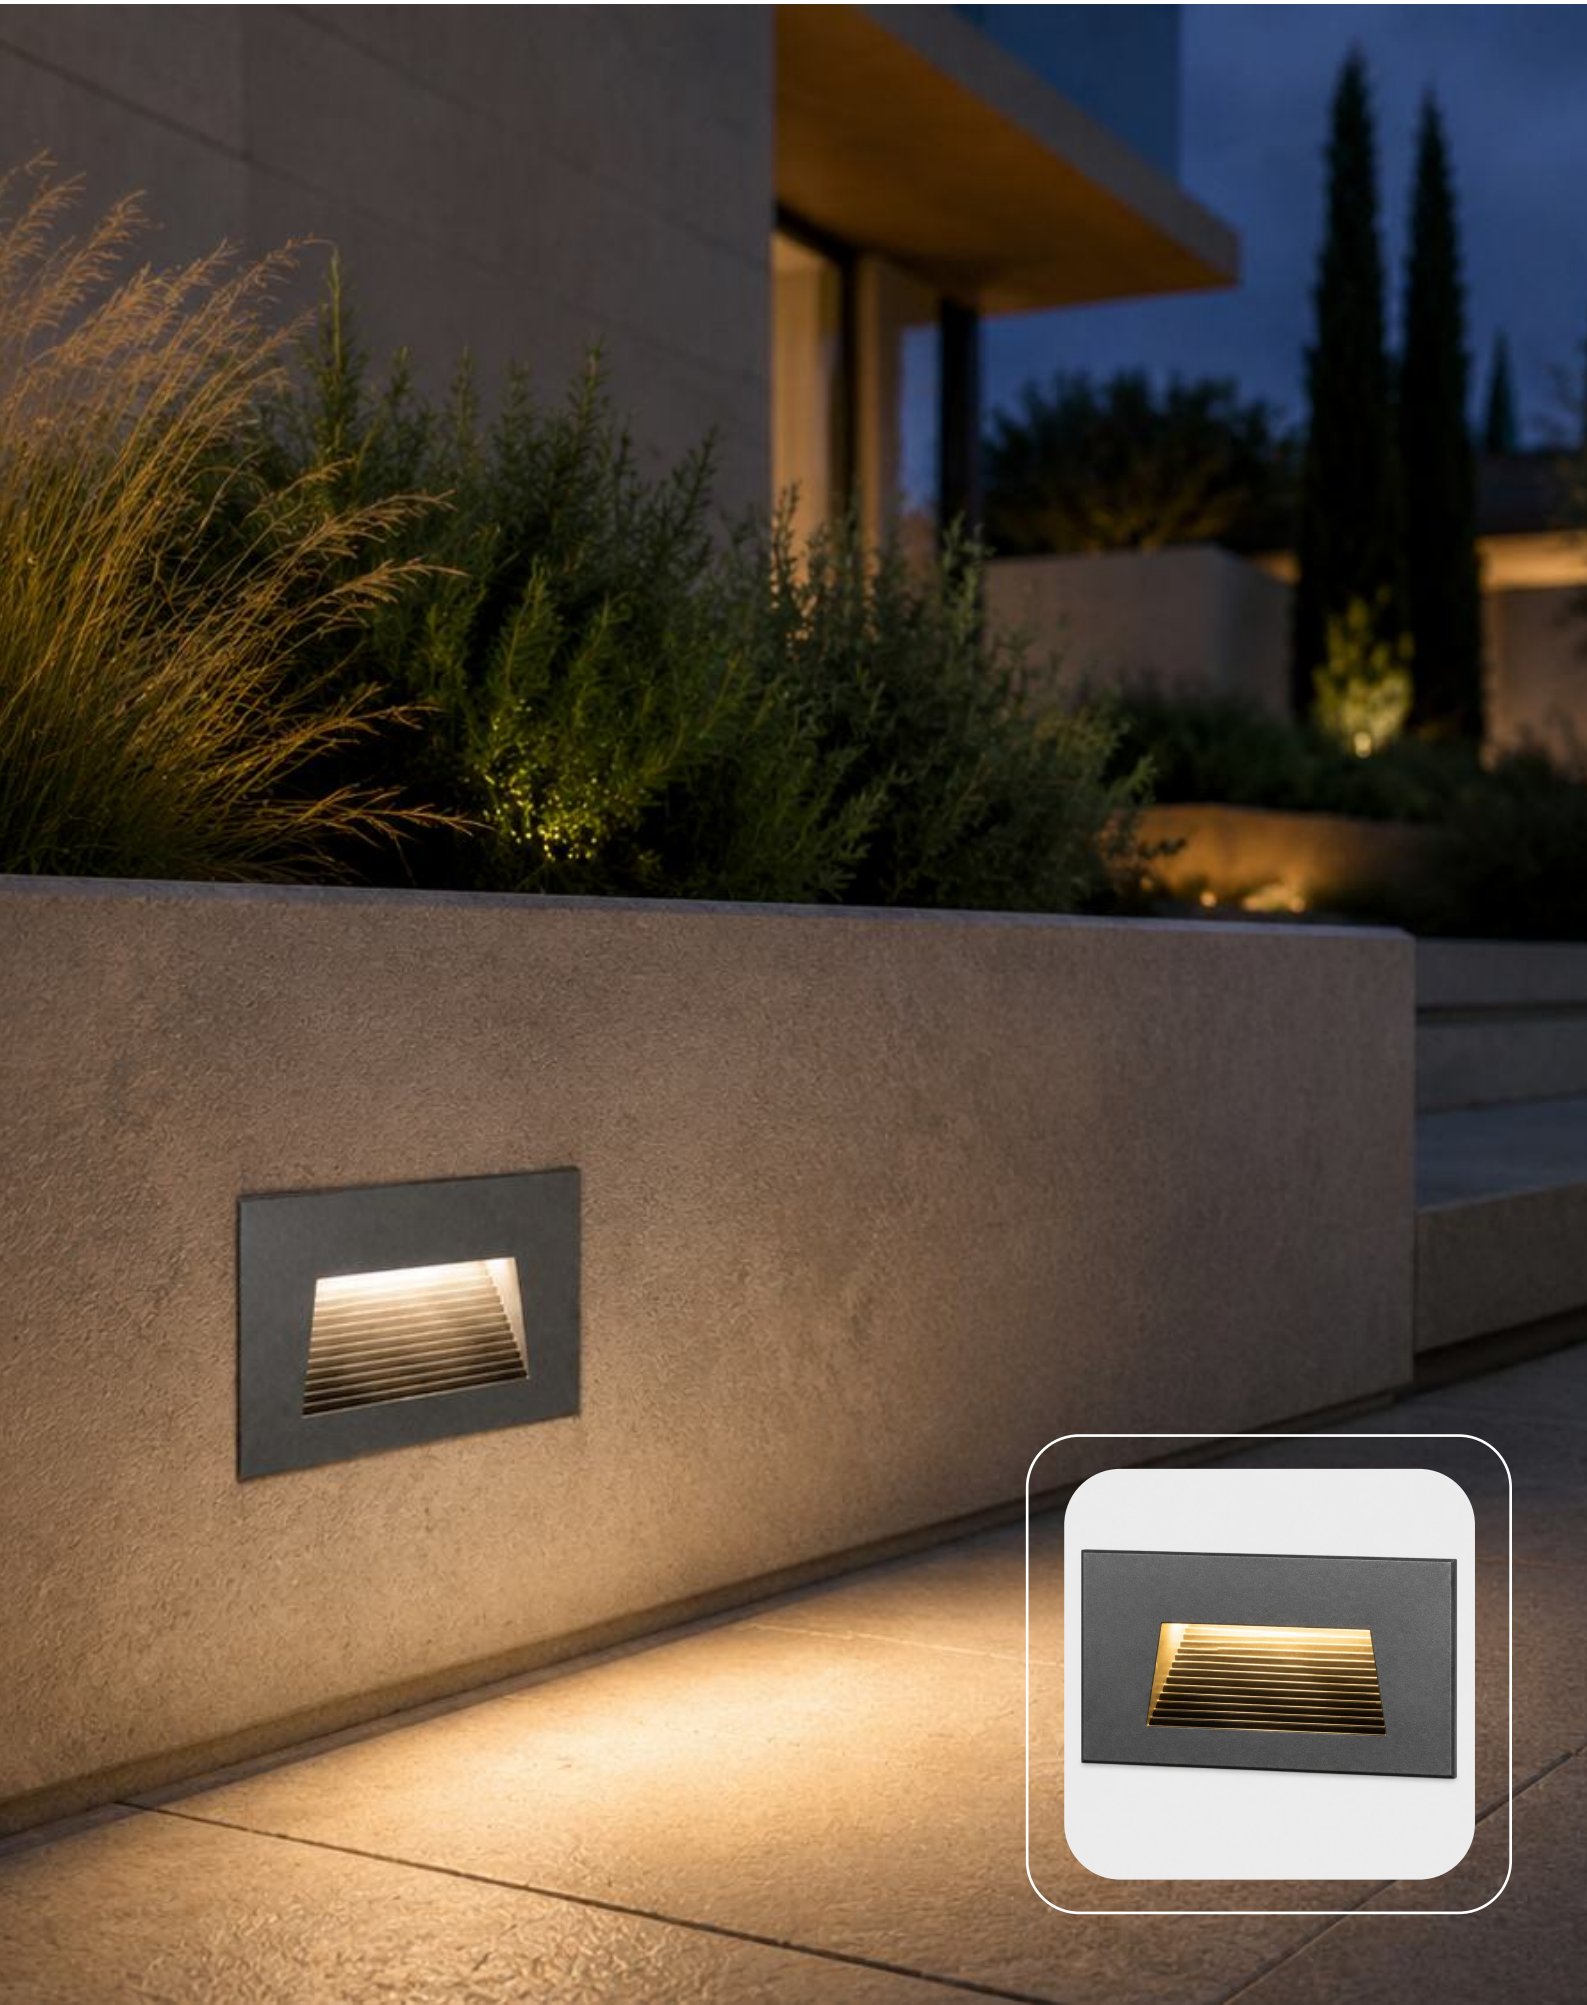

**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-SPK-KPG**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



GENERAL INFORMATION:

SPARK is a compact recessed architectural wall luminaire engineered for demanding indoor and outdoor applications. Measuring 180 × 110 × 62 mm, it combines a durable die-cast aluminium body with a glass light window, moulded silicone gasket, stainless-steel recessed sleeve and an IP67 nickel-coated copper cable gland. Its IP65 protection and IK10 impact-resistance rating provide reliable performance in exposed or high-traffic locations.

The luminaire incorporates 20 × 0.2 W NICHIA LEDs, delivering efficient illumination with a total power consumption of only 6.8 W. A CRI of 90 ensures accurate colour rendering, while selectable colour temperatures of 3000 K, 3500 K, 4000 K and 5000 K.

Designed to operate between -20°C and +40°C, the fixture is offered in Dark Grey KAP 7037, Silver Grey KAP 9022 and Sanded Black RAL 9005 finishes.

LIGHTING:

LED

LED

VOLTAGE:

110-277V



FRONT COVER:

12# Die-casting aluminum powder coated T=60-80µm.

Adhesion of ISO class 1/ASTM class 4B

FIXTURE TYPE:

Wall Recessed

HOUSING:

12# Die-casting aluminum powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

CABLE GLAND:

IP67 copper and nickel coated

GASKET:

Molding shaped silicone seal

RECESSED SLEEVE:

PC/ABS ALLOYS091#

LED DRIVER:

Constant Voltage Input, Constant Current Output

LIGHT WINDOW:

UVstop & Fireproof PC

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-SPK-KPG**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



OPERATING TEMPERATURE:

-20°C~40°C

CRI:

90

POWER CABLE:

Outside of luminaire H05RN-F 3×1.0mm², L=0.5m (110-277V)

CRI:

90

LED:

SMD3030

IP:

65

IK:

10

OPERATING CURRENT:

57mA

INPUT VOLTAGE:

110-277V

CONSUMPTION:

6.8W

LUMINANCE:

CW=1319 | WW=107

LIGHT SOURCE:

20 × 0.2W NICHIA

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-SPK-KPG**

FIXTURE TYPE: _____

PROJECT NAME: _____

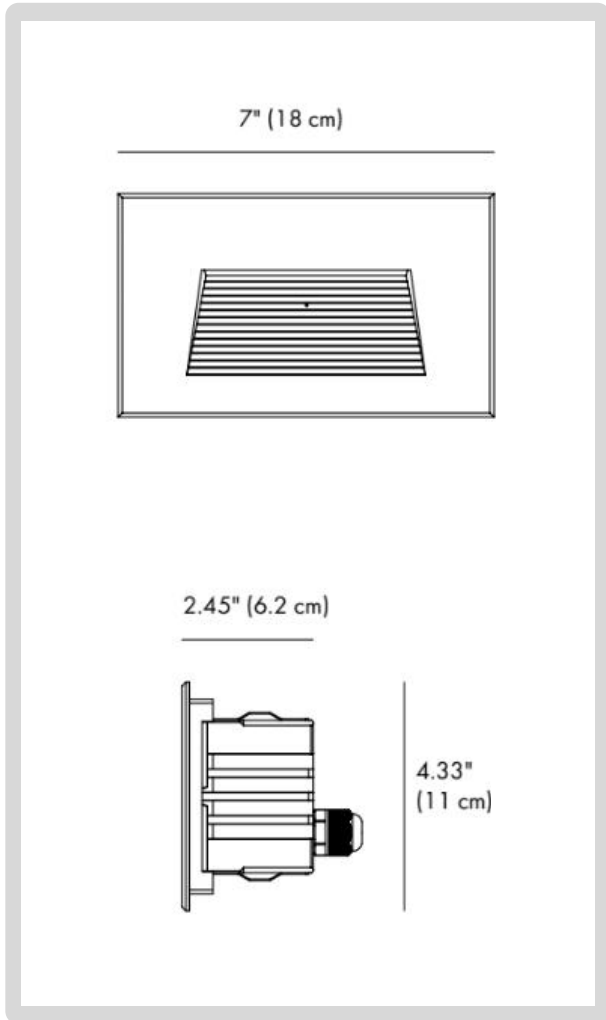

HOW TO ORDER:

CODE:

Example:
CODE: BB-SPK-KPG-DIM-30-DG

BB-SPK-KPG-
DIM-30-DG

1 MODELS:

LENGHT: 7" (18 CM)
WIDTH: 2.45" (6.2 CM)
HEIGHT: 4.33" (11 CM)

2 LIGHT SOURCE:

LED | 20 × 0.2W NICHIA

3 DIMMING OPTIONS:

-TRC Triac PWM Available
-DIM 0-10V
-DAL Dali

4 CCT OPTIONS:

-30 3000K
-35 3500K
-40 4000K
-50 5000K
-CUS CUSTOMIZABLE

5 FINISH OPTIONS:

-DG DARK GREY
-SG SILVER GREY
-SB SANDED BLACK

-KAP 7037
-KAP 9022
-RAL 9005



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 08/07/2026



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-SPK-KPG**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-SPK-KPG-DIM-30-DG


BB-SPK-KPG-
DIM-30-DG

6

RECESSED SLEEVE(INCLUDED):




091#

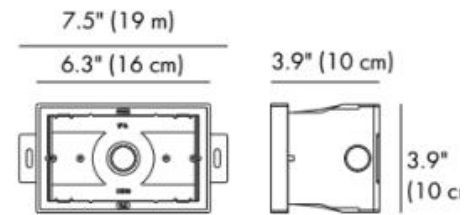



7

DIAGRAM OF INSTALLATION:

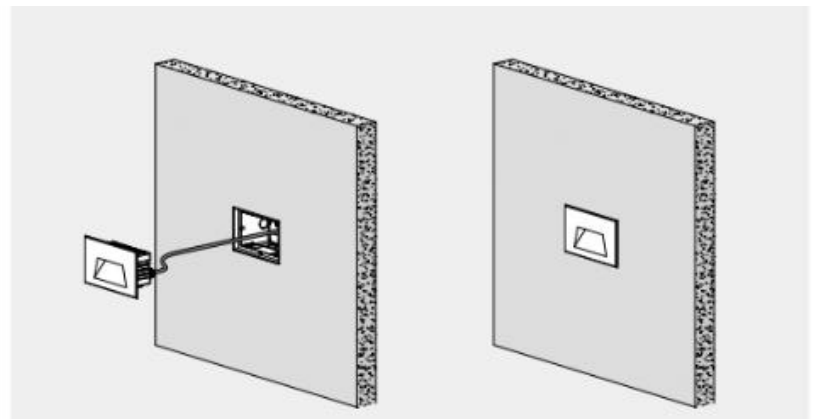

8

PHOTOMETRIC:

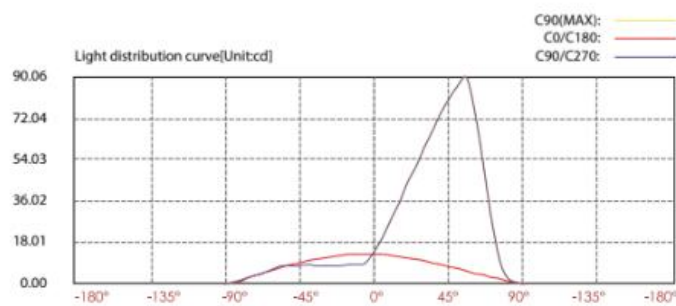

Lux distance curve

Center beam LUX	Beam width V	Beam width H
2m 3.25 LUX	1.70m	3.60m
4m 0.81 LUX	3.40m	7.20m
6m 0.36 LUX	5.10m	10.8m
8m 0.20 LUX	6.80m	14.4m
10m 0.13 LUX	8.50m	18.0m
12m 0.09 LUX	10.2m	21.6m

Ver.Spread:46.2 Horiz.Spread:84.0

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-SPK-KPG**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-SPK-KPG-DIM-30-DG

BB-SPK-KPG-
DIM-30-DG

9


FEATURES:



• Front cover without screws



• Use the high-strength clips for installation and fixation. (please refer remark 1 & 2)

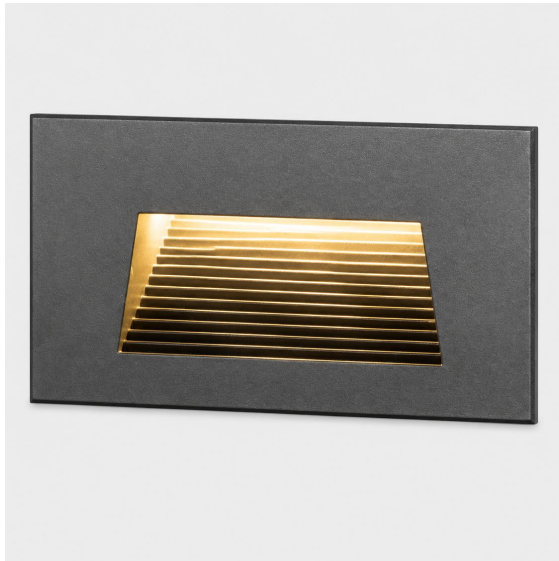

LED

IP65



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 08/07/2026