

PRODUCT INFO:

Installation type:	Wall mounted, wall recessed
Environments:	Urban landscape, façades and architectural works, hallway, industrial areas
Mounting type:	Surface
Mounting note:	Installation with quick connector IP67 integrated. Pole and pole mounting joint are accessories to be ordered separately.
Body:	Corrosion resistant die-cast aluminium body.
Painting:	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment). AISI 304 stainless steel screws.
Screws:	Silicone Rubber.
Standard Colour:	GR graphite satin finish.
Option colors:	AL aluminium grey.

DIMENSIONS:

Total device height: (mm)	150(5.90")
Total device width: (mm)	280(11")

OPTICAL:

Optical System:	Safety tempered protective glass, with light diffusing texture.
Beam:	Diffuse
Emission:	Direct
Adjustable:	No
Reflectors:	Extra-pure aluminium reflector.



LIGHTING SOURCE:

MacAdam:	Step 3
Output Flux:	370 lm
Source:	LED
Source type:	7W
Temperature colour:	4000K CRI>80

ELECTRICAL:

Ballast type:	ON-OFF.
Frequency:	50-60Hz
Lifetime:	50.000h L70B20 (Ta=25°C)
Line input:	Use only (EN 60598-1) a three core H07RN-F rubber cable with diameter between 7,5 and 12mm.
Mounting ballast type:	Integral
Voltage:	110-277V
Separate ignition:	No
Emergency 1E:	No
Emergency 3E:	No

PHOTOMETRICS:

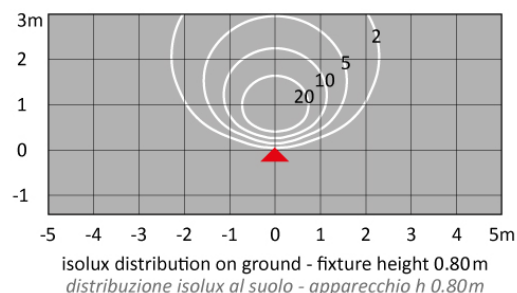



OPTIONAL ACCESORIES:



D08/CI

Rough-in housing for flush mounting. The recessed mounting of block model makes necessary (and very useful) to use a proper box fitted into the masonry itself. This in order to avoid electro-chemical corrosion due to the direct contact metal/concrete, to allow the proper entry and connection of the feeding wires and the easy drawing out of the fixture in case of maintenance.



D08/GD-GR

Directional anti-glaring grid. Directional grid louver trim with parallel shielding fins in sturdy die-cast light alloy -GR GRAPHITE. Provides anti-glare and mechanical protection against shocks and vandalism.

