



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

BUNNY PURE 2L 45 (INGROUND LUMINAIRES)






FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



GENERAL INFORMATION:

The Bunny Pure 2L 45 is a subtly powerful recessed ground light that casts a precisely controlled grazing beam, turning everyday paths and thresholds into elegantly defined lines of ambience. Its marine-grade stainless steel body and UV-resistant diffuser are sealed with silicone gaskets and water-lock system to resist moisture, salt air, and outdoor exposure for years of performance. The fixture disappears into the terrain yet endures up to 1102.31 lb of foot traffic, blending resilience with refined minimalism. Thoughtfully engineered for seamless integration and enduring reliability, it elevates outdoor circulation spaces with a quiet sophistication no one expects from ground lighting.

FIXTURE TYPE:

Inground Luminaires

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

MATERIAL:

Stainless steel AISI 316L
Extruded aluminum EN AW-6060 T5 high resistance to oxidation

GASKETS:

Silicone gaskets

ROUGH IN HOUSING:

Thermoplastic to be ordered separately

DRAINAGE:

20.0cm of gravel or draining material. Alternatively, draining piping system.

STATIC LOAD:


1102.31 lb WalkOver

CRI:

>80

DRIVER POSITION:

Remote

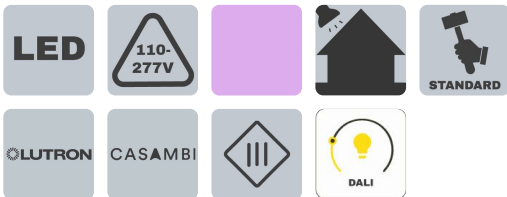

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



IP RATING:

IP68

APPLINCE CLASS:

III

CUTOUT SHAPE:

Round

CABLE ENTRY:

Nylon cable gland M12 Ø 0.35/0.7 cm

CABLE TYPE:

FR5FOEM7-AD8 2x0.005cm2

WATER-LOCK SYSTEM:

Cable gland with anti-moisture suction system, preventing the capillary rise of water or condensation along the cable and ensuring maximum protection of the luminaire body and electrical components

CORD LENGTH:

50 cm

LIGHT DISTRIBUTION:

55° x 30° Other

BEAM DIRECTIONABILITY:

Fixed optics

DIFFUSER MATERIAL/TEMPERATURE:


Technopolymer / < 313.15 K (< 40 °C)

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- Wide range of finishes
- Evocative / Functional design
- Resistant to vandalism
- Reduced depth of recess
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- * upon request previous specific components and test

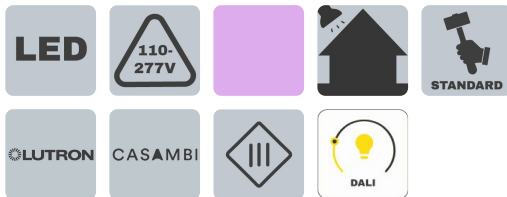

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

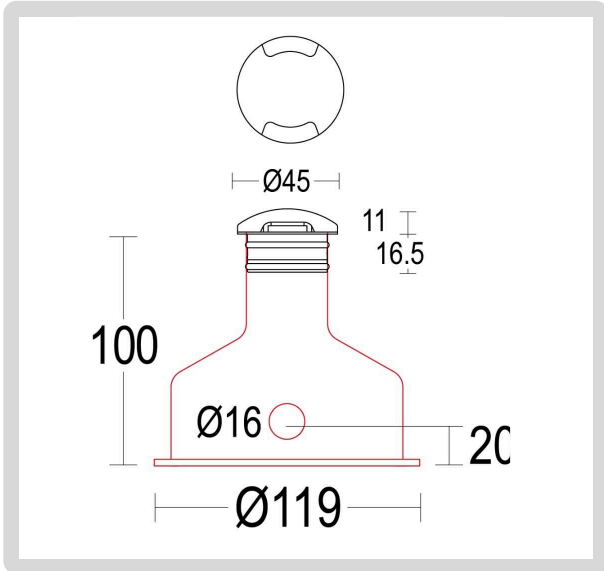

HOW TO ORDER:

CODE:

Example:
CODE: BB-1380.00BAXO-GH-K30-24V-
DIM-15-AC204-AC611

BB-1380.00BAXO
-GH-K30-24V-
DIM-15-AC204-AC611

1 DIMENSIONS:

Diameter - Ø: 1.77" (4.5 cm)
Height - H: 0.43" (1.1 cm)
Recessed hole diameter - Ø: 1.42" (3.6 cm)
Recessed depth - h: 1.30" (3.3 cm)

2 BEAM ANGLE:

55° x 30°

3 LIGHT SOURCE:

LED / 1 x 1.5 W

4 CCT&LUMENS:

-K30 3000K = 170 lm
-K40 4000K = 180 lm

5 CONTROL GEAR / OPERATION RANGE:


-24V 24 V DC
-500 500 mA

6 DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-LT Lutron
-DAL Dali

7 FINISH OPTIONS:

-15 Stainless steel
-Cus* Custom on request

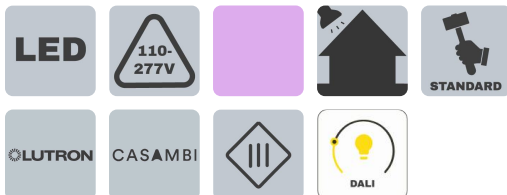

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-1380.00BAXO-GH-K30-24V-
DIM-15-AC204-AC611

BB-1380.00BAXO
-GH-K30-24V-
DIM-15-AC204-AC611

8 ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC296

Wall recessed rough-in housing 503



-AC611

Rough-in housing 40x105



9 PHOTOMETRY:



55° x 30° / 3000K



55° x 30° / 4000K



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA