



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

SLICK WILLY CLIMATE SEAL
BB-SLWLCS-CL





FIXTURE TYPE: _____

PROJECT NAME: _____

SL.WL.TD.24V



SL.WL.TDC.24V



GENERAL INFORMATION:

SLICK WILLY THERMO GUARD is designed for high-performance wellness spaces, this premium LED strip delivers a warm, soothing glow that enhances the sauna experience with understated elegance.

Engineered to withstand up to 125°C, it performs flawlessly under intense heat and humidity. Advanced Flip-Chip technology ensures efficient heat dissipation, while IP67 sealing protects against moisture and condensation. A reinforced anti-breakage PCB structure and enhanced soldering provide exceptional durability, even during installation. Dual-chip LED technology guarantees smooth, continuous illumination-free from dark spots, even if a single chip fails.

FIXTURE TYPE:

Arch LED Neon

MATERIAL:

A reinforced anti-breakage PCB structure

IP RATING:

IP67

IP67

IK RATING:

IK08

IK08

WARRANTY:

5 year warranty, high reability

DRIVER POSITION:

Remote

MAIN FEATURES:

Dual chips parallel LEDs technology.

Reinforced wire soldering.

Flip-Chip for direct heat dissipation up to 110°C temperature resistance

Excellent protective performances.



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA



FIXTURE TYPE: _____

PROJECT NAME: _____

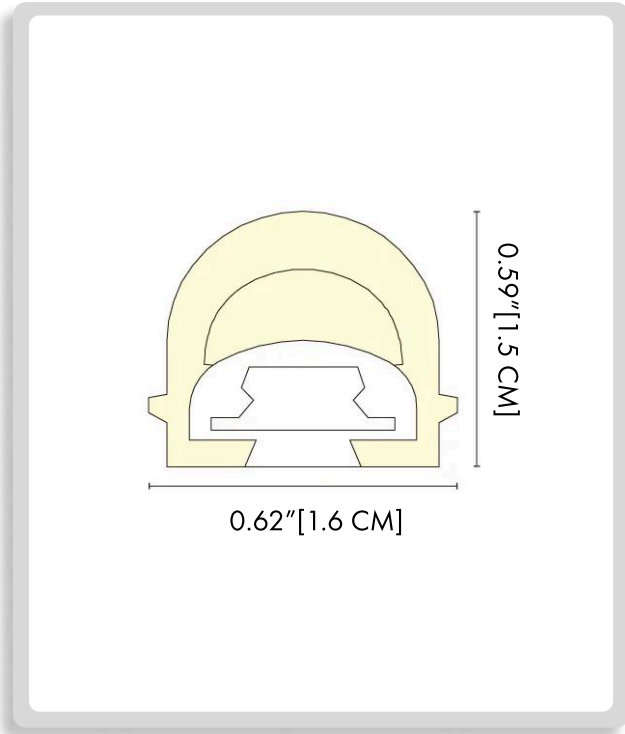

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLCS-CL-SL.WL.TD.24V-AS-JD-UF24

BB-SLWLCS-CL-SL.WL.TD.24V-AS-JD-UF24

1 DIMENSIONS:

A) Length - L: 0.62" (1.6 cm)
B) Height - H: 0.59" (1.5 cm)

2 LIGHT SOURCE:

SL.WL.TD.24V

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
2200 K	2150-2400 K	>90	24	0.2 (0.06A/ft)	5 (1.53W/ft)	5.5 (1.68W/ft)
2700 K	2500-2730 K					
3000 K	2920-3170 K					
4000 K	3770-4220 K					
6500 K	6100-6900 K					

LUMENS	STANDARD LENGTH	REMARK
345(105LM/ft) 360(110LM/ft) 390(119LM/ft) 420(128LM/ft) 455(139LM/ft)	15000mm (49.21ft)	16LED/50mm

SL.WL.TDC.24V

CCT	COLOR RANGE	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
RGB	RGB	24	0.3 (0.09A/ft)	7.2 (2.20W/ft)	7.9 (2.41W/ft)

LUMENS	STANDARD LENGTH	REMARK
108(33LM/ft)	5000mm (16.4ft)	6*3LED/50mm

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLCS-CL-SL.WL.TD.24V-AS-JD-UF24


BB-SLWLCS-CL-
SL.WL.TD.24V-AS-
JD-UF24

4 ACCESSORIES FOR -SL.WL.TG.24V:

AS-JD-UF24



AS-NMS1217-UF24



AS-NMS1217A-UF24



AS-NMS1217A-UF24



AS-NMS1217A1-UF24



AS-NMS1217A1-UF24



AS-NMS1217M1-UF24



AS-NMS1217P-UF24



AS-NMS1217P-UF24



AS-NNS1224GH0-UF24



AS-PG-UF24



AS-GBA-UF24



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:


CODE:

Example:
CODE: BB-SLWLCS-CL-SL.WL.TD.24V-AS-JD-UF24

BB-SLWLCS-CL-
SL.WL.TD.24V-AS-
JD-UF24

4 ACCESSORIES FOR -SL.WL.TGC.24V:

AS-JD-UF24



AS-NMS1217-UF24



AS-NMS1217A-UF24



AS-NMS1217A-UF24



AS-NMS1217A1-UF24



AS-NMS1217A1-UF24



AS-NMS1217M1-UF24



AS-NMS1217P-UF24



AS-NMS1217P-UF24



AS-NNS1224GH0-UF24



AS-PG-UF24



AS-GBA-UF24



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLCS-CL-SL.WL.TD.24V-AS-JD-UF24

BB-SLWLCS-CL-
SL.WL.TD.24V-AS-
JD-UF24

6

BASIC PARAMETERS:

FOR MODEL: **-SL.WL.TGC.24V**

WARRANTY: 5 YEARS
CUTTING UNIT: 50 mm
LEDS QTY: 360LEDs/m
TYP. POWER: 7.2W/M

FOR MODEL: **-SL.WL.TG.24V**

WARRANTY: 5 YEARS
CUTTING UNIT: 50 mm
LEDS QTY: 320LEDs/m
TYP. POWER: 5W/M

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA