



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

SEGNO SPOT S STEEL 45 SPOTLIGHT





**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-1172.BAST-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



STANDARD



CASAMBI

GENERAL INFORMATION:

Micro Segno Spot 25 is a compact outdoor micro spot light designed for precise architectural and landscape illumination, combining minimalist design with high-performance durability. Constructed from AISI 316L stainless steel and high-resistance extruded aluminum, with tempered glass optics and silicone gaskets, it delivers reliable operation in demanding outdoor environments and is fully protected with an IP67 rating. The adjustable head allows accurate beam aiming, while multiple beam angles, color temperatures, and control options—including ON/OFF, 0–10V, DALI, and Casambi—provide flexibility for a wide range of applications. Ideal for highlighting trees, façades, pathways, and architectural details, the Micro Segno Spot 25 offers refined aesthetics, robust construction, and long-lasting LED performance.

GASKETS:

Silicone gaskets

APPLICATION FIELD:

Series of spot lights to be mounted on floor, wall, spike, tree with belt system or on a pole system.

VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L

Extruded aluminum EN AW-6063 T5 high resistance to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 4mm

IP RATING:

IP 67

IP67

APPLINCE CLASS:

|||

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-1172.BAST-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI

DRIVER POSITION:

Remote

CRI:

>90

CONTROL GEAR TYPE:

Electronic

CABLE ENTRY:

Brass cable gland M12 Ø 3.5/7 mm

CORD LENGTH:

0.5m

SWIVEL:

+/- 90°

LIGHT DISTRIBUTION:

Symmetrical medium flood (15° - 45°)

BEAM DIRECTIONABILITY:

Adjustable

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort
Wide range of finishes
Functional design
Minimal design
Shock resistant
Operating Temperature: -22°F~122°F

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2025 All Rights Reserved

Updated 01/27/2026




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-1172.BAST-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

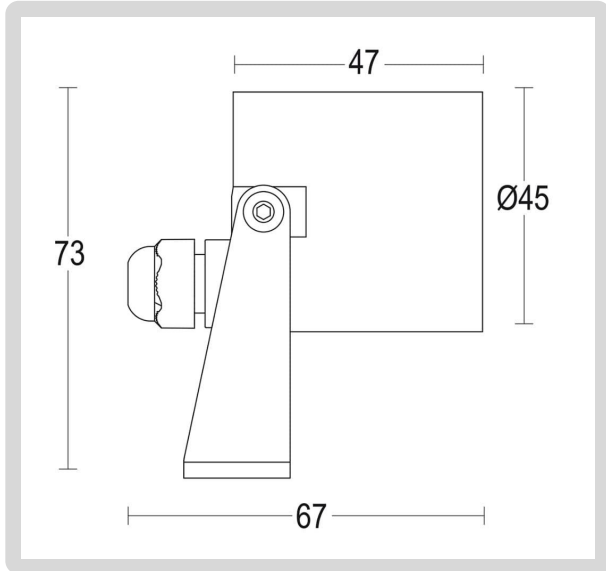

HOW TO ORDER:

CODE:

Example:

CODE: BB-1172.BAST-GH-L1-B1-DIM-24V-AC204

BB-1172.BAST-GH

1 DIMENSIONS:

- A) Diameter - Ø: 1.77" (4.5 cm)
B) Length - L: 2.64" (6.7 cm)
C) Height - H: 2.87" (7.3 cm)

2 LIGHT SOURCE:

- L1 LED / 1 x 2.1 W / 3000 K / 1 x 196 lm
-L2 LED / 1 x 2.1 W / 4000 K / 1 x 218 lm

3 BEAM ANGLE:

- B1 14°
-B2 17°

4 DIMMING OPTIONS:

- NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

5 CONTROL GEAR / OPERATION RANGE:

- 24V 24 V DC
-500 700 mA

6 FINISH OPTIONS:

Stainless Steel

7 ACCESSORIES:

-AC204

IP 68 fast
connector 4P



-AC205-IP66

IP66 remote
power supply box



-AC203

Stake 170mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2025 All Rights Reserved

Updated 01/27/2026