

CODE:

BO-D1G1807-WL

LIGHT SOURCE:

18 × 0.05W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

17 mA

CONSUMPTION:

1.8W

LUMINANCE:

CW=49 | WW=46

IK:

10

FRONT COVER

12# Die-casting aluminum powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

HOUSING

12# Die-casting AL9005 powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

LIGHT WINDOW

Glass

CABLE GLAND

IP67 copper and nicked coated

GASKET

Molding shaped silicone seal

RECESSED SLEEVE

Stainless steel 136#

LED DRIVER

Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE

-20°C~40°C

POWER CABLE

Outside of luminaire
H05RN-F 3×1.0mm², L=0.5m (110-277V)

LED

SMD3030

IP

IP65

DIMMING SUPPORT

Triac PWM Available
1-10V Dali Customized


REGULAR PAINTING COLOR

Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

RECESSED SLEEVE (Included)



136#
Stainless steel

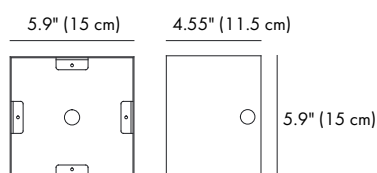

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

LUXE

HOW TO ORDER: CODE:

EXAMPLE:
BO-D1G1807-WL-BKAP 7037

BO-D1AL2832-
WL-BKAP 7037

1. CHOOSE FIXTURE SIZE:

BO-D1G1807-WL

2. BODY FINISH OPTIONS:

- BKAP 7037 Dark Grey
- RAL 9023 Silver Grey
- RAL 9005 Sanded Black

CODE: BO-D1G1807-WL

