



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**SLICK WILLY TWIST CORE**  
BB-SLWLTE-CL





FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

-24V.3D1515.LTE



-24V.3D1616.LTE



**GENERAL INFORMATION:**

Engineered for architectural excellence, this high-performance silicone neon LED delivers refined, shadow-free illumination with exceptional durability across demanding environments. Featuring a high-efficiency light source (LM80 certified) and a precision optical distribution design, it ensures perfectly uniform light with no visible dots or shadows; pure, continuous elegance. Crafted using an advanced three-color silicone extrusion process, the strip offers superior flexibility, clean cutting accuracy, and a sleek, dust-resistant finish. Compared to traditional PVC solutions, its premium silicone body provides enhanced resilience and a more sophisticated aesthetic. Built to endure, it resists UV exposure, corrosion, saline environments, acids, and alkalis, making it ideal for both indoor and outdoor architectural applications.

**FIXTURE TYPE:**

Arch LED Neon

**MATERIAL:**

Three-color silicone extrusion process

**IP RATING:**

IP67

IP67

**IK RATING:**

IK08

IK08

**WARRANTY:**

5 year warranty, high reliability

**DRIVER POSITION:**

Remote

**MAIN FEATURES:**

Light source: High luminous efficiency, LM80 proved.  
Optical Design: Unique optical light distribution structure design.  
Product Certification: UL, CE, ROHS, UKCA, CB  
Working/Storage Temperature: Ta:-25~50°C / 0°C~60°C.  
Product application: Signage lighting, Outdoor/indoor lighting, Architectural contour lighting.



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646




991 South Gull Lake Dr  
Richland, MI 49083  
USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

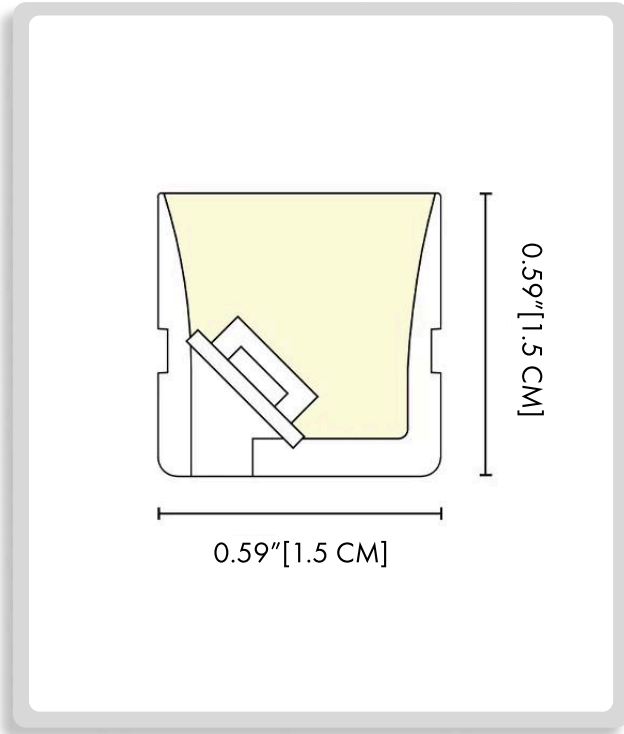

**HOW TO ORDER:**

**CODE:**

**Example:**  
CODE: BB-SLWLTE-CL-24V.3D1515.LTE-AS-TD-01-TE

BB-SLWLPC-  
CL-24V.3D1515.LTE-  
AS-TD-01-TE

**1 DIMENSIONS:**

A) Length - L: 0.59" (1.5 cm)  
B) Height - H: 0.59" (1.5 cm)

**2 LIGHT SOURCE:**

-24V.3D1515.LTE OPTION 12W/M

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
2700 K	2650-2750K	90	24	0.5 (0.15A/ft)	12 (3.66W/ft)	13.2 (4.02W/ft)
3000 K	2850-3050K					
4000 K	3850-4050K					

LUMENS	STANDARD LENGTH	REMARK
800(244LM/ft) 820(250LM/ft) 835(255LM/ft)	5000mm (16.4ft)	7LED/41.67mm

-24V.3D1616.LTE OPTION 7.2W/M

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
2700 K	2650-2750K	90	24	0.5 (0.15A/ft)	12 (3.66W/ft)	13.2 (4.02W/ft)
3000 K	2850-3050K					
4000 K	3850-4050K					

LUMENS	STANDARD LENGTH	REMARK
800(244LM/ft) 820(250LM/ft) 835(255LM/ft)	5000mm (16.4ft)	7LED/41.67mm

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BB-SLWLTE-CL-24V.3D1515.LTE-AS-TD-01-TE

BB-SLWLPC-  
CL-24V.3D1515.LTE-  
AS-TD-01-TE

**3 ACCESSORIES:**


AS-TD-01-TE




AS-PG-0002-TE



AS-NM3D1515A-1000-TE




AS-WS-0001-TE



AS-NM3D1515GH0-EC-TE



AS-WS-0002-TE



AS-NM3D1515M-1000-TE



CP1-GBA-TE



AS-NM3D1515M-500-TE



CP1-GBB-TE



AS-NMT1515A-25-TE



CR1-GBA-TE



AS-NMT1515A1-1000-TE



AS-NMT1515GD0-EC-TE



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA