



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

SLICK WILLY SUBMERSA
BB-SLWLSM-CL





**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-SLWLSM-CL**

FIXTURE TYPE: _____

PROJECT NAME: _____

-24V.3D1919.SM



GENERAL INFORMATION:

Engineered for architectural excellence, this high-performance silicone neon LED delivers refined, shadow-free illumination with exceptional durability across demanding environments. Featuring a high-efficiency light source (LM80 certified) and a precision optical distribution design, it ensures perfectly uniform light with no visible dots or shadows; pure, continuous elegance. Crafted using an advanced three-color silicone extrusion process, the strip offers superior flexibility, clean cutting accuracy, and a sleek, dust-resistant finish. Compared to traditional PVC solutions, its premium silicone body provides enhanced resilience and a more sophisticated aesthetic. Built to endure, it resists UV exposure, corrosion, saline environments, acids, and alkalis, making it ideal for both indoor and outdoor architectural applications.

FIXTURE TYPE:

Arch LED Neon

MATERIAL:

Three-color silicone extrusion process

IP RATING:

IP68

IP67

IK RATING:

IK10

IK08

WARRANTY:

5 year warranty, high reliability

DRIVER POSITION:

Remote

MAIN FEATURES:

Light source: High luminous efficiency, LM80 proved.
Optical Design: Unique optical light distribution structure design.
Product Certification: UL, CE, ROHS, UKCA, CB
Working/Storage Temperature: Ta:-25~50°C / 0°C~60°C.
Product application: Signage lighting, Outdoor/indoor lighting, Architectural contour lighting.



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

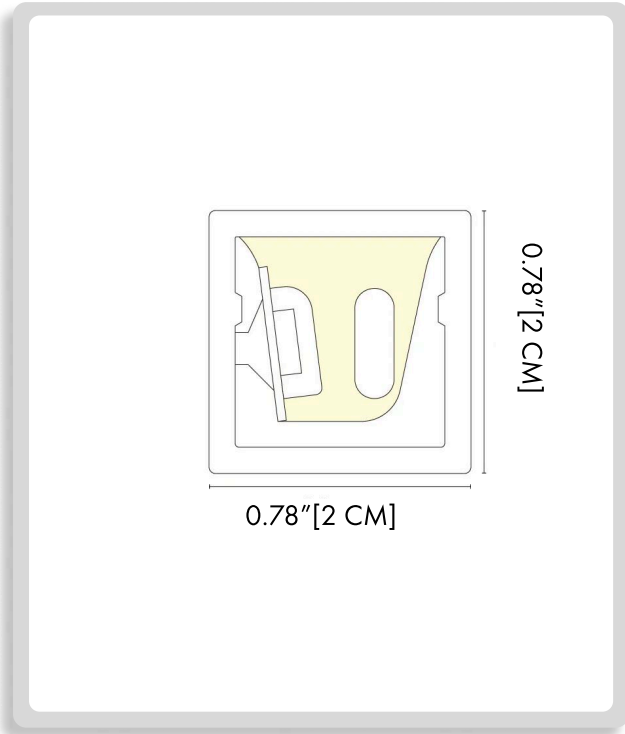

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLSM-CL-24V.3D1919.SM-27K-AS-AWS/
T2020A-30

BB-SLWLSM-
CL-24V.3D1919.SM-
27K-AS-AWS/
T2020A-30

1 DIMENSIONS:

A) Length - L: 0.78" (2 cm)
B) Height - H: 0.78" (2 cm)

2 LIGHT SOURCE:

	CCT	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER	LUMENS
-27K	2200K	>90	DC24	0.4 (0.24A/ft)	10 (3.05W/ft)	11 (3.35W/ft)	520(159LM/ft)
-30K	3000 K						560(171 LM/ft)
-40K	4000 K						630(192LM/ft)
-65K	6500 K						600(183LM/ft)

STANDARD LENGTH	REMARK
5000mm (16.4ft)	16LED/50mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLSM-CL-24V.3D1919.SM-27K-AS-AWS/
T2020A-30

BB-SLWLSM-
CL-24V.3D1919.SM-
27K-AS-AWS/
T2020A-30

3 ACCESSORIES:

AS-AWS/T2020A-30



AS-AWS/T2020A-950



AS-FC-0031




AS-JD-0001



AS-PG-0004



AS-WS-0037



CP1-GBA



CP1-GBB



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA