



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

MEGA AXIS SQ 70 SPOTLIGHT





**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-MGAXS-SQ70-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI

GENERAL INFORMATION:

The Mega Axis SQ 70 Spotlight is a robust architectural outdoor luminaire designed for precise, high-performance accent lighting in demanding environments. Featuring a compact square form and a durable construction in stainless steel and extruded aluminum, it delivers reliable illumination with excellent visual comfort and high color rendering. Adjustable swivel and wide rotation allow accurate beam aiming, while multiple beam angles and color temperatures provide flexibility for façades, landscapes, and architectural details. With IP67 protection, premium optics, and a wide range of finishes and control options, the Mega Axis SQ 70 is an ideal solution for projects that require durability, precision, and refined design.

FIXTURE TYPE:

Spot Lights

LIGHTING:

LED

GASKETS:

Silicone gaskets

APPLICATION FIELD:

Series of spot lights to be mounted on floor, wall, spike, tree with belt system or on a pole system.

VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L

Extruded aluminum EN AW-6063 T5 high resistance to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 4mm

IP RATING:

IP 67

IP67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-MGAXS-SQ70-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI

APPLINCE CLASS:

|||

DRIVER POSITION:

Remote

CRI:

>90

CONTROL GEAR TYPE:

Electronic

CABLE ENTRY:

Brass cable gland M12 Ø 3.5/7 mm

CORD LENGTH:

0.5m

SWIVEL:

+/- 90°

LIGHT DISTRIBUTION:

18° - Symmetrical medium flood (15 ° - 45 °)

38° - Symmetrical medium flood (15 ° - 45 °)

65° - Symmetrical medium flood (15 ° - 45 °)

BEAM DIRECTIONABILITY:

Adjustable

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes / Functional design

Minimal design / Shock resistant

Operating Temperature: -22°F~122°F

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-MGAXS-SQ70-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

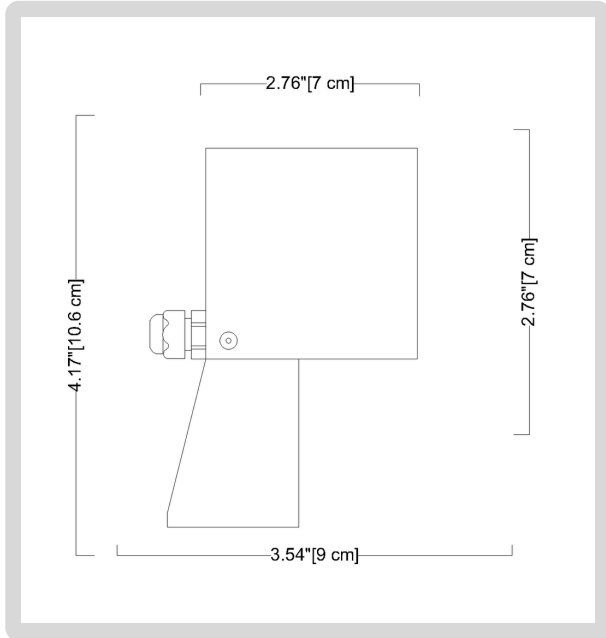

HOW TO ORDER:

CODE:

Example:

CODE: BB-MGAXS-SQ70-SP-GH-L2-B3-DIM
-02-AC204

BB-MGAXS-SQ70-
SP-GH-L2-B3-DIM
-02-AC204

1 DIMENSIONS:

- A) Width - W: 2.76" (7 cm)
B) Length - L: 2.76" (7 cm)
C) Height - H: 4.17" (10.6 cm)

2 LIGHT SOURCE:

- L1 LED / 1 x 8 W / 3000K / 740 lm
-L2 LED / 1 x 8 W / 4000K / 790 lm

3 BEAM ANGLE:

- B1 18°
-B2 38°
-B3 65°

4 DIMMING OPTIONS:

- NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

5 FINISH OPTIONS:

- | | |
|--------------------------|-----------------------|
| -01 White matt | -45 Corten matt |
| -02 Black matt | -62 Antique grey matt |
| -05 Anthracite grey matt | -65 Blue matt |
| -19 Light grey matt | -80 Sand matt |
| -26 Bronze | -83 Green matt |

6 ACCESSORIES:

- AC204 IP 68 fast connector 4P
-AC203 Stake 170mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:


CODE:

**Example:
CODE: BB-MGAXS-SQ70-SP-GH-L2-B3-DIM
-02-AC204**

BB-MGAXS-SQ70-
SP-GH-L2-B3-DIM
-02-AC204


PHOTOMETRY:

18° / 3000K




H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	1.6	62	99
4	1.3	98	155
3	1.0	173	276
2	0.6	390	621
1	0.3	1560	2484

18° / 4000K




H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	1.6	66	105
4	1.3	103	163
3	1.0	182	290
2	0.6	410	653
1	0.3	1641	2613

38° / 3000K




H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	3.4	27	45
4	2.8	43	71
3	2.1	76	125
2	1.4	170	282
1	0.7	681	1129

38° / 4000K




H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	3.4	29	48
4	2.8	45	74
3	2.1	80	132
2	1.4	179	297
1	0.7	717	1188

65° / 3000K



H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	6.3	10	21
4	5.1	16	33
3	3.8	28	58
2	2.5	64	131
1	1.3	255	524

65° / 4000K



H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	6.3	11	22
4	5.1	17	34
3	3.8	30	61
2	2.5	67	138
1	1.3	268	552

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA