



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**MINI VERTEX 100
SPOTLIGHT**





**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-MNVRTX100-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI



GENERAL INFORMATION:

The Mini Vertex 100 Spotlight is a compact, high-precision architectural LED fixture designed for refined exterior accent lighting in both landscape and façade applications. Constructed from durable die-cast aluminum with stainless steel hardware and an IP67 rating, it offers dependable performance in harsh outdoor environments. The adjustable head provides excellent aiming flexibility with 350° rotation and ±90° swivel, while multiple beam options from 24° to 58° allow tailored light control for narrow highlights or wider washes. Available in 3000K or 4000K with CRI >90, the Mini Vertex 100 delivers crisp, high-quality illumination with visual comfort. Featuring an integral driver, multiple dimming options, and a wide range of finishes and accessories, it is an ideal solution for highlighting architectural details, planting, and small-scale features with precision and elegance.

FIXTURE TYPE:

Spot Lights

LIGHTING:

LED

VOLTAGE:

110-277V



GASKETS:

Silicone gaskets

MATERIAL:

Die-cast aluminum EN AB 44100 highly resistant to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 5mm

OPTICS:

Reflector in anti-UV technopolymer with super pure aluminum metallization

IP RATING:

IP 67

IP67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-MNVRTX100-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



APPLINCE CLASS:

|||

DRIVER POSITION:

Integral

CRI:

>90

SWIVEL:

+/- 90°

ROTATION:

350°

LIGHT DISTRIBUTION:

24° - Symmetrical medium flood (15 ° - 45 °)

40° - Symmetrical medium flood (15 ° - 45 °)

58° - Symmetrical medium flood (15 ° - 45 °)

BEAM DIRECTIONABILITY:

Adjustable

CABLE ENTRY:

Brass cable gland M16 Ø 5/10 mm

CABLE TYPE :

H07RN8-F 3x1mm²

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort

Wide range of finishes

Functional design

Minimal design

Shock resistant

Operating Temperature: -22°F~122°F

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-MNVRTX100-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

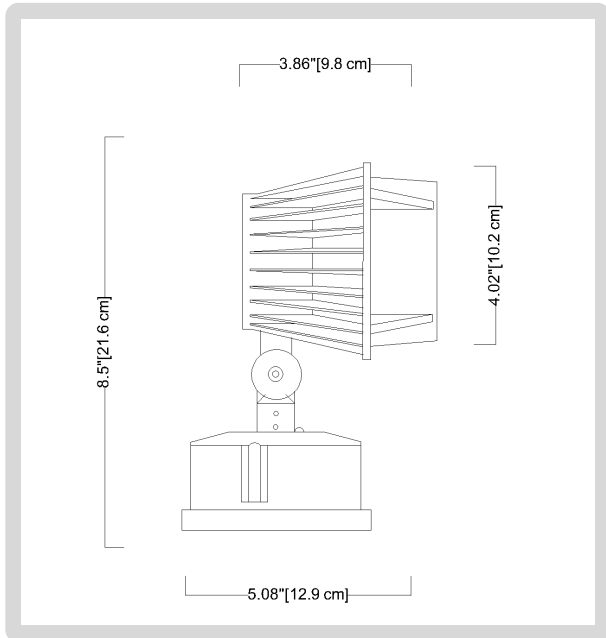

HOW TO ORDER:

CODE:

Example:
CODE: BB-MNVRTX100-SP-GH-L3-B2-DIM
-19-AC224

BB-MNVRTX100-
SP-GH-L3-B2-DIM
-19-AC224

1 DIMENSIONS:

A) Diameter - Ø: 4.02" (10.2 cm)
B) Height - H: 8.5" (21.6 cm)

2 LIGHT SOURCE:

- L1 LED / 1 x 6.3 W / 3000 K / 1 x 998 lm
- L2 LED / 1 x 11.3 W / 3000 K / 1 x 1715 lm
- L3 LED / 1 x 16.5 W / 3000 K / 1 x 2410 lm
- L4 LED / 1 x 6.3 W / 4000 K / 1 x 1073 lm
- L5 LED / 1 x 11.3 W / 4000 K / 1 x 1844 lm
- L6 LED / 1 x 16.5 W / 4000 K / 1 x 2592 lm

3 BEAM ANGLE:

- B1 24°
- B2 40°
- B3 58°

4 DIMMING OPTIONS:

- NON NON-Dimmable
- DIM 0-10V
- CAS Casambi
- DAL Dali

5 FINISH OPTIONS:

- 01 White matt
- 02 Black matt
- 05 Anthracite grey matt
- 19 Light grey matt
- 26 Bronze
- 45 Corten matt
- 62 Antique grey matt
- 65 Blue matt
- 80 Sand matt
- 83 Green matt

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-MNVRTX100-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

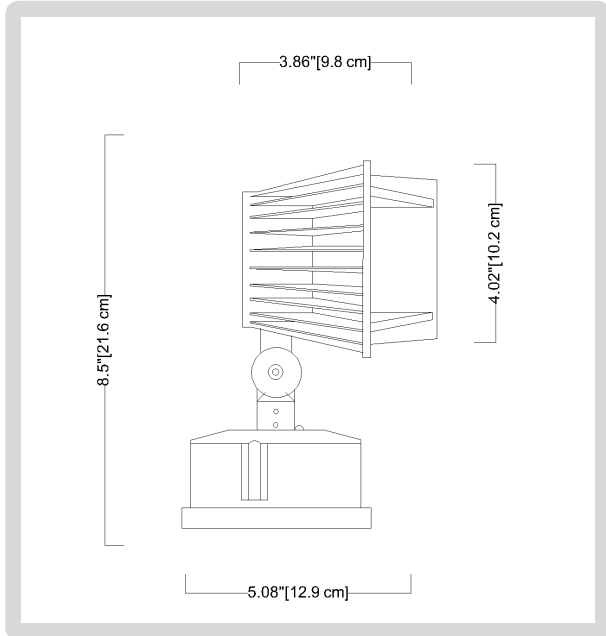

HOW TO ORDER:

CODE:

Example:
CODE: BB-MNVRTX100-SP-GH-L3-B2-DIM
-19-AC224

BB-MNVRTX100-
SP-GH-L3-B2-DIM
-19-AC224

6

ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC279

IP 68 connector for through wiring 4P



-AC224

Hood Mini VERTEX



-AC232

Microprismatic Lens Mini VERTEX




-AC226

Elipsoidal lens Mini VERTEX



-AC231

Anti glare louver Mini VERTEX



-AC642

Tree fixing strap
- Mini VERTEX



-AC257

Stake



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 05/02/2026



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-MNVRTX100-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:


CODE:

**Example:
CODE: BB-MNVRTX100-SP-GH-L3-B2-DIM
-19-AC224**

BB-MNVRTX100-
SP-GH-L3-B2-DIM
-19-AC224


PHOTOMETRY:

24° / 3000K




H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	2.1	127	199
4	1.7	198	311
3	1.2	353	554
2	0.8	793	1246
1	0.4	3173	4983

24° / 4000K

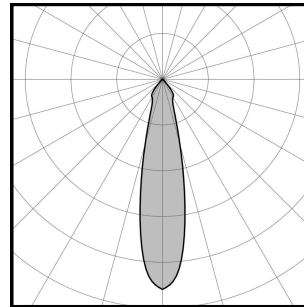


H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	2.1	181	284
4	1.7	282	443
3	1.2	502	788
2	0.8	1129	1772
1	0.4	4514	7089

40° / 3000K

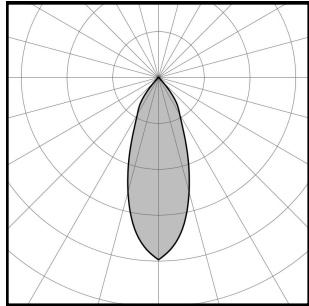


H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	3.5	57	98
4	2.8	89	154
3	2.1	159	274
2	1.4	358	616
1	0.7	1430	2462

40° / 4000K

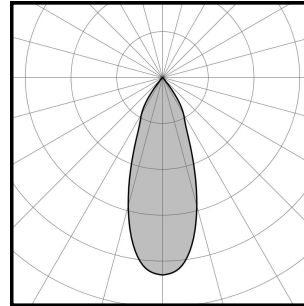


H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	3.5	81	140
4	2.8	127	219
3	2.1	226	389
2	1.4	509	876
1	0.7	2035	3503

58° / 3000K

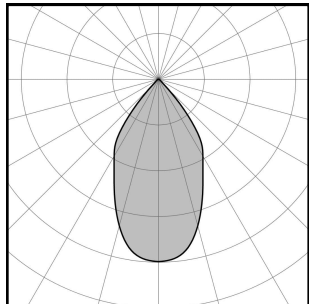

H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	5.6	32	62
4	4.5	49	97
3	3.3	88	172
2	2.2	197	386
1	1.1	788	1544

58° / 4000K

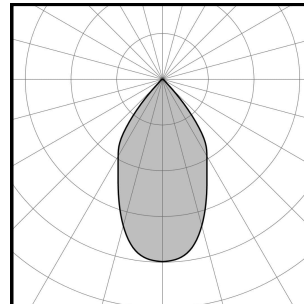

H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	5.6	45	88
4	4.5	70	137
3	3.3	125	244
2	2.2	280	549
1	1.1	1121	2197

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA