



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

# LUNARA ADJUSTABLE (CEILING RECESSED)



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



**GENERAL INFORMATION:**

The LUNARA Adjustable Collection by Bullard Bollards blends sculptural elegance with exceptional comfort, creating a striking centerpiece for contemporary interiors. Its smooth, curved silhouette is enhanced by refined metal accents and luxurious upholstery. Designed to balance aesthetics and functionality, it offers generous seating while maintaining a light, sophisticated presence. Crafted with premium materials and attention to detail, Lunara transforms everyday relaxation into a refined design experience.

**FIXTURE TYPE:**

Ceiling Recessed

**LIGHTING:**

LED

**INPUT VOLTAGE:**

110-277V

**MATERIAL:**

Extruded aluminum EN AW-6060 T5 high resistance to oxidation

**GASKETS:**

Silicone gaskets

**FINISH AND PROTECTION:**

Primary treatment with nanoceramic conversion. Secondary treatment by application of protective epoxy primer. Protective finish with textured polyester powder coating, resistant to weathering and UV rays

**CUTOUT SHAPE:**

Round

**DRIVER POSITION:**

Remote

**CRI:**

>90

**IP RATING:**

IP65

**APPLINCE CLASS:**

II / III

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



**CONTROL:**

Dim based on driver

**CABLE ENTRY:**

Brass cable gland M12 Ø 0.35/0.7 cm

**CABLE TYPE:**

FR5FOEM7-AD8 2x0.005cm2

**CORD LENGTH:**

50cm

**BEAM ANGLE / LIGHT DISTRIBUTION / BEAM DIRECTIONABILITY:**

<b>-45</b>	20° / 31°	Symmetrical medium flood (15° - 45°)	Adjustable
<b>-55</b>	13°	Symmetrical narrow beam (<=15°)	Adjustable
	25°	Symmetrical medium flood (15° - 45°)	Fixed optics
	46°	Symmetrical wide beam (45° - 125°)	Adjustable
<b>-65</b>	14°	Symmetrical narrow beam (<=15°)	Adjustable
	25°	Symmetrical medium flood (15° - 45°)	Adjustable
	36°	Symmetrical medium flood (15° - 45°)	Adjustable
	55°	Symmetrical wide beam (45° - 125°)	Adjustable

**SWIVEL / ROTATION:**

+/- 15° / +/- 360°

**OPTICS:**

Anti UV technopolymer lens

**WARRANTY:**

LED lighting products are warranted for 5 years.

**MAIN FEATURES:**

- High visual comfort
- Wide range of finishes
- Functional design
- Minimal design
- Reduced overhang
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- \* upon request previous specific components and test

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

**HOW TO ORDER:**

**CODE:**

**Example:**  
**CODE: BB-2054.00BAST-GH-45-L1-B1-24V-DIM-02-AC205-IP66**

BB-2054.00BAST-GH  
45-L1-B1-24V-DIM-02  
AC205-IP66

**1 MODELS:**

**-45**

DIMENSIONS:

Diameter - Ø: 1.77" (4.5 cm)

Recessed hole diameter - Ø: 1.61" (4.1 cm)

LIGHT SOURCE:

**-L1** LED / 1 x 1.5 W / 3000K / 146 lm

**-L2** LED / 1 x 1.5 W / 4000K / 162 lm

BEAM ANGLE:

**-B1** 20°

**-B2** 31°

CONTROL GEAR/OPERATION RANGE:

**-24V** 24 V DC

**-500** 500 mA

**-55**

DIMENSIONS:

Diameter - Ø: 2.17" (5.5 cm)

Recessed hole diameter - Ø: 2.01" (5.1 cm)

LIGHT SOURCE:

**CODE** | **BEAM ANGLE** | **WATTAGE** | **KELVINS** | **LUMENS**

**-B13-1** 13° | 1 x 2.1W | 2700 K | 1 x 185 lm | 700 mA

**-B13-2** | 1 x 2.1W | 3000 K | 1 x 196 lm | 700 mA

**-B13-3** | 1 x 2.1W | 4000 K | 1 x 218 lm | 700 mA

**-B13-4** | 1 x 2.1W | 4000 K | 1 x 218 lm | 24 V DC

**-B25-1** 25° | 1 x 2.1W | 3000 K | 1 x 196 lm | 700 mA

**-B25-2** | 1 x 2.1W | 3000 K | 1 x 196 lm | 24 V DC

**-B25-3** | 1 x 2.1W | 4000 K | 1 x 218 lm | 700 mA


**-B25-4** | 1 x 2.1W | 4000 K | 1 x 218 lm | 24 V DC

**-B46-1** 46° | 1 x 2.1W | 3000 K | 1 x 196 lm | 700 mA

**-B46-2** | 1 x 2.1W | 3000 K | 1 x 196 lm | 24 V DC

**-B46-3** | 1 x 2.1W | 4000 K | 1 x 218 lm | 700 mA

**-B46-4** | 1 x 2.1W | 4000 K | 1 x 218 lm | 24 V DC

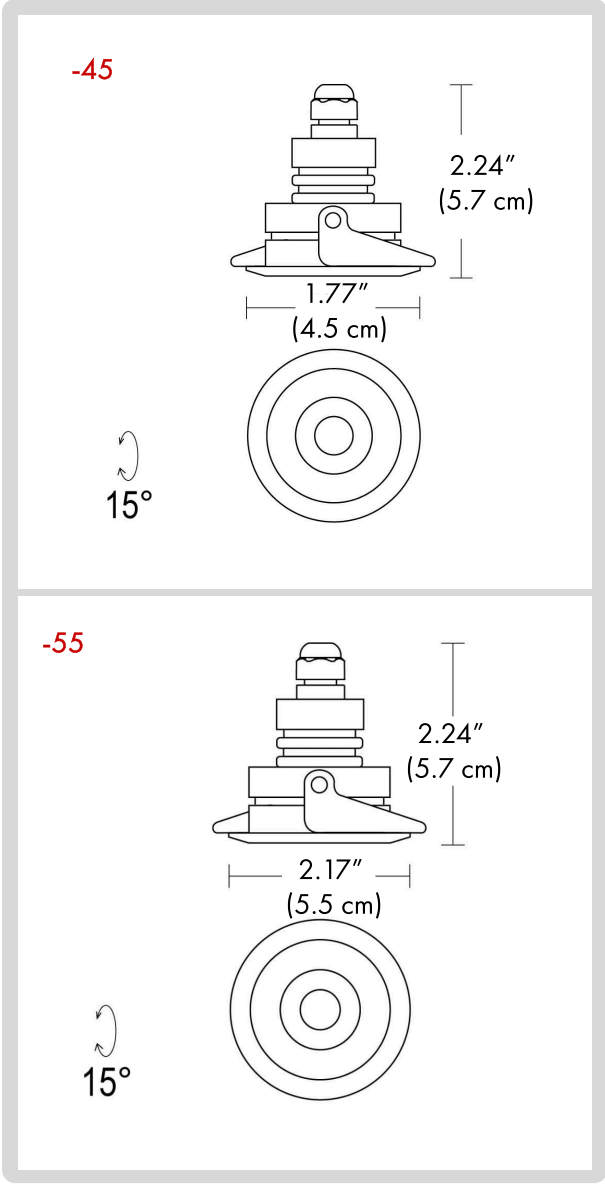

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

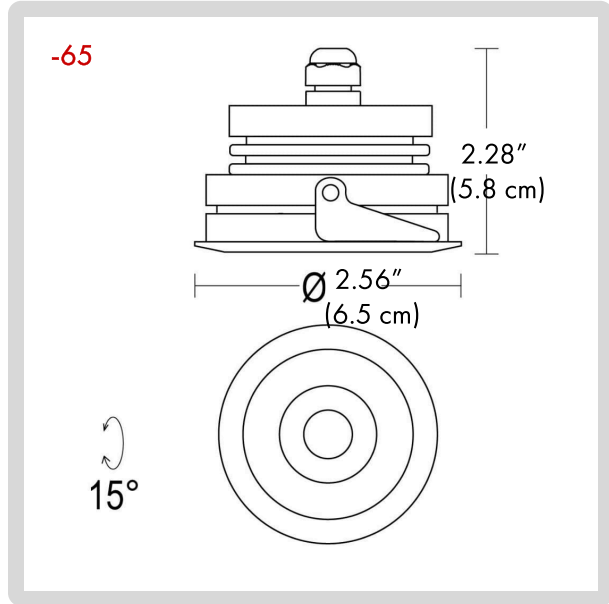

**HOW TO ORDER:**

**CODE:**

**Example:**  
CODE: BB-2054.00BAST-GH-45-L1-B1-24V-DIM-02-AC205-IP66

BB-2054.00BAST-GH-45-L1-B1-24V-DIM-02-AC205-IP66

**1 MODELS:**

**-65**

**DIMENSIONS:**

Diameter - Ø: 2.56" (6.5 cm)  
Recessed hole diameter - Ø: 2.40" (6.1 cm)

**LIGHT SOURCE:**

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	
<b>-B14-1</b>	14°	1 x 3.2W	3000 K	1 x 277 lm	1050 mA
<b>-B14-2</b>		1 x 3.2W	4000 K	1 x 307 lm	1050 mA
<b>-B25-1</b>	25°	1 x 3.2W	3000 K	1 x 277 lm	1050 mA
<b>-B25-2</b>		1 x 6.0W	3000 K	1 x 845 lm	350 mA
<b>-B25-3</b>		1 x 6.0W	3000 K	1 x 845 lm	24 V DC
<b>-B25-4</b>		1 x 3.2W	4000 K	1 x 307 lm	1050 mA
<b>-B25-5</b>		1 x 6.0W	4000 K	1 x 877 lm	350 mA
<b>-B25-5</b>		1 x 6.0W	4000 K	1 x 877 lm	24 V DC
<b>-B36-1</b>	36°	1 x 3.2W	3000 K	1 x 277 lm	1050 mA
<b>-B36-2</b>		1 x 3.2W	4000 K	1 x 307 lm	1050 mA
<b>-B55-1</b>	55°	1 x 6.0W	3000 K	1 x 845 lm	350 mA
<b>-B55-2</b>		1 x 6.0W	3000 K	1 x 845 lm	24 V DC
<b>-B55-3</b>		1 x 6.0W	4000 K	1 x 877 lm	350 mA
<b>-B55-4</b>		1 x 6.0W	4000 K	1 x 877 lm	24 V DC

**2 DIMMING OPTIONS:**

- NON** NON-Dimmable
- DIM** 0-10V
- CAS** Casambi
- DAL** Dali

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



**HOW TO ORDER:**

**CODE:**

**Example:**  
CODE: BB-2054.00BAST-GH-45-L1-B1-24V-DIM-02-AC205-IP66

BB-2054.00BAST-GH-45-L1-B1-24V-DIM-02-AC205-IP66

**3 FINISH OPTIONS:**

- 01 White matt
- 02 Black matt
- 05 Anthracite grey matt
- 19 Light grey matt
- 26 Bronze
- 45 Corten matt
- 62 Antique grey matt
- 65 Blue matt
- 80 Sand matt
- 83 Green matt

**4 ACCESSORIES:**

For model 45:

**-AC205-IP66**

IP66 remote power supply box



For model 55:

**-AC204**

IP 68 fast connector 4P



For model 65:

**-AC205-IP66**

IP66 remote power supply box



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA