


## Soffione P3



IP 65

IK 07

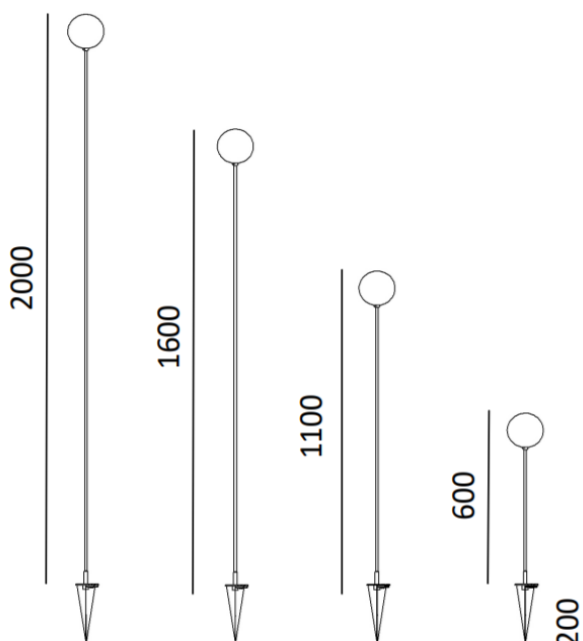

### MODEL:

Code	SOP3AH1 - 600 mm/ 200 mm spike SOP3AH2 - 1100 mm/ 200 mm spike SOP3AH3 - 1600 mm/ 200 mm spike SOP3AH4 - 2000 mm/ 200 mm spike
Product family	Outdoor Lighting


### TECHNICAL DETAILS:

Installation	into the ground with the supplied spike
Class	III
Power	1,6 W
Luminous flux	200 lm
LED color	3000K
Optics	360°
Resistance to breakage	IK 07
Protection degree	IP 65
Weight	1,5-2-2,5-3 kg
Electric connection	12 V
Material	stainless steel
Driver	not included
Cables	wired with 3 mt
Diffuser	Frosted glass diffuser

### PRODUCT'S DESCRIPTION:

Wired with external cable L= 3 mt.  
Fixing to the ground with the spike included.  
4 heights : 60, 110, 160 e 200 cm.  
Remote driver not included.

### COLORS:

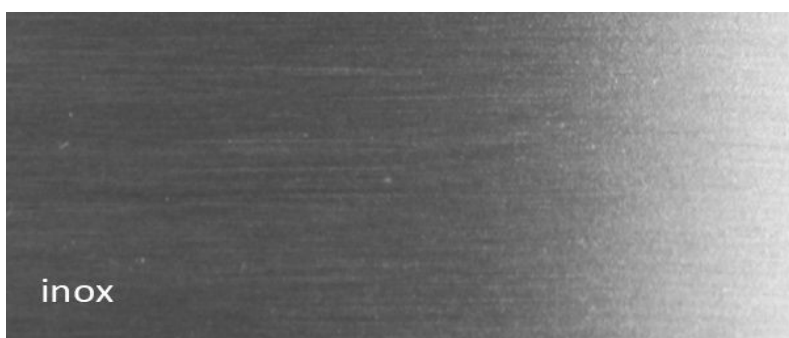

inox




browntech

.IN

Inox

.BR

Browntech




## Soffione P3 Colorful



IP 65

IK 07

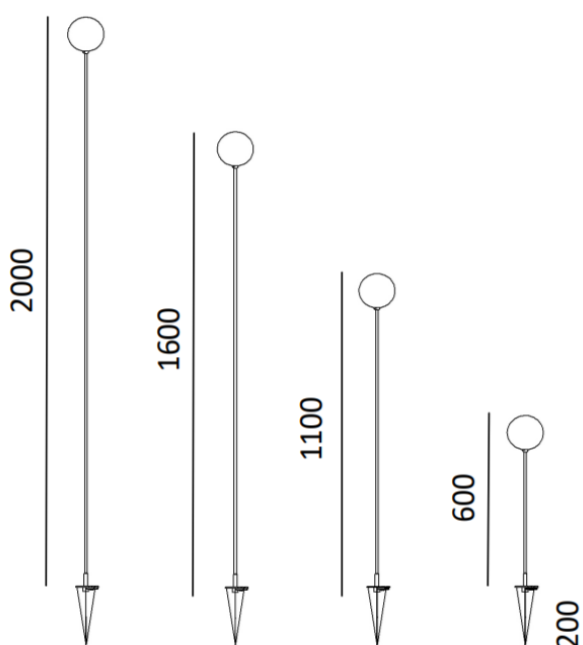

### MODEL:

Code	SOP3BH1 - 600 mm/ 200 mm spike SOP3BH2 - 1100 mm/ 200 mm spike SOP3BH3 - 1600 mm/ 200 mm spike SOP3BH4 - 2000 mm/ 200 mm spike
Product family	Outdoor Lighting


### TECHNICAL DETAILS:

Installation	into the ground with the supplied spike
Class	III
Power	1,6 W
Luminous flux	200 lm
LED color	3000K
Optics	360°
Resistance to breakage	IK 07
Protection degree	IP 65
Weight	1,5-2-2,5-3 kg
Electric connection	12 V
Material	stainless steel
Driver	not included
Cables	wired with 3 mt
Diffuser	Colored glass diffuser
Diffuser colors :	Amber, Green and Fumé

### PRODUCT'S DESCRIPTION:

Wired with external cable L= 3 mt.  
Fixing to the ground with the spike included.  
4 heights : 60, 110, 160 e 200 cm.  
Remote driver not included.

### COLORS:

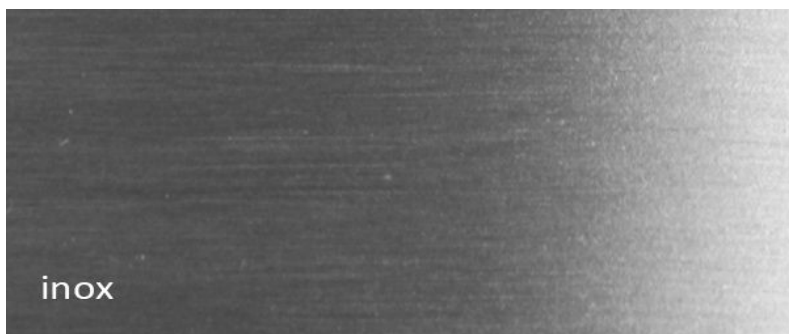

inox



browntech

.IN

Inox

.BR

Browntech