



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

BUNNY PURE 4L 45 (INGROUND LUMINAIRES)



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



GENERAL INFORMATION:

The Bunny Pure 4L 45 by Bullard Bollards is a precision-crafted recessed ground grazer that quietly delineates outdoor paths with a controlled beam while staying almost invisible in the terrain. Its marine-grade stainless steel body and UV-resistant diffuser are sealed and paired with the water-lock system to fend off moisture and harsh environments year after year. Designed for walk-over durability with a shallow recess, it blends minimalist form with architectural intent to elevate any landscape without stealing focus. This luminaire turns practical circulation areas into thoughtfully lit spaces that feel intentional and refined.

FIXTURE TYPE:

Inground Luminaires

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

MATERIAL:

Stainless steel AISI 316L
Extruded aluminum EN AW-6060 T5 high resistance to oxidation

GASKETS:

Silicone gaskets

ROUGH IN HOUSING:

Thermoplastic to be ordered separately

DRAINAGE:

20.0cm of gravel or draining material. Alternatively, draining piping system.

STATIC LOAD:


1102.31 lb WalkOver

CRI:

>80

DRIVER POSITION:

Remote

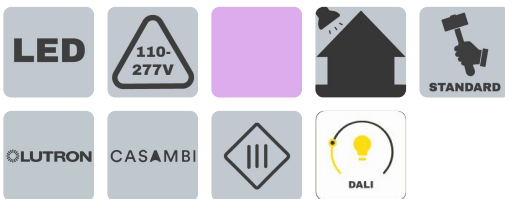

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

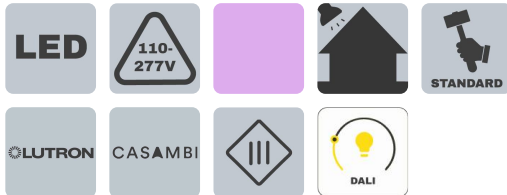

IP RATING:

IP68

APPLINCE CLASS:

III

CUTOUT SHAPE:

Round

CABLE ENTRY:

Nylon cable gland M12 Ø 0.35/0.7 cm

CABLE TYPE:

FR5FOEM7-AD8 2x0.005cm2

WATER-LOCK SYSTEM:

Cable gland with anti-moisture suction system, preventing the capillary rise of water or condensation along the cable and ensuring maximum protection of the luminaire body and electrical components

CORD LENGTH:

50 cm

LIGHT DISTRIBUTION:

55° x 30° Other

BEAM DIRECTIONABILITY:

Fixed optics

DIFFUSER MATERIAL/TEMPERATURE:

Technopolymer / < 313.15 K (< 40 °C)

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- Wide range of finishes
- Evocative / Functional design
- Resistant to vandalism
- Reduced depth of recess
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- * upon request previous specific components and test

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

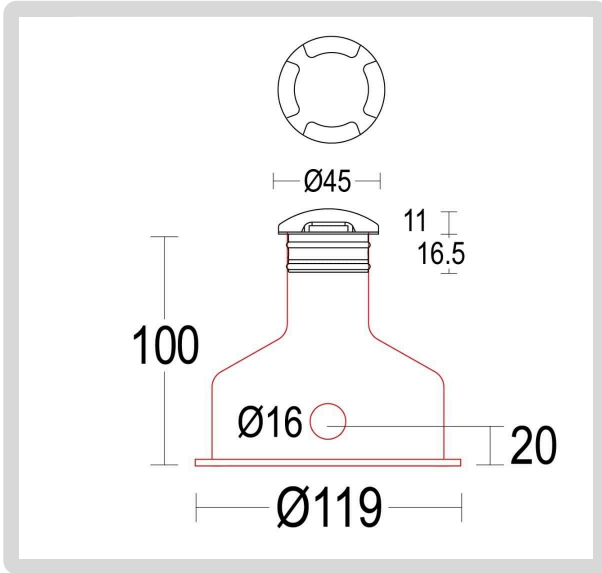

HOW TO ORDER:

CODE:

Example:
CODE: BB-1381.00BAXO-GH-K30-24V-DIM
-15-AC204-AC611

BB-1381.00BAXO-GH
-K30-24V-DIM
-15-AC204-AC611

1 DIMENSIONS:

Diameter - Ø: 1.77" (4.5 cm)
Height - H: 0.43" (1.1 cm)
Recessed hole diameter - Ø: 1.42" (3.6 cm)
Recessed depth - h: 1.30" (3.3 cm)

2 BEAM ANGLE:

55° x 30°

3 LIGHT SOURCE:

LED / 1 x 1.5 W

4 CCT&LUMENS:

-K30 3000K = 170 lm
-K40 4000K = 180 lm

5 CONTROL GEAR / OPERATION RANGE:


-24V 24 V DC
-500 500 mA

6 DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-LT Lutron
-DAL Dali

7 FINISH OPTIONS:

-15 Stainless steel
-Cus* Custom on request

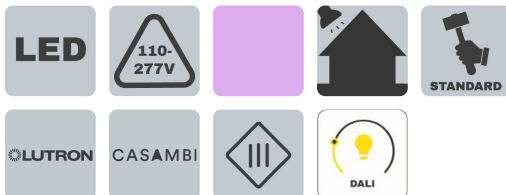

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

**Example:
CODE: BB-1381.00BAXO-GH-K30-24V-DIM
-15-AC204-AC611**

BB-1381.00BAXO
-GH-K30-24V-DIM
-15-AC204-AC611

8 ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC296

Wall recessed rough-in housing 503



-AC611

Rough-in housing 40x105



9 PHOTOMETRY:



55° x 30° / 3000K

H(m)	φ (m)	lux med. lux max.	
		4000 K	4000 K
5	5.1	0	0
4	4.1	0	1
3	3.1	1	1
2	2.1	1	3
1	1.0	6	10



55° x 30° / 4000K



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA