





**BULLARD
BOLLARDS**
Think Bollard Think Bullard


VERTA
Recessed Wall Luminaires
Stair / Pathway

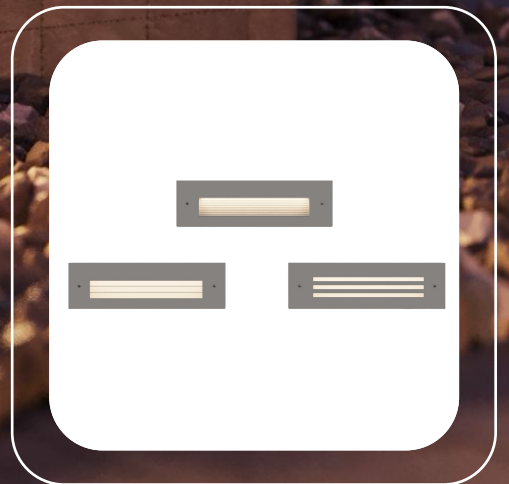

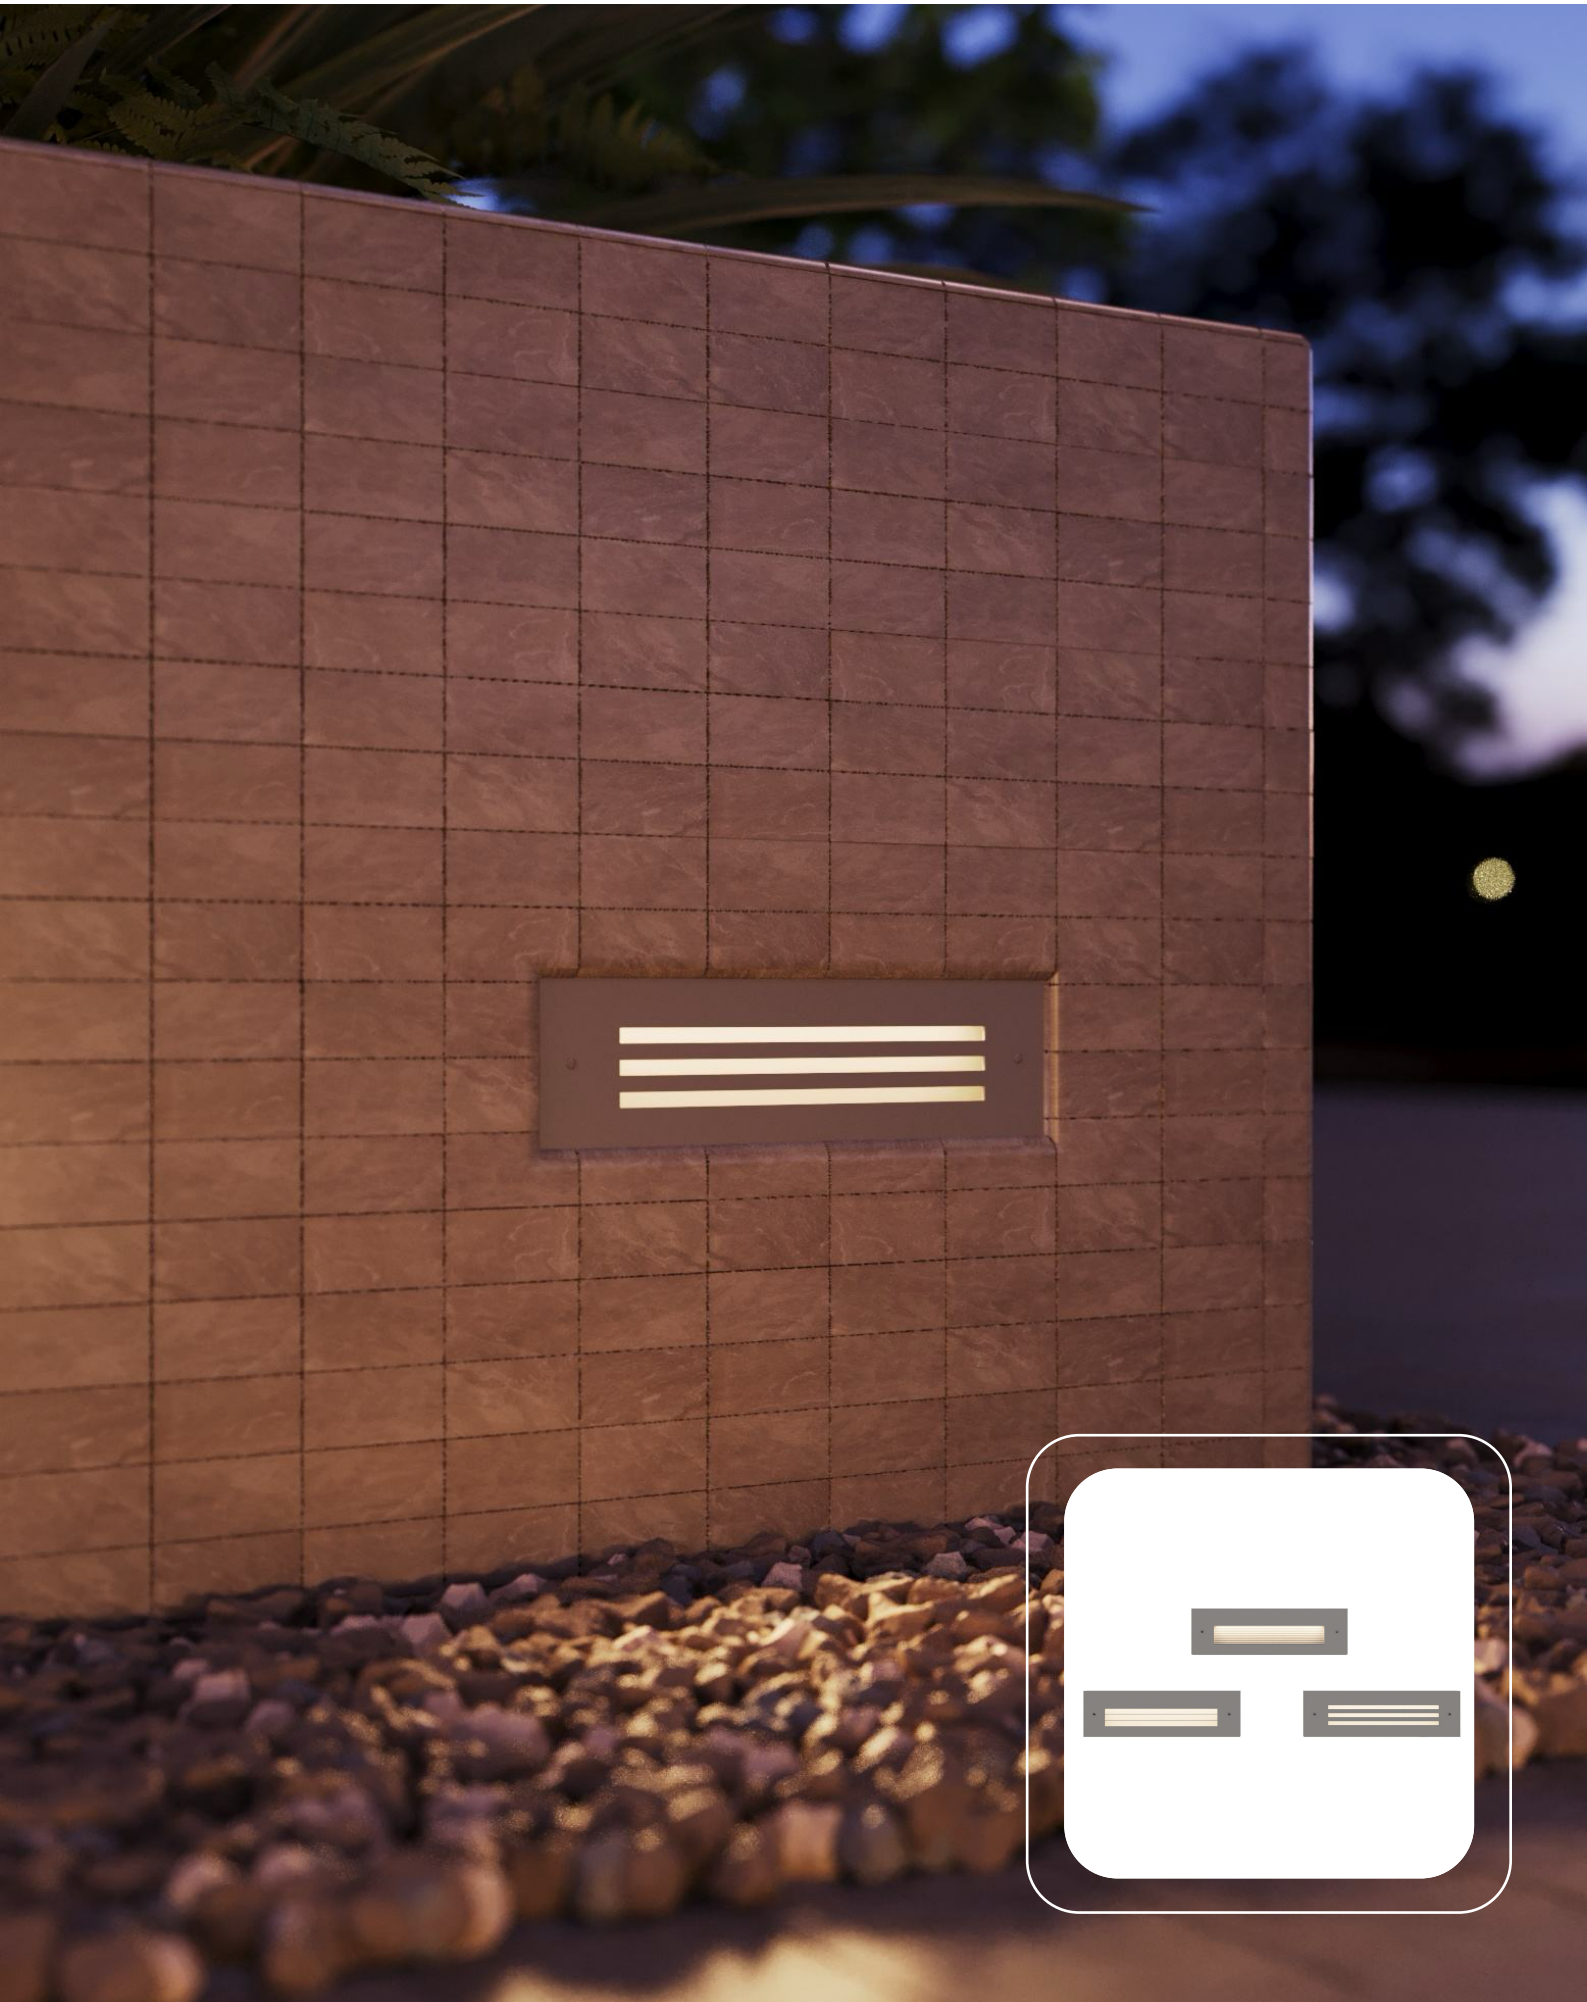

FIXTURE TYPE: _____

PROJECT NAME: _____

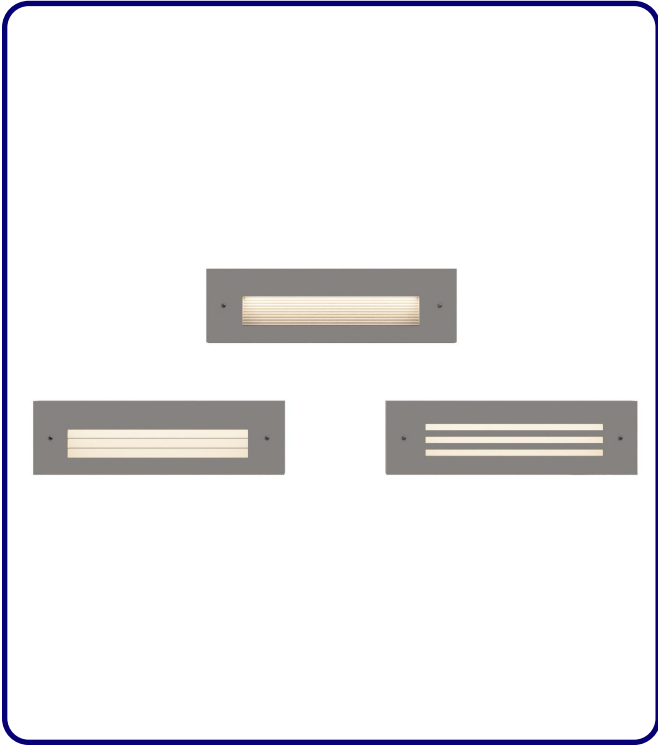

*CABLE GLAND - IP68 PG-9 PA66

GENERAL INFORMATION:

The VERTA Recessed Wall Luminaire is a durable LED fixture for stairways and pathways. Made from die-cast powder-coated aluminum with optional stainless steel covers, it features a UV-stable, fireproof lens for reliable performance. Operating on 110–277V with a CRI of 80, VERTA is IP65 and IK09/IK10 rated, ensuring durability and style in Sanded Dark Gray, Sanded Black, or Gunstock Brown Light finishes.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway Luminaires

LIGHTING:

LED

LED

VOLTAGE:

110-277V



MATERIAL:

12# Die-casting powder coated aluminum

COVER:

D1BA1517A, D1BB4232: 12# Die-casting aluminum

D1BC4232: Made by hard chrome-plated stainless steel 316L#

LENS:

D1BC4232, D1BB4232: UVstop & Fireproof PC T=3mm:

D1BA1517A: UVstop & Fireproof PC T=1.5mm:

RECESSED SLEEVE:

PC/ABS ALLOYS 074#

IP RATING:

IP 65

IP65

IK RATING:

IK 9 / IK 10

FINISHING:

Sanded Dark Gray

Sanded Black

Sanded Silver Gray

Gunstock Brown Light (only for D1BC4232 model)

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

-D1BA1517A

-D1BB4232

-D1BC4232

HOW TO ORDER:

CODE:

Example:
 CODE: BB-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BB-VRT-KPG-RWL-
 D1BA1517A-K30-
 KAP7037-DIM

1 MODELS:

CODE -D1BA1517A

DIMENSIONS:

Length - L: 10" (25.5 cm)
 Height - H: 3" (7.5 cm)
 Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 15 x 0.2W / 200 mA / 113 lm / 110-277V / IK 10

CODE -D1BB4232

DIMENSIONS:

Length - L: 10" (25.5 cm)
 Height - H: 3" (7.5 cm)
 Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 42 x 0.09W / 200 mA / 47 lm / 110-277V / IK 10

CODE -D1BC4232

DIMENSIONS:

Length - L: 10" (25.5 cm)
 Height - H: 3" (7.5 cm)
 Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 42 x 0.09W / 220 mA / 150 lm / 110-277V / IK 09

2 CCT OPTIONS:

-K30 3000K
 -CUS Custom on request*

3 FINISH OPTIONS:

-KAP7037 Sanded Dark Gray
 -RAL 9005 Sanded Black
 -KAP 9022 Sanded Silver Gray
 -KAP 03 Gunstock Brown Light (only for D1BC4232 model)

sales@gordonbullard.com
 www.bullardbollards.com
 1-877-964-4646




991 South Gull Lake Dr
 Richland, MI 49083
 USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

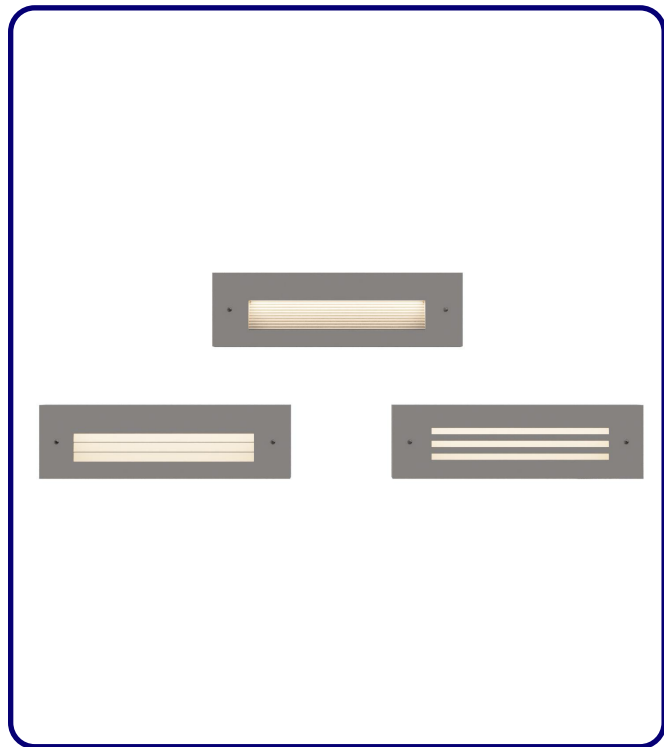

HOW TO ORDER:

CODE:


Example:
CODE: BB-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BB-VRT-KPG-RWL-
D1BA1517A-K30-
KAP7037-DIM


4 DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)


5 MOUNTING SLEEVE CHARACTERISTIC:

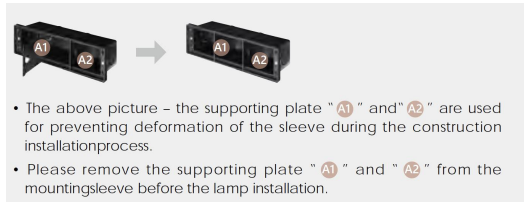


6 RECESSED SLEEVE: (included)

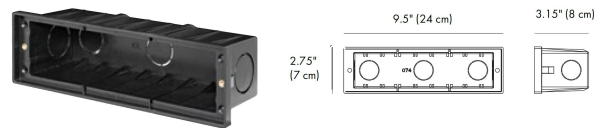

7 DIAGRAM OF INSTRUCTION:

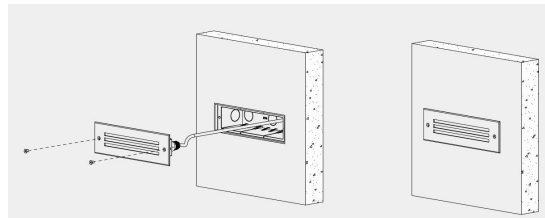

8 PHOTOMETRIC INFO:

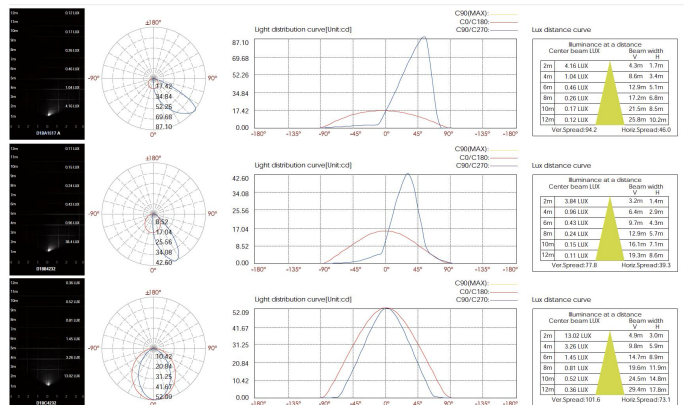

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA