


CODE: BO-D1FA2034-WL

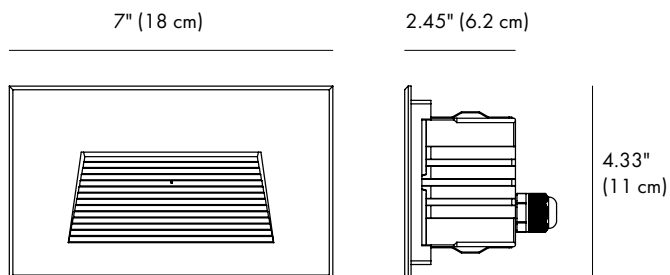

LIGHT SOURCE:

20 × 0.2W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

57 mA

CONSUMPTION:

6.8W

LUMINANCE:

CW=131 | WW=107

IK:

10

FRONT COVER

12# Die-casting aluminum powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

HOUSING

12# Die-casting AL9005 powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

LIGHT WINDOW

UVstop & Fireproof PC

CABLE GLAND

IP67 copper and nicked coated

GASKET

Molding shaped silicone seal

RECESSED SLEEVE

PC/ABS ALLOYS **091#**

LED DRIVER

Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE

-20°C~40°C

POWER CABLE

Outside of luminaire
H05RN-F 3×1.0mm², L=0.5m (110-277V)

LED

SMD3030

IP

IP65


DIMMING SUPPORT

Triac PWM Available
1-10V Dali Customized

REGULAR PAINTING COLOR

Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

RECESSED SLEEVE (Included)



091#




sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

DIAGRAM OF INSTRUCTION

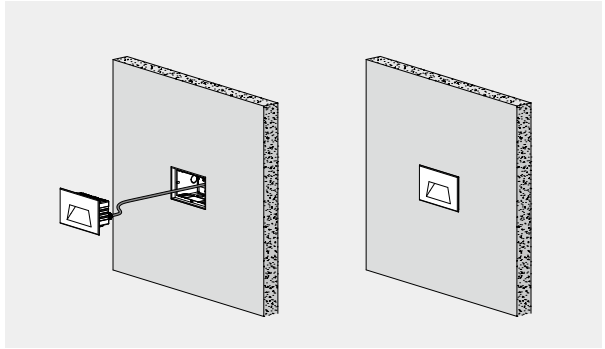

FEATURES






- Front cover without screws



- Use the high-strength clips for installation and fixation. (please refer remark 1 & 2)

PHOTOMETRIC

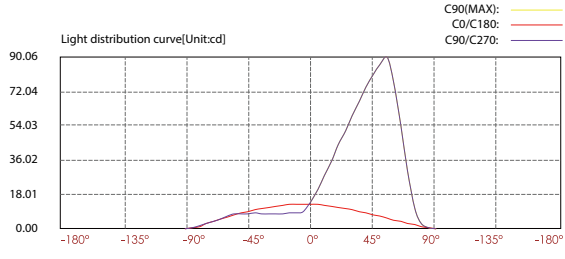

Lux distance cure

Center beam LUX	Beam width V	H
2m	3.25 LUX	1.70m 3.60m
4m	0.81 LUX	3.40m 7.20m
6m	0.36 LUX	5.10m 10.8m
8m	0.20 LUX	6.80m 14.4m
10m	0.13 LUX	8.50m 18.0m
12m	0.09 LUX	10.2m 21.6m

Ver.Spread:46.2 Horiz.Spread:84.0

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

SPARK

HOW TO ORDER:

CODE:

EXAMPLE:




BO-D1FA2034-WL-BKAP 7037

BO-D1FA2034-
WL-BKAP 7037

1. CHOOSE FIXTURE SIZE:

BO-D1FA2034-WL

2. BODY FINISH OPTIONS:

-  **-BKAP 7037** Dark Grey
-  **-RAL 9023** Silver Grey
-  **-RAL 9005** Sanded Black

