



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

SLICK WILLY FACADE LINE
BB-SLWLFL-CL





FIXTURE TYPE: _____

PROJECT NAME: _____

-24V.3D1515.LTE



GENERAL INFORMATION:

Engineered for architectural excellence, this high-performance silicone neon LED delivers refined, shadow-free illumination with exceptional durability across demanding environments. Featuring a high-efficiency light source (LM80 certified) and a precision optical distribution design, it ensures perfectly uniform light with no visible dots or shadows; pure, continuous elegance. Crafted using an advanced three-color silicone extrusion process, the strip offers superior flexibility, clean cutting accuracy, and a sleek, dust-resistant finish. Compared to traditional PVC solutions, its premium silicone body provides enhanced resilience and a more sophisticated aesthetic. Built to endure, it resists UV exposure, corrosion, saline environments, acids, and alkalis, making it ideal for both indoor and outdoor architectural applications.

FIXTURE TYPE:

Arch LED Neon

MATERIAL:

Three-color silicone extrusion process

IP RATING:

IP67



IK RATING:

IK08



WARRANTY:

5 year warranty, high reliability

DRIVER POSITION:

Remote

MAIN FEATURES:

Light source: High luminous efficiency, LM80 proved.
Optical Design: Unique optical light distribution structure design.
Product Certification: UL, CE, ROHS, UKCA, CB
Working/Storage Temperature: Ta:-25~50°C / 0°C~60°C.
Product application: Signage lighting, Outdoor/indoor lighting, Architectural contour lighting.



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

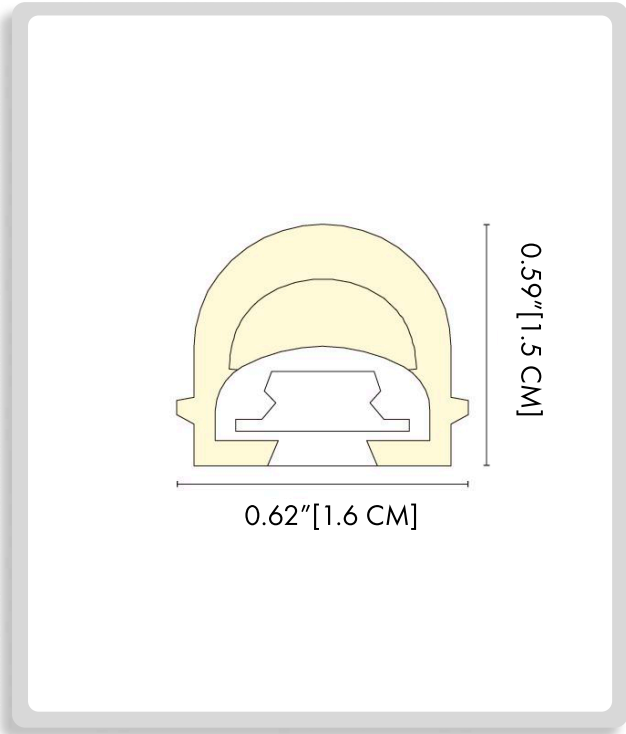

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLFL-CL-24V.3D1515.LTE-22K9-ASTE-0001

BB-SLWLFL-CL-24V.3D1515.LTE-22K9-ASTE-0001

1 DIMENSIONS:

A) Length - L: 0.62" (1.6 cm)
B) Height - H: 0.59" (1.5 cm)

2 LIGHT SOURCE:

	CCT	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER	LUMENS
-22K9	2200K	>90	24	0.4 (0.12A/ft)	9.6 (2.93W/ft)	10.6 (3.23W/ft)	680(207/ft)
-27K9	2700 K						780(237/ft)
-30K9	3000 K						820(250/ft)
-45K9	4500 K						810(246/ft)
-RGB9	RGB	/	24	0.5 (0.15A/ft)	12 (3.66W/ft)	13.2 (4.02W/ft)	/

STANDARD LENGTH	REMARK
10000mm (32.8ft)	7LED/50mm
5000mm (16.4ft) <i>only for RGB</i>	6LED/50mm(<i>only for RGB</i>)

	CCT	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER	LUMENS
-22K8	2200K	>80	24	0.75 (0.23A/ft)	18 (5.48W/ft)	20.7 (6.31W/ft)	1010(307/ft)
-30K8	3000 K						1350(411/ft)
-35K8	3500 K						1280(390/ft)
-45K8	4500 K						1210(368/ft)
-RGB8	RGB	/	24	0.75 (0.23A/ft)	18 (5.48W/ft)	20.7 (6.31W/ft)	/

STANDARD LENGTH	REMARK
5000mm (16.4ft)	7LED/83.3mm (IC:UCS512B3L) 12Pixels/m

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLFL-CL-24V.3D1515.LTE-22K9-ASTE-0001

BB-SLWLFL-
CL-24V.3D1515.LTE-
22K9-ASTE-0001

3 ACCESSORIES:

ASTE-0001



ASTE-WS-0012



ASTE-NNT1615A



CP3TE-GBA



ASTE-NNT1615A-25



CR3TE-GBA



ASTE-NNT1615GH0-EC



ASTE-NNT1615P-1000




ASTE-NNT1615P-25



ASTE-PG-0002



ASTE-WS-0012



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA