

FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

BUNNY HOP is a versatile recessed lighting series for façades, trees, shrubs, columns, and architectural accents. Available in various sizes, optics, and wattages, it provides precise and durable illumination for landscape and architectural use. The high-resistance aluminum body with nano-bonderite treatment and textured powder coating ensures long-term protection against UV and weather conditions. Silicone gaskets and an ultra-clear tempered glass diffuser guarantee optimal sealing and maximum light output, complemented by stainless-steel trim and hardware. A water-lock system prevents cable condensation, and a polypropylene rough-in housing allows safe ground installation. Suitable for low-speed drive-over areas (max 10 km/h); not for pools or fountains.

FIXTURE TYPE:

Inground

VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation

IP RATING:

IP 68



DIFFUSER:

Tempered glass (8mm for 90 models and 15mm for 135/245 models)

WARRANTY:

LED lighting products are warranted for 5 years.

DRIVER POSITION:

Remote

MAIN FEATURES:

- High visual comfort
- Available in a wide choice of optics
- Functional and minimalistic design
- Shock-resistant construction
- Operating Temperature: -4°F to +122°F.

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-700.00HPBN300EN-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____


HOW TO ORDER:

CODE:

Example:
CODE: BB-700.00HPBN300EN-GH-136-SQ-B17-1-DAL-SS

BB-700.00HPBN300EN-GH-136-SQ-B17-1-DAL-SS

1 MODELS:

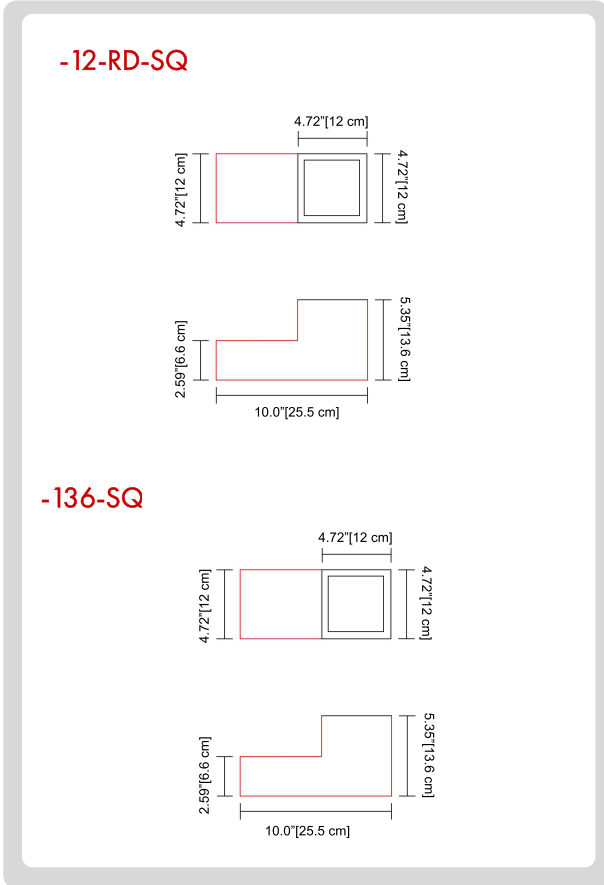

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	OPERATION RANGE
-B19-1	19° x 32°	1 x 9.5W	3000 K	1 x 944 lm	110-277 V
-B19-2		1 x 9.5W	4000 K	1 x 1047 lm	
-B19-3		1 x 13.5W	4000 K	1 x 1455 lm	110-277 V
-B19-4		1 x 13.5W	3000 K	1 x 1312 lm	
-B19-5		1 x 19W	3000 K	1 x 1768 lm	110-277 V
-B19-6		1 x 19W	4000 K	1 x 1962 lm	

LIGHT SOURCE: -12-RD-SQ

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	OPERATION RANGE
-B17-1	17°	1 x 16.5W	3000 K	1 x 2410 lm	110-277 V
-B17-2		1 x 16.5W	4000 K	1 x 2592 lm	
-B17-3		1 x 23.7W	4000 K	1 x 3555 lm	110-277 V
-B17-4		1 x 23.7W	3000 K	1 x 3306 lm	
-B37-1	37°	1 x 16.5W	3000 K	1 x 2410 lm	110-277 V
-B37-2		1 x 16.5W	4000 K	1 x 2592 lm	
-B37-3		1 x 23.7W	4000 K	1 x 3555 lm	110-277 V
-B37-4		1 x 23.7W	3000 K	1 x 3306 lm	
-B50-1	50°	1 x 11.3W	3000 K	1 x 1715 lm	110-277 V
-B50-2		1 x 16.5W	4000 K	1 x 2592 lm	
-B50-3		1 x 23.7W	3000 K	1 x 3306 lm	110-277 V
-B50-4		1 x 23.7W	4000 K	1 x 3555 lm	



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-700.00HPBN300EN-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

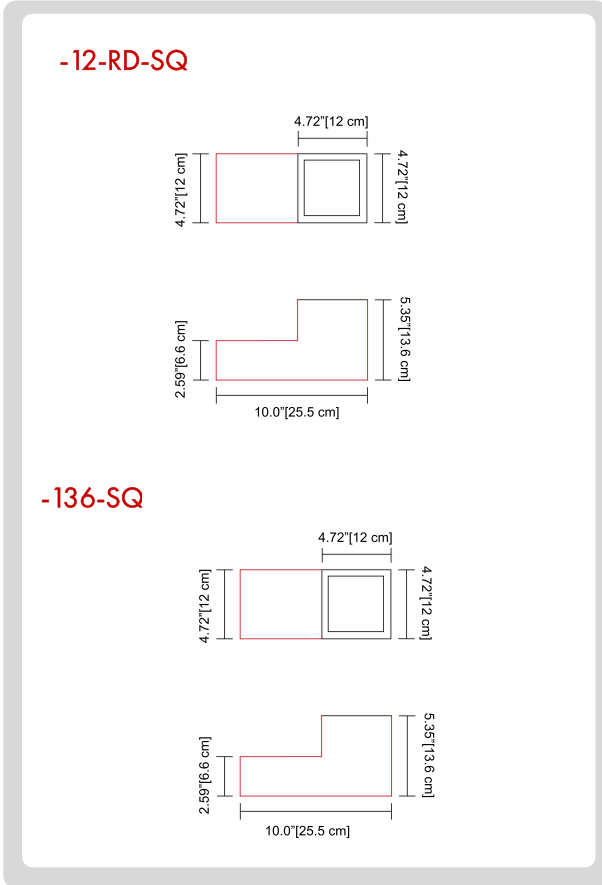

HOW TO ORDER:

CODE:




Example:
CODE: BB-700.00HPBN300EN-GH-136-SQ-B17-1-DAL-SS

BB-700.00HPBN300EN-GH-136-SQ-B17-1-DAL-SS

2 DIMMING OPTIONS:

- NON NON-Dimmable
- DIM 0-10V
- DAL Dali

3 FINISH OPTIONS:

- SS Stainless Steel 
- NB Natural Bronze 
- CUS Custom on request* 

4 ACCESSORIES:

-AC034

Well Edge SQ Inox 

-AC204

IP 68 fast connector 4P 

-AC204-P

IP 68 fast connector 5P 

-AC279

IP 68 connector for wiring 4P 

-AC279-P

IP 68 connector for wiring 5P 



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA