



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

## MAXI BUNNY LINE 1200 (INGROUND LUMINAIRES)





**BULLARD  
BOLLARDS**  
Think Bullard Think Bullard



**CODE:**

**BB-001548.FLMTTUNEL-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

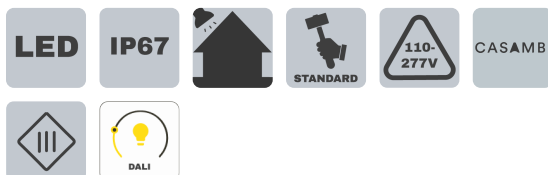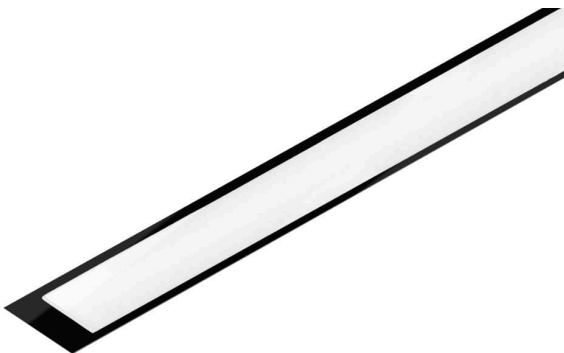

## GENERAL INFORMATION:

The Maxi Bunny Line 1200 is a powerful linear inground LED luminaire designed for high-impact architectural and tunnel lighting applications. Constructed from extruded aluminum EN AW-6060 T5 with die-cast aluminum components and protected by an 8 mm tempered glass diffuser, it offers outstanding durability and corrosion resistance, supported by an IP67 rating for demanding outdoor environments. Available with multiple beam angles—including narrow, medium, symmetric, asymmetric, and wall-washer distributions—it provides precise and uniform illumination for façades, large walls, and structured surfaces. Operating on 24V DC with a remote driver configuration and offering dimming options such as Non-dimmable, 0–10V, Casambi, and DALI, the Maxi Bunny Line 1200 combines high visual comfort, functional minimal design, and reliable long-term performance, backed by a 5-year warranty.

## LIGHTING:

LED

LED

## VOLTAGE:

110-277V



## GASKETS:

Silicone gaskets

## FIXTURE TYPE:

Inground Luminaires

## MATERIAL:

Extruded aluminum EN AW-6060 T5 high resistance to oxidation,  
Die-cast aluminum EN AB 44100 highly resistant to oxidation

## EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent  
lubricating solution

## DIFFUSER MATERIAL:

Tempered glass 8mm

## IP RATING:

IP 67

IP67

**THINK BOLLARD - THINK BULLARD**

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)

[www.bullardbollards.com](http://www.bullardbollards.com)

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard



**CODE:**

**BB-001548.FLMTTUNEL-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

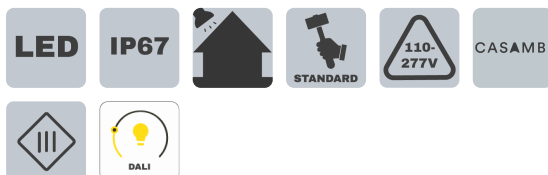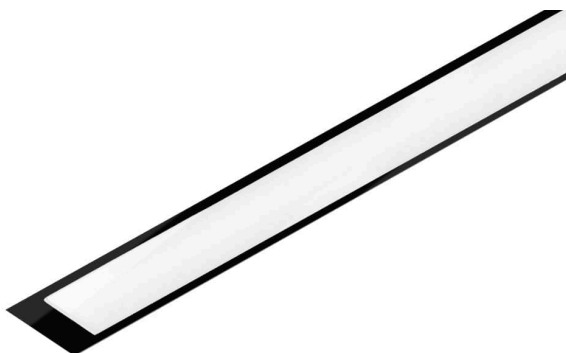

#### APPLINCE CLASS:

|||

#### OPERATION RANGE:

24 V DC

#### DRIVER POSITION:

Remote

#### CRI:

>90

#### CABLE ENTRY / CABLE TYPE:

Brass cable gland M12 Ø 3.5/7 mm / FR5FOEM7-AD8 2x0.5mm2

#### CORD LENGTH:

0.5m

#### LIGHT DISTRIBUTION:

12° - Symmetrical narrow beam ( $\leq 15^\circ$ )  
25° - Symmetrical medium flood ( $15^\circ - 45^\circ$ )  
50° - Symmetrical wide beam ( $45^\circ - 125^\circ$ )  
14° x 47° - 2 Axis symmetrical  
78° x 47° - Asymmetric flood (wall washer)  
69° x 139° - 2 Axis symmetrical

#### BEAM DIRECTIONABILITY:

Fixed optics

#### OPTICS:

Anti UV technopolymer lens

#### WARRANTY:

LED lighting products are warranted for 5 years.

#### MAIN FEATURES:

High visual comfort / Wide range of finishes  
Functional design / Minimal design  
Shock resistant / Operating Temperature:  $-22^\circ\text{F} \sim 122^\circ\text{F}$

#### FINISH OPTIONS:

Glass

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA





**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**CODE:**

**BB-001548.FLMTTUNEL-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

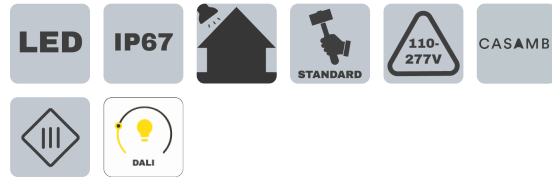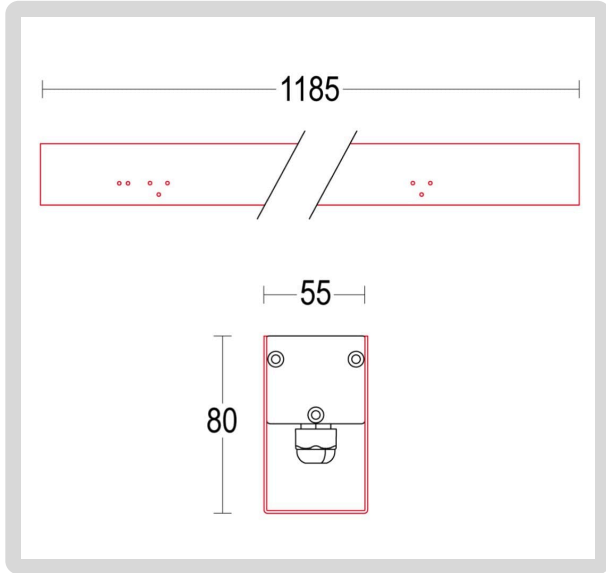

**HOW TO ORDER:**

**CODE:**

**Example:**

**CODE: BB-001548.FLMTTUNEL-GH-B25-4-DIM-AC204**

BB-001548.FLMTTUNEL-GH-B25-4-DIM-AC204

**1**

**DIMENSIONS:**

- A) Recessed depth - Ø: 3.15" (8 cm)  
B) Length - L: 46.65" (118.5 cm)  
C) Width - W: 2.17" (5.5 cm)

**2**

**LIGHT SOURCE:**

| CODE       | BEAM ANGLE | WATTAGE    | KELVINS    | LUMENS      |         |
|------------|------------|------------|------------|-------------|---------|
| -B12-1     | 12°        | 1 x 50.4W  | 3000K      | 1 x 4704 lm | 24 V DC |
| -B12-2     |            | 1 x 36W    | 3000K      | 1 x 3504 lm | 24 V DC |
| -B12-3     |            | 1 x 50.4W  | 4000K      | 1 x 5232 lm | 24 V DC |
| -B12-4     |            | 1 x 27W    | 4000K      | 1 x 2916 lm | 24 V DC |
| -B25-1     | 25°        | 1 x 53.2W  | 2700-6500K | 1 x 5492 lm | 24 V DC |
| -B25-2     |            | 1 x 50.4W  | 3000K      | 1 x 4704 lm | 24 V DC |
| -B25-3     |            | 1 x 36W    | 3000K      | 1 x 3504 lm | 24 V DC |
| -B25-4     |            | 1 x 50.4W  | 4000K      | 1 x 5232 lm | 24 V DC |
| -B25-5     |            | 1 x 27W    | 4000K      | 1 x 2916 lm | 24 V DC |
| -B50-1     | 50°        | 1 x 50.4W  | 3000K      | 1 x 4704 lm | 24 V DC |
| -B50-2     |            | 1 x 36W    | 3000K      | 1 x 3504 lm | 24 V DC |
| -B50-3     |            | 1 x 37.8W  | 4000K      | 1 x 3924 lm | 24 V DC |
| -B50-4     |            | 1 x 27W    | 4000K      | 1 x 2916 lm | 24 V DC |
| -B14-47-1  | 14° x 47°  | 1 x 50.4W  | 3000K      | 1 x 4704 lm | 24 V DC |
| -B14-47-2  |            | 1 x 36W    | 3000K      | 1 x 3504 lm | 24 V DC |
| -B14-47-3  |            | 1 x 37.8W  | 4000K      | 1 x 3924 lm | 24 V DC |
| -B14-47-4  |            | 1 x 27W    | 4000K      | 1 x 2916 lm | 24 V DC |
| -B78-47-1  | 78° x 47°  | 1 x 50.4W  | 3000K      | 1 x 4704 lm | 24 V DC |
| -B78-47-2  |            | 1 x 36W    | 3000K      | 1 x 3504 lm | 24 V DC |
| -B78-47-3  |            | 1 x 37.8W  | 4000K      | 1 x 3924 lm | 24 V DC |
| -B78-47-4  |            | 1 x 27W    | 4000K      | 1 x 2916 lm | 24 V DC |
| -B69-139-1 | 69° x 139° | 1 x 16.68W | 3000K      | 1 x 1990 lm | 24 V DC |
| -B69-139-2 |            | 1 x 24W    | 3000K      | 1 x 2568 lm | 24 V DC |
| -B69-139-3 |            | 1 x 12.33W | 4000K      | 1 x 1618 lm | 24 V DC |
| -B69-139-4 |            | 1 x 18W    | 4000K      | 1 x 1992 lm | 24 V DC |

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA







**BULLARD  
BOLLARDS**  
Think Bullard Think Bullard

**CODE:  
BB-001548.FLMTTUNEL-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

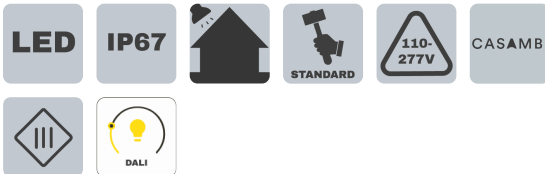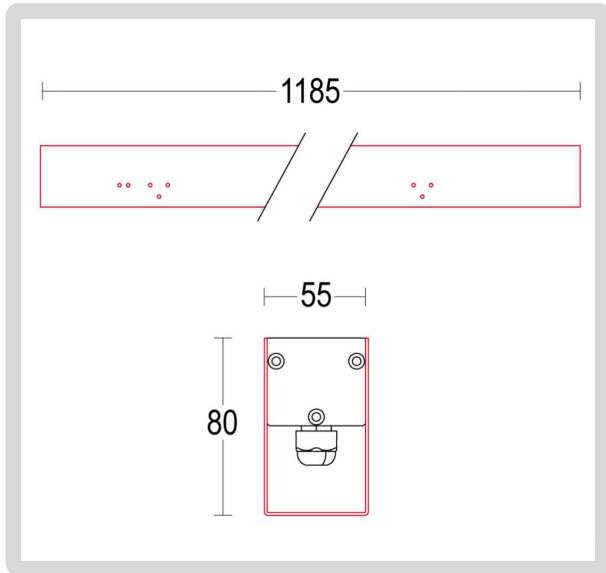

#### HOW TO ORDER:

CODE:

Example:  
CODE: BB-001548.FLMTTUNEL-GH-B25-4-DIM  
-AC204

BB-001548.FLMTTUNEL-GH-B25-4-DIM-AC204

3

#### DIMMING OPTIONS:

- NON NON-Dimmable
- DIM 0-10V
- CAS Casambi
- DAL Dali

4

#### ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC279

IP 68 connector for through wiring 4P




-AC436

Rough-in housing 1185mm



-AC551

Extraction tool Traccia



-AC538

Anti glare louver 1200mm

(FOR 12° / 25° / 50° /  
69° x 139° / 14° x 47°)



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 02/18/2026