



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

BUNNY RISE 500 (INGROUND LUMINAIRES)






**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-001531.AHXA-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

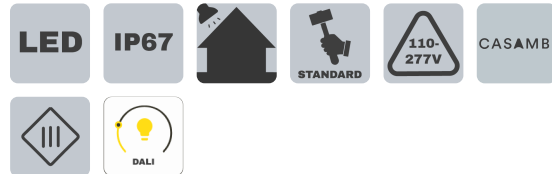

GENERAL INFORMATION:

The Bunny Rise 500 is a compact linear inground LED luminaire designed to deliver clean, uniform architectural lighting in a discreet and minimalist form. Constructed from extruded aluminum EN AW-6060 T5 for superior resistance to oxidation and finished with an 8 mm tempered glass diffuser, it ensures durability and reliable outdoor performance with an IP67 rating. Featuring a wide 145° × 152° light distribution and fixed optics, it provides smooth wall-washing and pathway illumination, making it ideal for façades, landscaped areas, and contemporary exterior spaces. Available in 3000K or 4000K with multiple dimming options (Non-dimmable, 0–10V, Casambi, DALI) and remote driver configuration, the Bunny Rise 500 combines high visual comfort, shock resistance, and long-term performance, backed by a 5-year warranty.

LIGHTING:

LED

LED

VOLTAGE:

110-277V



GASKETS:

Silicone gaskets

FIXTURE TYPE:

Inground Luminaires

MATERIAL:

Extruded aluminum EN AW-6060 T5 high resistance to oxidation

DIFFUSER MATERIAL:

Tempered glass 8mm

IP RATING:

IP 67

IP67

APPLINCE CLASS:

|||

OPERATION RANGE:

24 V DC

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

CODE:
BB-001531.AHXA-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

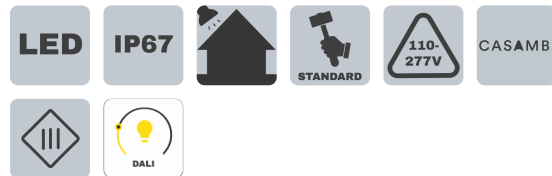

DRIVER POSITION:

Remote

CRI:

>90

CABLE ENTRY / CABLE TYPE:

Cable gland PE-LD 5.2mm / FR5FOEM7-AD8 2x0.5mm²

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

145° x 152°

BEAM DIRECTIONABILITY:

Fixed optics

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort
Wide range of finishes
Functional design
Minimal design
Shock resistant
Operating Temperature: -22°F~122°F

FINISH OPTIONS:

Glass

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA





**BULLARD
BOLLARDS**
Think Bollard Think Bullard

CODE:
BB-001531.AHXA-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

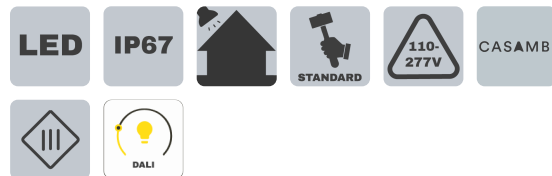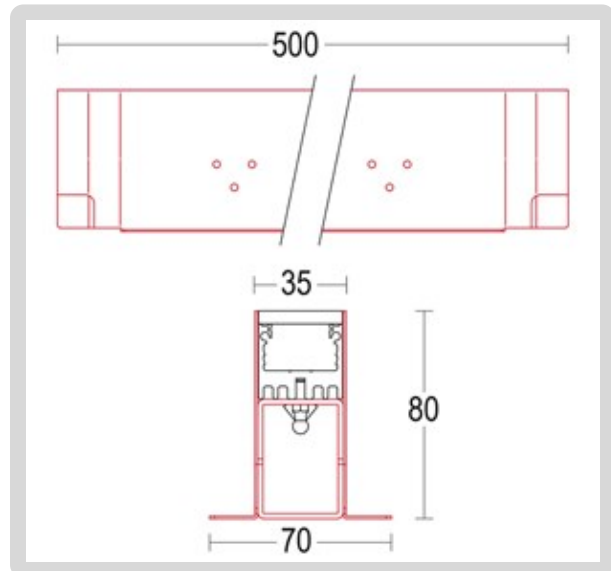

HOW TO ORDER:

CODE:

Example:
CODE: BB-001531.AHXA-GH-L2-DIM-AC562

BB-001531.AHXA-
GH-L2-DIM-
AC562

1 MODELS:

- A) Recessed depth - P: 3.15" (8 cm)
B) Length - L: 19.69" (50 cm)
C) Width - W: 1.38" (3.5 cm)
D) Cutout width - CW: 2.76" (7 cm)

2 BEAM ANGLE:

145° x 152°

3 LIGHT SOURCE:

- L1 LED | 1 x 7.25W | 3000K | 1 x 865 lm | 110-277V
-L2 LED | 1 x 9.5W | 4000K | 110-277V

4 DIMMING OPTIONS:

- NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

5 ACCESSORIES:

-AC163

Power connector



-AC550

Joint plate Traccia




-AC279

IP 68 connector for through wiring 4P



-AC551

Extraction tool Traccia



-AC164

Connector end cap



-AC562

Rough-in housing end cup for concreting Traccia



-AC531

Rough-in housing Traccia 500 – Ground



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA