



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**PARIO**  
**STANDARD GRADE**





**BULLARD  
BOLLARDS**  
Think Bullard Think Bullard

**CODE:  
BB-SPGH11-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



#### GENERAL INFORMATION:

The Pario from Bullard Bollards is a durable outdoor lighting bollard made from corrosion-resistant die-cast aluminum with multiple height and finish options. It features efficient LED sources in various wattages and color temperatures, an IP65 rating for weather protection, and impact-resistant lens choices. Designed for pathways, landscapes, and architectural spaces, it combines reliability, performance, and customizable style.

#### FIXTURE TYPE:

Urban Lights

#### VOLTAGE:

110-277V



#### MATERIAL:

Die-cast aluminum EN AB 44100 highly resistant to oxidation

#### OPTICAL:

24° / 40° / 58° / 11° / 47° / 16° / 38° / 65°

#### IP RATING:

IP 65

**IP65**

#### DRIVER POSITION:

Integral

#### LENS:

Tempered glass 5 mm

#### WARRANTY:

LED lighting products are warranted for 5 years.

#### MAIN FEATURES:

High visual comfort  
Wide range of finishes  
Functional design  
Minimal design  
Shock resistant  
Operating Temperature: -22°F~122°F

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2024 All Rights Reserved

Updated 02/18/2025



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**CODE:  
BB-SPGH11-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

## HOW TO ORDER:

CODE:

Example:

CODE: BB-SPGH11-GH-100-L6-K30-B24-AC969-BM-CAS

BB-SPGH11-GH-100-  
L6-K30-B24-AC969-  
BM-CAS

1

## MODELS:

-100

### DIMENSIONS:

A) Height - H: 3.86" (9.8 cm)

B) Diameter - Ø: 4.02" (10.2 cm)

2

## LIGHT SOURCE:

-L6 LED / 1 x 6.3 W / 110-277V

-L11 LED / 1 x 11.3 W / 110-277V

-L16 LED / 1 x 16.5 W / 110-277V

3

## CCT & LUMENS:

Kelvins | Lm (6.3 W) | Lm (11.3 W) | Lm (16.5 W)

-K30 3000K | 998 lm | 1715 lm | 2410 lm

-K40 4000K | 1073 lm | 1844 lm | 2592 lm

4

## BEAM ANGLE:

-B24 24°

-B40 40°

-B58 58°

5

## POLES:

-AC969


Cylindrical poles with  
base Ø: 2.36" (6 cm)  
13.12 ft (4 m)

-AC978

Cylindrical poles with  
base Ø: 2.36" (6 cm)  
8.20 ft (2.5m)

-AC979

Cylindrical poles to be  
buried Ø: 2.36" (6 cm)  
13.12 ft (4 m)

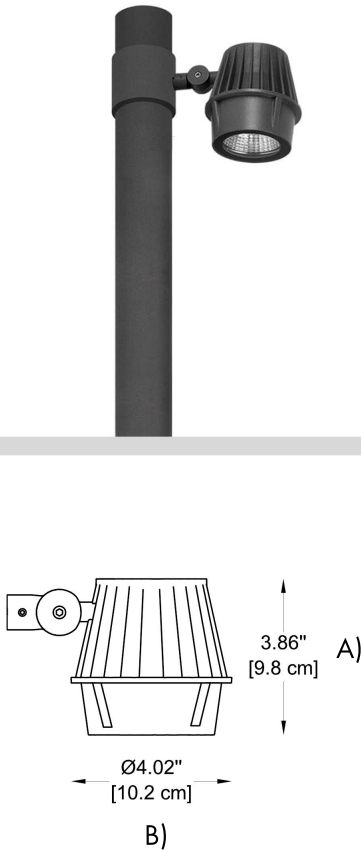

LED

IP65



©LUTRON

CASAMBI

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**CODE:  
BB-SPGH11-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

## HOW TO ORDER:

CODE:

Example:

CODE: BB-SPGH11-GH-100-L6-K30-B24-AC969-BM-CAS

BB-SPGH11-GH-100-  
L6-K30-B24-AC969-  
BM-CAS

## 1 MODELS:

-150

### DIMENSIONS:

A) Height - H: 5.79" (14.7 cm)

B) Diameter - Ø: 5.91" (15 cm)

## 2 LIGHT SOURCE:

-L16 LED / 1 x 16.5 W / 110-277V

-L23 LED / 1 x 23.7 W / 110-277V

-L31 LED / 1 x 31.3 W / 110-277V

## 3 CCT & LUMENS:

Kelvins | Lm (16.5 W) | Lm (23.7 W) | Lm (31.3 W)

-K30 3000K | 2410 lm | 3306 lm | 4166 lm

-K40 4000K | 2592 lm | 3555 lm | 4479 lm

## 4 BEAM ANGLE:

-B11 11°

-B47 47°


## 5 POLES:

-AC969 Cylindrical poles with  
base Ø: 2.36" (6 cm)  
13.12 ft (4 m)

-AC978 Cylindrical poles with  
base Ø: 2.36" (6 cm)  
8.20 ft (2.5m)

-AC979 Cylindrical poles to be  
buried Ø: 2.36" (6 cm)  
13.12 ft (4 m)

-AC900 Tapered poles to be  
buried Ø: 2.36" (6 cm)  
13.12 ft (4 m)

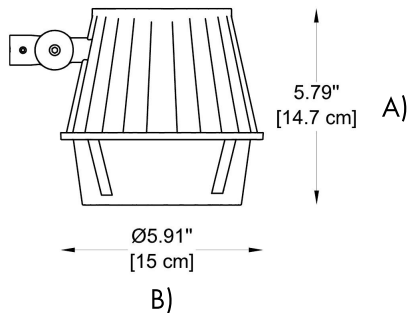

LED

IP65



LUTRON

CASAMBI

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2024 All Rights Reserved

Updated 09/12/2025



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**CODE:  
BB-SPGH11-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

#### HOW TO ORDER:

CODE:

Example:

CODE: BB-SPGH11-GH-100-L6-K30-B24-AC969-BM-CAS

BB-SPGH11-GH-100-  
L6-K30-B24-AC969-  
BM-CAS

#### 1 MODELS:

-200

##### DIMENSIONS:

A) Height - H: 7.68" (19.5 cm)

B) Diameter - Ø: 4.02" (20cm)

#### 2 LIGHT SOURCE:

-L38 LED / 1 x 38.7 W / 110-277V

-L51 LED / 1 x 51.6 W / 110-277V

#### 3 CCT & LUMENS:

Kelvins | Lm (38.7 W) | Lm (51.6 W)

-K30 3000K | 5754 lm | 7461 lm

-K40 4000K | 6212 lm | 8056 lm

#### 4 BEAM ANGLE:

-B16 16°

-B38 38°

-B65 65°


#### 5 POLES:

-AC900 Tapered poles to be  
buried Ø: 2.36" (6 cm)  
13.12 ft (4 m)

-AC903 Tapered poles to be  
buried Ø: 2.36" (6 cm)  
16.40 ft (4 m)

-AC969 Cylindrical poles with  
base Ø: 2.36" (6 cm)  
13.12 ft (4 m)

-AC979 Cylindrical poles to be  
buried Ø: 2.36" (6 cm)  
13.12 ft (4 m)

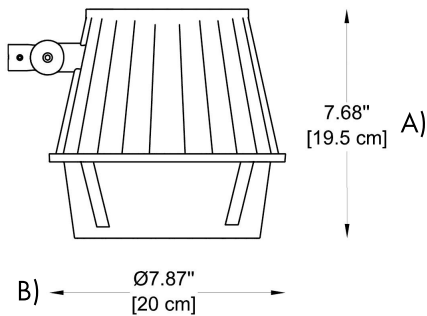

LED

IP65



©LUTRON

CASAMBI

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD  
BOLLARDS**  
Think Bullard Think Bullard

**CODE:  
BB-SPGH11-GH**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



**HOW TO ORDER:**

**CODE:**

Example:

CODE: BB-SPGH11-GH-100-L6-K30-B24-AC969-BM-CAS

BB-SPGH11-GH-100-  
L6-K30-B24-AC969-  
BM-CAS

**6**

**FINISH OPTIONS:**

- AG Anthracite grey (matt)
- LG Light grey (matt)
- WM White matt
- BM Black matt
- CM Corten matt
- BR Bronze
- AGM Antique grey (matt)
- BM Blue matt
- SM Sand matt
- GM Green matt

**7**

**DIMMING OPTIONS:**

- NON NON-Dimmable
- DIM 0-10V
- CAS Casambi
- LUT Lutron
- DAL Dali

**LED**

**IP65**



**LUTRON**

**CASAMBI**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BB-SPGH11-GH-100-L6-K30-B24-AC969-BM-CAS

BB-SPGH11-GH-100-  
L6-K30-B24-AC969-  
BM-CAS

**8**

**ACCESSORIES FOR 100 MODELS:**

**-AC204**

IP 68 fast connector 4P



**-AC204-5P**

IP 68 fast connector 5P




**-AC222.0350019SD-67**

Driver LED IP67  
350mA 19W DALI



**-AC248.0350019SN-67**

Driver LED IP67  
350mA 19W On/Off



**-AC224**

Hood Maxipario



**-AC226**

Elipsoidal lens Minipario



**-AC231**

Anti glare louver Minipario



**-AC232**

Microprismatic Lens Minipario



**-AC414**

Pole attachment  
Ø: 2.36" (60 mm) family  
Pario - Single



**-AC424**

Pole attachment  
Ø: 2.36" (60 mm)  
family Pario - Double



sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BB-SPGH11-GH-100-L6-K30-B24-AC969-BM-CAS

BB-SPGH11-GH-100-  
L6-K30-B24-AC969-  
BM-CAS

**8**

**ACCESSORIES FOR 150 MODELS:**

**-AC204**

IP 68 fast connector 4P




**-AC222.0500027SD-67**

Driver LED IP67  
500mA 27W DALI



**-AC248.0500027SN-67**

Driver LED IP67  
500mA 27W On/Off



**-AC227**

Hood Pario



**-AC229**

Elipsoidal lens Pario




**-AC234**

Microprismatic lens Pario



**-AC233**

Anti glare louver Pario



**-AC414**

Pole attachment  
Ø: 2.36" (60 mm) family  
Pario - Single



**-AC424**

Pole attachment  
Ø: 2.36" (60 mm)  
family Pario - Double



sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BB-SPGH11-GH-100-L6-K30-B24-AC969-BM-CAS

BB-SPGH11-GH-100-  
L6-K30-B24-AC969-  
BM-CAS

8

**ACCESSORIES FOR 150 MODELS:**

**-AC204**

IP 68 fast connector 4P




**-AC222.0800044SD-67**

Driver LED IP67  
800mA 44W DALI



**-AC248.0800044SN-67**

Driver LED IP67  
800mA 44W On/Off



**-AC239**

Hood Maxipario



**-AC242**

Elipsoidal lens Maxipario




**-AC243**

Microprismatic lens Maxipario



**-AC241**

Anti glare louver Maxipario



**-AC414**

Pole attachment  
Ø: 2.36" (60 mm)family  
Pario - Single



**-AC424**

Pole attachment  
Ø: 2.36" (60 mm)  
family Pario - Double



sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA