




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

SPEAKO
BB-SPK-BL



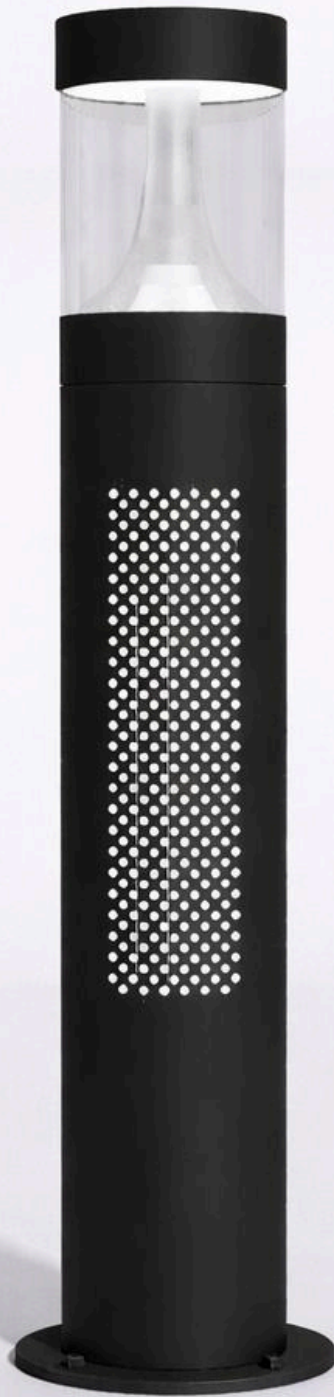

FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The Speako Bollard seamlessly combines high-fidelity audio with ambient LED lighting, creating the perfect blend of functionality and style for outdoor spaces. Designed for durability, it delivers 360-degree sound coverage through premium aluminum cone woofers and a dome tweeter, while its energy-efficient lighting enhances safety and ambiance. Ideal for gardens, pathways, and public spaces, the Speako Bollard is built to withstand various weather conditions and offers customizable finishes to complement any landscape. With easy installation and a sleek, modern design, it's the perfect solution for enriching outdoor environments with both sound and illumination.

FIXTURE TYPE:

Bollard

VOLTAGE:

110-277V



MATERIAL:

Die-cast Aluminum, acrylic

IP RATING:

IP 65



DRIVER POSITION:

Remote

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- High visual comfort
- Wide range of finishes
- Functional design
- Minimal design
- Shock resistant
- Operating Temperature: -25°C..+60°C

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646





991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

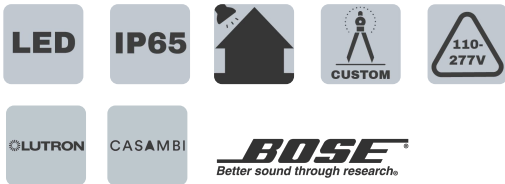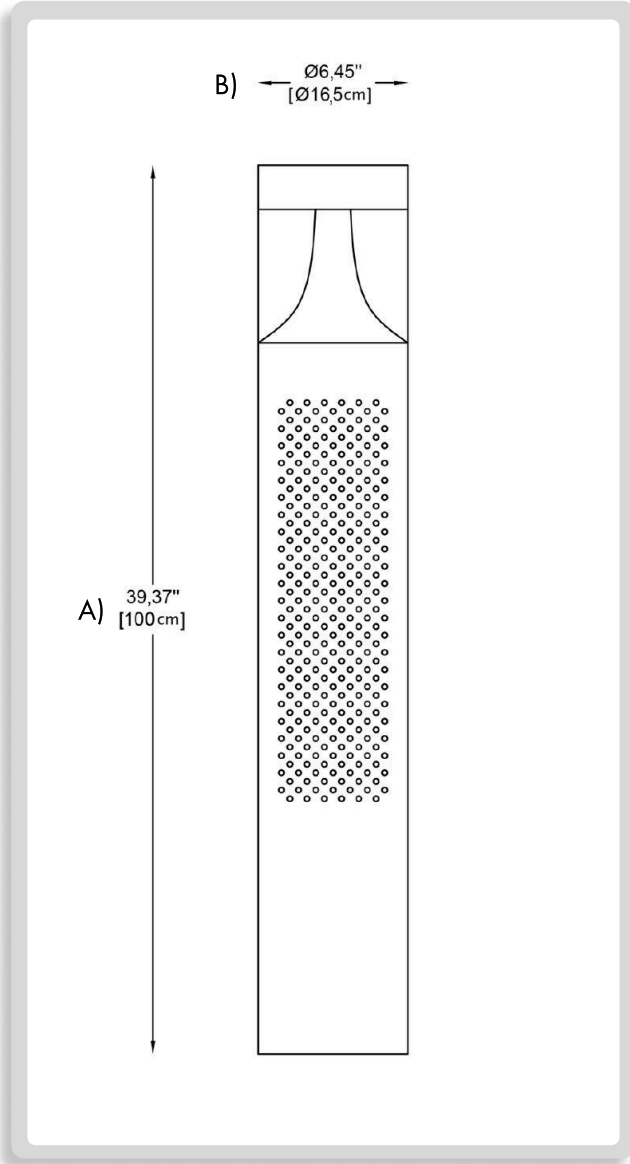

HOW TO ORDER:

CODE:

Example:
CODE: BB-SPK-BL-K30-BL-B1-DIM

BB-SPK-BL-K30-
BL-B1-DIM

1 DIMENSIONS:

A) Height - H: 40" (100 cm)
B) Diameter - Ø: 6.5"(16.5 cm)

2 LIGHT SOURCE:

LED / 10W / 600 lm / 80 CRI / 110-277V

3 BOSE® SPEAKERS PARAMETERS





Using local area network digital audio transmission technology, the signal has no compression, loss, and delay; The interface is a 10/100M network audio module, which adopts the ARM+DSP architecture, which can receive network audio data streams, convert them into audio analog signals, and output CDlevel playback sound quality:

Speaker impedance: 4 ohms
Distortion: 2%
Frequency range: 55HZ-21 KHZ
Sensitivity: 91db
Type: Full-range speaker
Audio power: 125W max

4 CCT:

-K30 3000K
-K35 3500K
-K40 4000K

5 FINISH OPTIONS:

-BL Black 
-LG Light Grey 
-DG Dark Grey 
-CUS Custom on request* 

6 BEAM ANGLE:

-B1 180°
-B2 360°

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-SPK-BL**

FIXTURE TYPE: _____

PROJECT NAME: _____

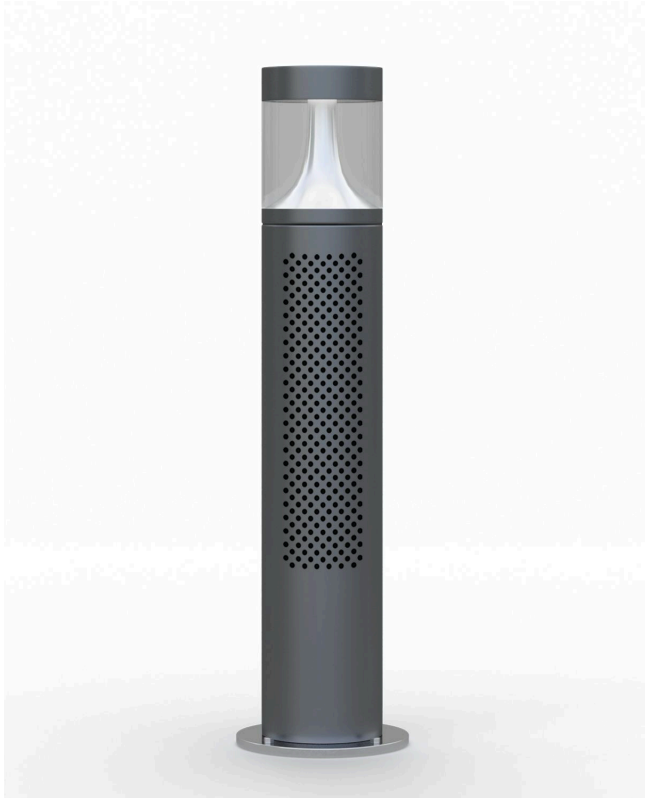

HOW TO ORDER: _____ **CODE:** _____

Example:
CODE: BB-SPK-BL-K30-BL-B1-DIM

BB-SPK-BL-K30-
BL-B1-DIM

7 **DIMMING OPTIONS:**

- NON NON-Dimmable
- DIM 0-10V
- CAS Casambi
- LUT Lutron
- DAL Dali

LED IP65 CUSTOM

Better sound through research.

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-SPK-BL**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-SPK-BL-K30-BL-B1-DIM

BB-SPK-BL-K30-
BL-B1-DIM

BOLT PATTERNS & HARDWARE KITS:

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA