



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

BUNNY MINITRACK C300



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:




GENERAL INFORMATION:

The Bunny MiniTrack 300 Series of linear fixtures to be recessed in the ceiling with very low recess depth characterized by high level of visual comfort. Available in various lengths. Designed for lighting of exterior and interior application thanks to the wide availability of optics and powers. The body and diffuser closure caps are constructed of high oxidation resistant aluminum alloy which is subjected to nano-bonderite treatment and finished with texturized polyester powder paint, making the product resistant to atmospheric agents and UV rays, guaranteeing maximum protection over the years. The external finishing frame and screws are in stainless steel. Silicone gaskets ensure maximum sealing in all operating and temperature conditions. The ultra transparent tempered sodium calcium glass diffuser ensures maximum light transmittance and is finished with a silkscreen border. The product, thanks to the steel bracket system, can be easily installed in any kind of false ceiling or suspended ceiling.

LIGHTING:

LED 

VOLTAGE:

110-277V 

GASKETS:

Silicone gaskets

FIXTURE TYPE:

Ceiling Luminaires

MATERIAL:

Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation, Die-cast aluminum EN AB 44100 highly resistant to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 8mm

IP RATING:

IP 68 

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
 www.bullardbollards.com
 1-877-964-4646



991 South Gull Lake Dr
 Richland, MI 49083
 USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



APPLINCE CLASS:

III



OPERATION RANGE:

110-277V - 50/60 Hz

DRIVER POSITION:

Integral

CRI:

>90

CABLE ENTRY / CABLE TYPE:

Nylon cable gland M20 Ø 7/13 mm / H07RN8-F 3x1 mm²

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

- 12° - Symmetrical narrow beam (<=15°)
- 25° - Symmetrical medium flood (15° - 45°)
- 50° - Symmetrical wide beam (45° - 125°)
- 14° x 47° - 2 Axis symmetrical
- 78° x 47° - Asymmetric flood (wall washer)

BEAM DIRECTIONABILITY:

Fixed optics

OPTICS:

Anti UV technopolymer lens


WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- High visual comfort
- Wide range of finishes
- Functional design / Minimal design
- Operating Temperature: -22°F~122°F

FINISH OPTIONS:

Stainless steel 

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

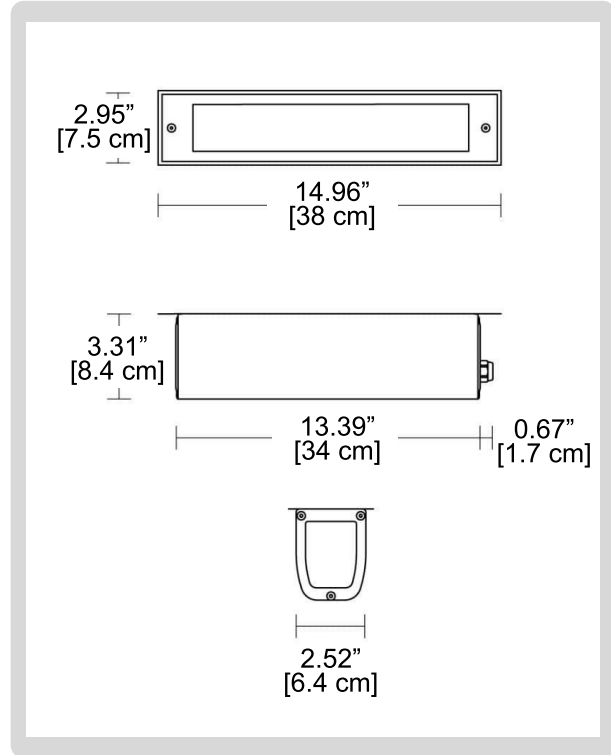

HOW TO ORDER:

CODE:

Example:
CODE: BB-001080.LVST-GH-B2-L2-DIM-AC204

BB-001080.LVST-GH-B2-L2-DIM-AC204

1 DIMENSIONS:

- A) Recessed depth - P: 3.31" (8.4 cm)
- B) Length - L: 14.96" (38 cm)
- C) Width - W: 2.95" (7.5 cm)

2 BEAM ANGLE:

- B1 12°
- B2 25°
- B3 50°
- B4 14° x 47°
- B5 78° x 47°

3 LIGHT SOURCE:

- L1 LED | 1 x 9W | 3000K | 1 x 876 lm | 110-277V
- L2 LED | 1 x 9W | 4000K | 1 x 972 lm | 110-277V

4 DIMMING OPTIONS:

- NON NON-Dimmable
- DIM 0-10V
- DAL Dali

5 ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC204-5P

IP 68 fast connector 5P



-AC279

IP 68 connector for through wiring 4P



-AC279-5P

IP 68 connector for through wiring 5P



-AC603

Rough-in housing 300



-AC573

Ceiling brackets



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA