




**BULLARD
BOLLARDS**
Think Bollard Think Bullard



LUNARA FLAT SQ (CEILING RECESSED)

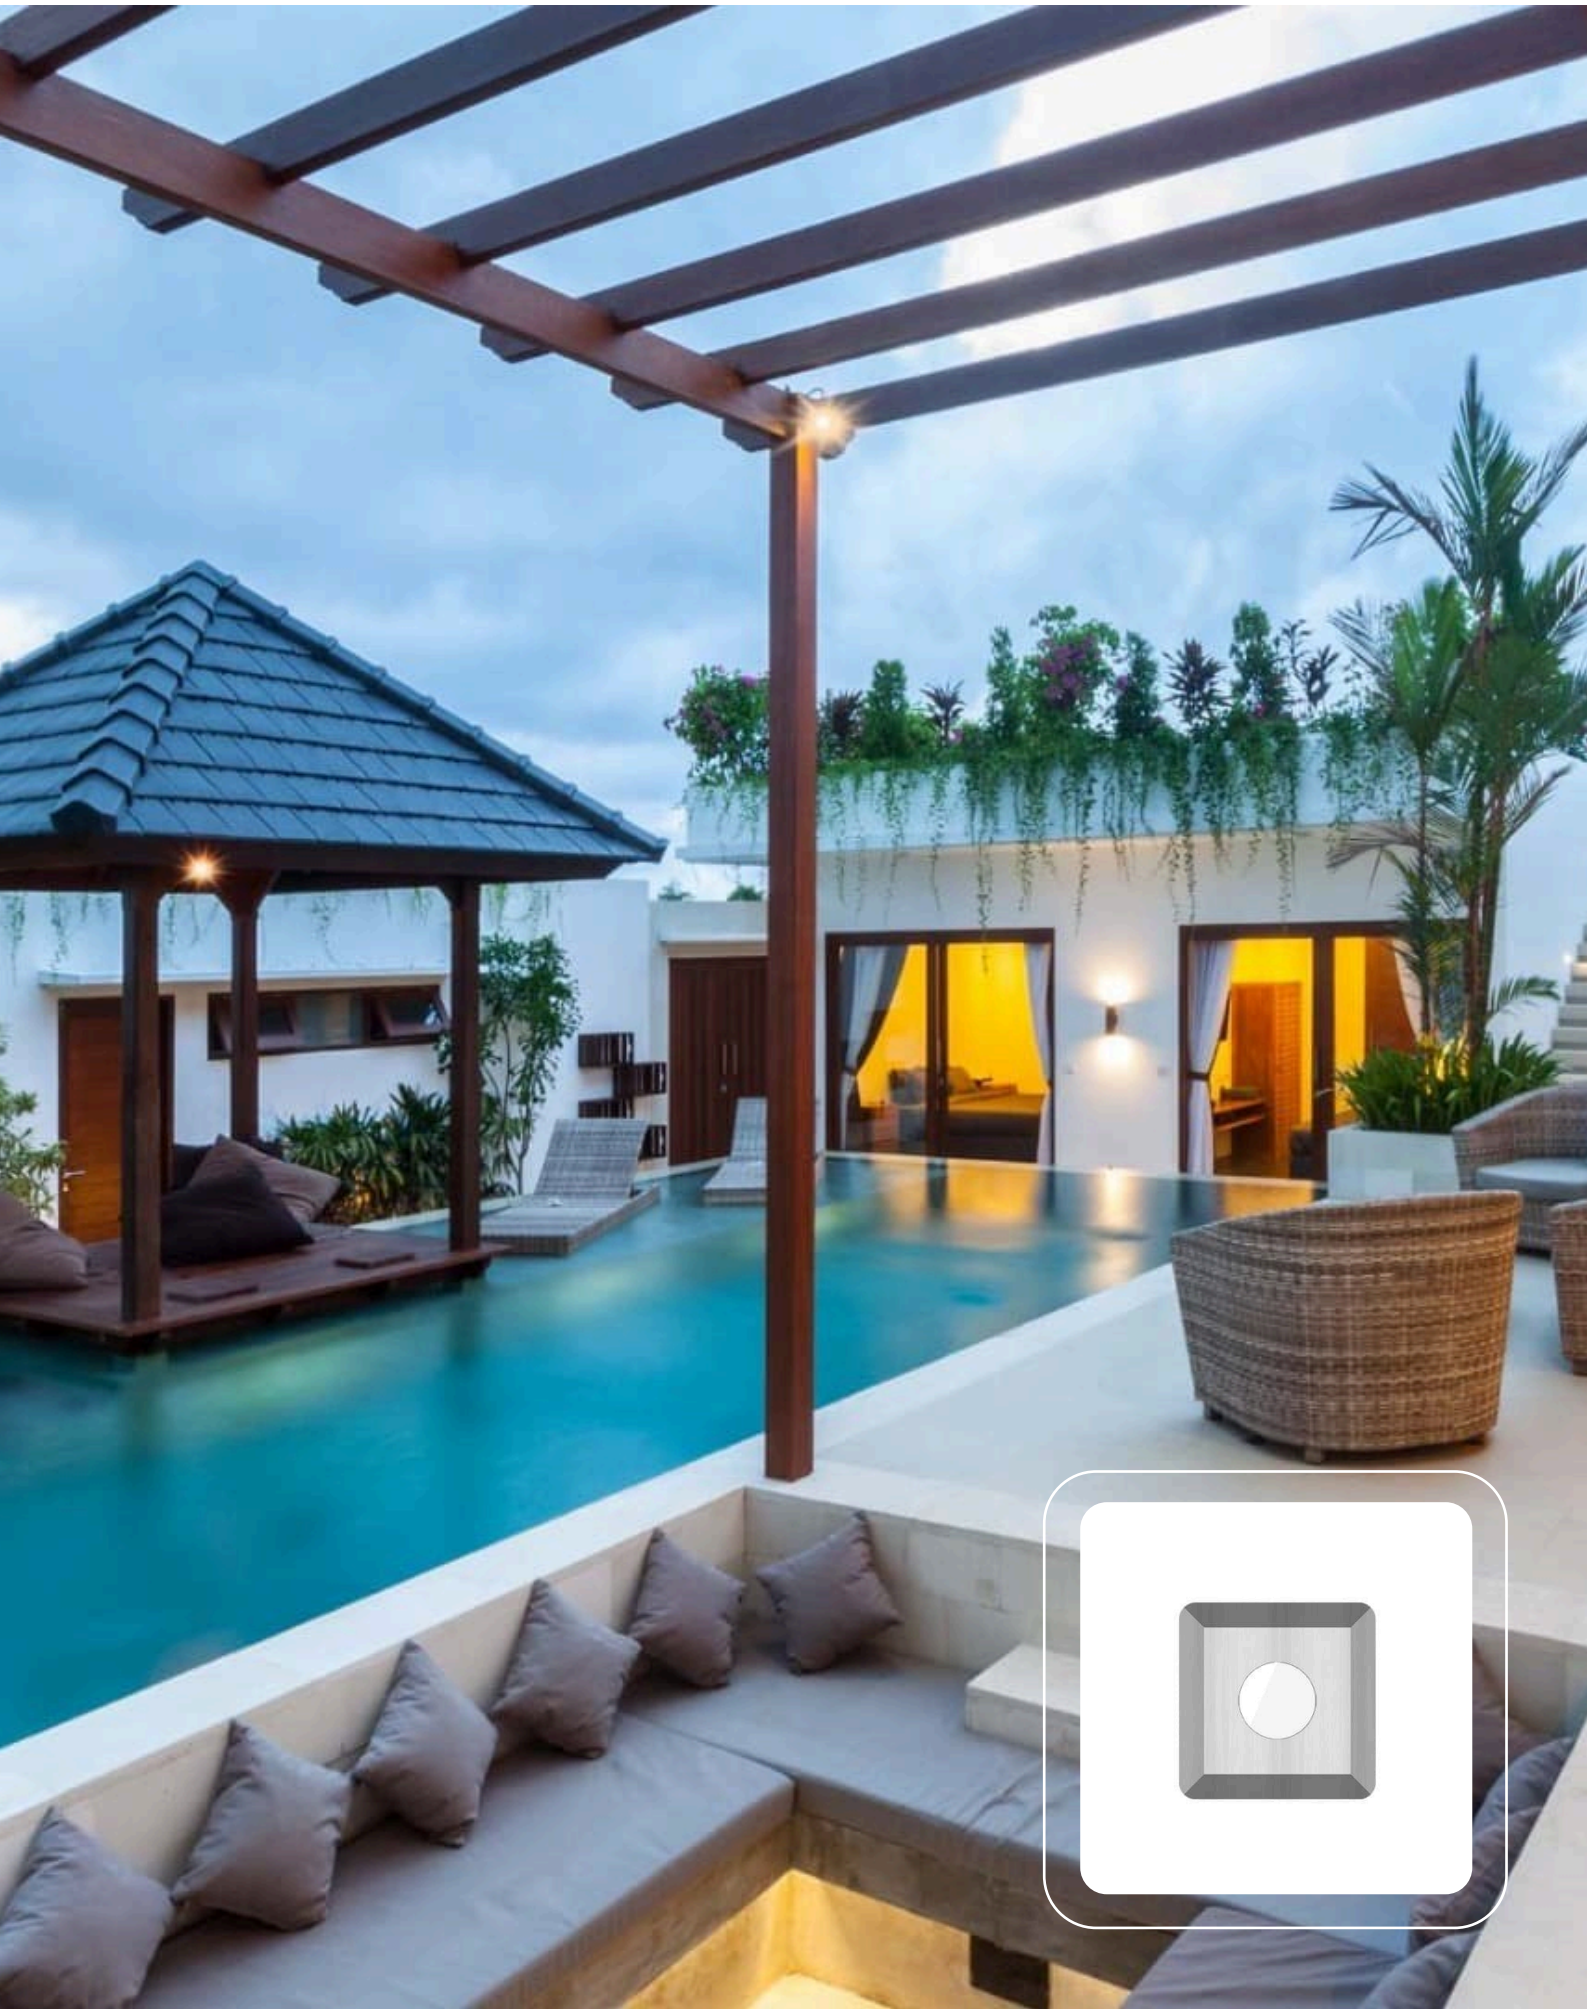

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

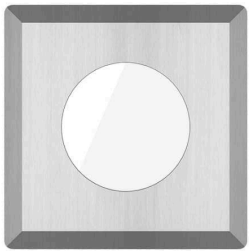

GENERAL INFORMATION:

The LUNARA FLAT SQ recessed ceiling luminaire is a compact square LED fixture designed for clean architectural integration and soft, uniform illumination. Manufactured from high-quality stainless steel and extruded aluminum with an anodized finish, it provides excellent durability and resistance to oxidation for long-term performance in indoor and covered outdoor environments. The fixture features an efficient LED light source combined with a tempered glass diffuser to deliver wide, comfortable light distribution with high visual comfort. With an IP68 rating, silicone gaskets, and a remote driver configuration, the BB-1033 ensures reliable operation in demanding conditions while offering multiple size options, finish selections, and dimming capabilities for flexible architectural lighting applications.

FIXTURE TYPE:

Ceiling Recessed

LIGHTING:

LED



INPUT VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation

GASKETS:

Silicone gaskets

FINISH AND PROTECTION:

Anodizing treatment

CUTOUT SHAPE:

Round

DRIVER POSITION:

Remote

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
 www.bullardbollards.com
 1-877-964-4646





991 South Gull Lake Dr
 Richland, MI 49083
 USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



CRI:

>90

IP RATING:

IP68

IP68

APPLINCE CLASS:

III



CONTROL:

Dim based on driver

BEAM ANGLE / LIGHT DISTRIBUTION / BEAM DIRECTIONABILITY:

115° Symmetrical wide beam (45° - 125°) Fixed optics

CABLE ENTRY:

Cable gland PE-LD 5.2mm

CABLE TYPE:

FR5FOEM7-AD8 2x0.5mm²

CORD LENGTH:

50 cm

DIFFUSER MATERIAL:

Tempered glass 5mm

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- High visual comfort
- Wide range of finishes
- Functional design
- Minimal design
- Reduced overhang
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- * upon request previous specific components and test

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA




FIXTURE TYPE: _____

PROJECT NAME: _____


-32



-45



-55



HOW TO ORDER:

CODE:

Example:
CODE: BB-1033.00BAXW-GH-32-L2-350-68-DIM-AC205-IP66

BB-1033.00BAXW
-GH-32-L2-350
-68-DIM-AC205-IP66

1 MODELS:

-32
Width - W: 1.26" (3.2 cm)
Length - L: 1.26" (3.2 cm)

-45
Width - W: 1.77" (4.5 cm)
Length - L: 1.77" (4.5 cm)

-55
Width - W: 2.17" (5.5 cm)
Length - L: 2.17" (5.5 cm)

2 LIGHT SOURCE:

-L1 LED / 1 x 1W / 3000K / 1 x 105 lm
-L2 LED / 1 x 1W / 4000K / 1 x 116 lm



3 CONTROL GEAR/OPERATION RANGE:

-24V 24 V DC
-350 350 mA

4 FINISH OPTIONS:

-15 Stainless steel
-68 Natural bronze

5 DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

6 ACCESSORIES:

-AC205-IP66
IP66 remote power supply box



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA