



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

SLICK WILLY PRECISION FLEX
BB-SLWL PX-CL





**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-SLWLPX-CL**

FIXTURE TYPE: _____

PROJECT NAME: _____

-24V.3D2021.LPX



GENERAL INFORMATION:

Engineered for architectural excellence, this high-performance silicone neon LED delivers refined, shadow-free illumination with exceptional durability across demanding environments. Featuring a high-efficiency light source (LM80 certified) and a precision optical distribution design, it ensures perfectly uniform light with no visible dots or shadows; pure, continuous elegance. Crafted using an advanced three-color silicone extrusion process, the strip offers superior flexibility, clean cutting accuracy, and a sleek, dust-resistant finish. Compared to traditional PVC solutions, its premium silicone body provides enhanced resilience and a more sophisticated aesthetic. Built to endure, it resists UV exposure, corrosion, saline environments, acids, and alkalis, making it ideal for both indoor and outdoor architectural applications.

FIXTURE TYPE:

Arch LED Neon

MATERIAL:

Three-color silicone extrusion process

IP RATING:

IP67

IP67

IK RATING:

IK08

IK08

WARRANTY:

5 year warranty, high reliability

DRIVER POSITION:

Remote

MAIN FEATURES:

Light source: High luminous efficiency, LM80 proved.
Optical Design: Unique optical light distribution structure design.
Product Certification: UL, CE, ROHS, UKCA, CB
Working/Storage Temperature: Ta:-25~50°C / 0°C~60°C.
Product application: Signage lighting, Outdoor/indoor lighting, Architectural contour lighting.



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

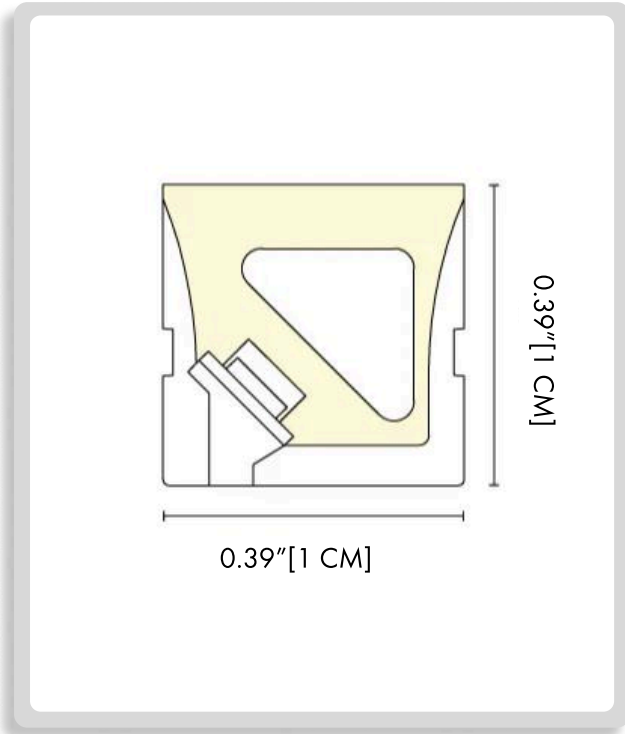

HOW TO ORDER:

CODE:

Example:
CODE: BB-SLWLPX-CL-24V.3D2021.LPX-AS-
NM3D1515GH0-EC-LPX

BB-SLWLPX-
CL-24V.3D2021.LPX-
AS-NM3D1515GH0-
EC-LPX

1 DIMENSIONS:

A) Length - L: 0.39" (1 cm)
B) Height - H: 0.39" (1 cm)

2 LIGHT SOURCE:

-24V.3D2021.LPX

CCT	COLOR RANGE	CRI	INPUT VOLTAGE	RATED CURRENT (A/m)	RATED POWER	MAXIMUM POWER
2700 K	2580-2870K	90	24	0.33 (0.10A/ft)	8 (2.44W/ft)	8.8 (2.68W/ft)
3000 K	2870-3220K					
4000 K	3710-4260K					

LUMENS	STANDARD LENGTH	REMARK
300(91LM/ft) 320(98LM/ft) 340(104LM/ft)	5000mm (16.4ft)	16LED/29.41mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-SLWLCF-CL**

FIXTURE TYPE: _____

PROJECT NAME: _____



HOW TO ORDER:


CODE:

Example:
CODE: BB-SLWLFX-CL-24V.3D2021.LPX-AS-
NM3D1515GH0-EC-LPX


BB-SLWLFX-
CL-24V.3D2021.LPX-
AS-NM3D1515GH0-
EC-LPX

3 ACCESSORIES:

AS-TD-01-LPX



AS-NM3D1515A-1000-LPX




AS-NM3D1515GH0-EC-LPX



AS-NM3D1515M-1000-LPX



AS-NM3D1515M-500-LPX



- LED
- IP67
- IK08
- UV RESISTANT
- SOLVENT RESISTANT
- SALTWATER RESISTANT
- FLAME RESISTANT

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA