



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**NEXIS**  
BB-2401-BL





**BULLARD  
BOLLARDS**  
Think Bullard Think Bullard

**CODE:  
BB-2401-BL**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



**GENERAL INFORMATION:**

The Nexis Bollard from Bullard Outdoor features a sleek cobra-shaped design with integrated LED modules and lens, delivering 10W of power at 85 lm/W. Constructed from durable aluminum with high IP65-rated gaskets, it offers excellent corrosion and weather resistance, making it ideal for parks, pathways, gardens, and villa projects. The bollard supports multiple power supply options, including 1-10V, non-dimmable, DMX512, and RDM. Dimensions are H: 23.62" (60 cm), L: 4.72" (12 cm), and W: 4.65" (11.8 cm). Available CCT options are 2700K, 3000K, 4000K, and 5000K with beam angles of 25°, 40°, or 120° and CRI options of 80 or 90.

**FIXTURE TYPE:**

Bollard

**LIGHTING:**

LED



**VOLTAGE:**

110-277V



**MATERIAL:**

Aluminum

**IP:**

IP 65



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646




991 South Gull Lake Dr  
Richland, MI 49083  
USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

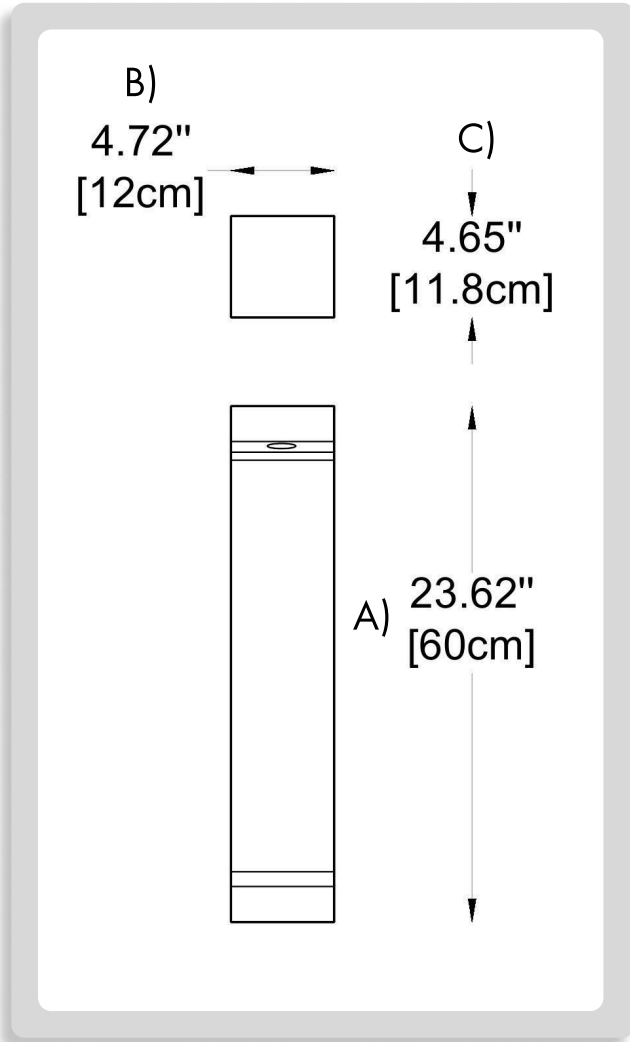

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BB-2401-BL-K30-B40-C80-DIM-CUS

BB-2401-BL-K30-  
B40-C80-DIM-CUS

**1 DIMENSIONS:**

A) Height - H: 23.62" (60 cm)  
B) Length - L: 4.72" (12 cm)  
C) Width - W: 4.65" (11.8 cm)

**2 LIGHT SOURCE:**

LED / 10W / 85 lm/W

**3 CCT:**

-K27 2700K  
-K30 3000K  
-K40 4000K  
-K50 5000K

**4 BEAM ANGLE:**

-B25 25°  
-B40 40°  
-B120 120°

**5 CRI:**

-C80 CRI 80  
-C90 CRI 90

**6 DIMMING OPTIONS:**

-NON NON-Dimmable  
-DIM 1-10V  
-DMX DMX512  
-RDM RDM

**7 FINISH OPTIONS:**

-WH White   
-BL Black   
-CUS Custom on request\*

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA