




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

LUMEXTRA

Recessed Wall Luminaires

Stair / Pathway

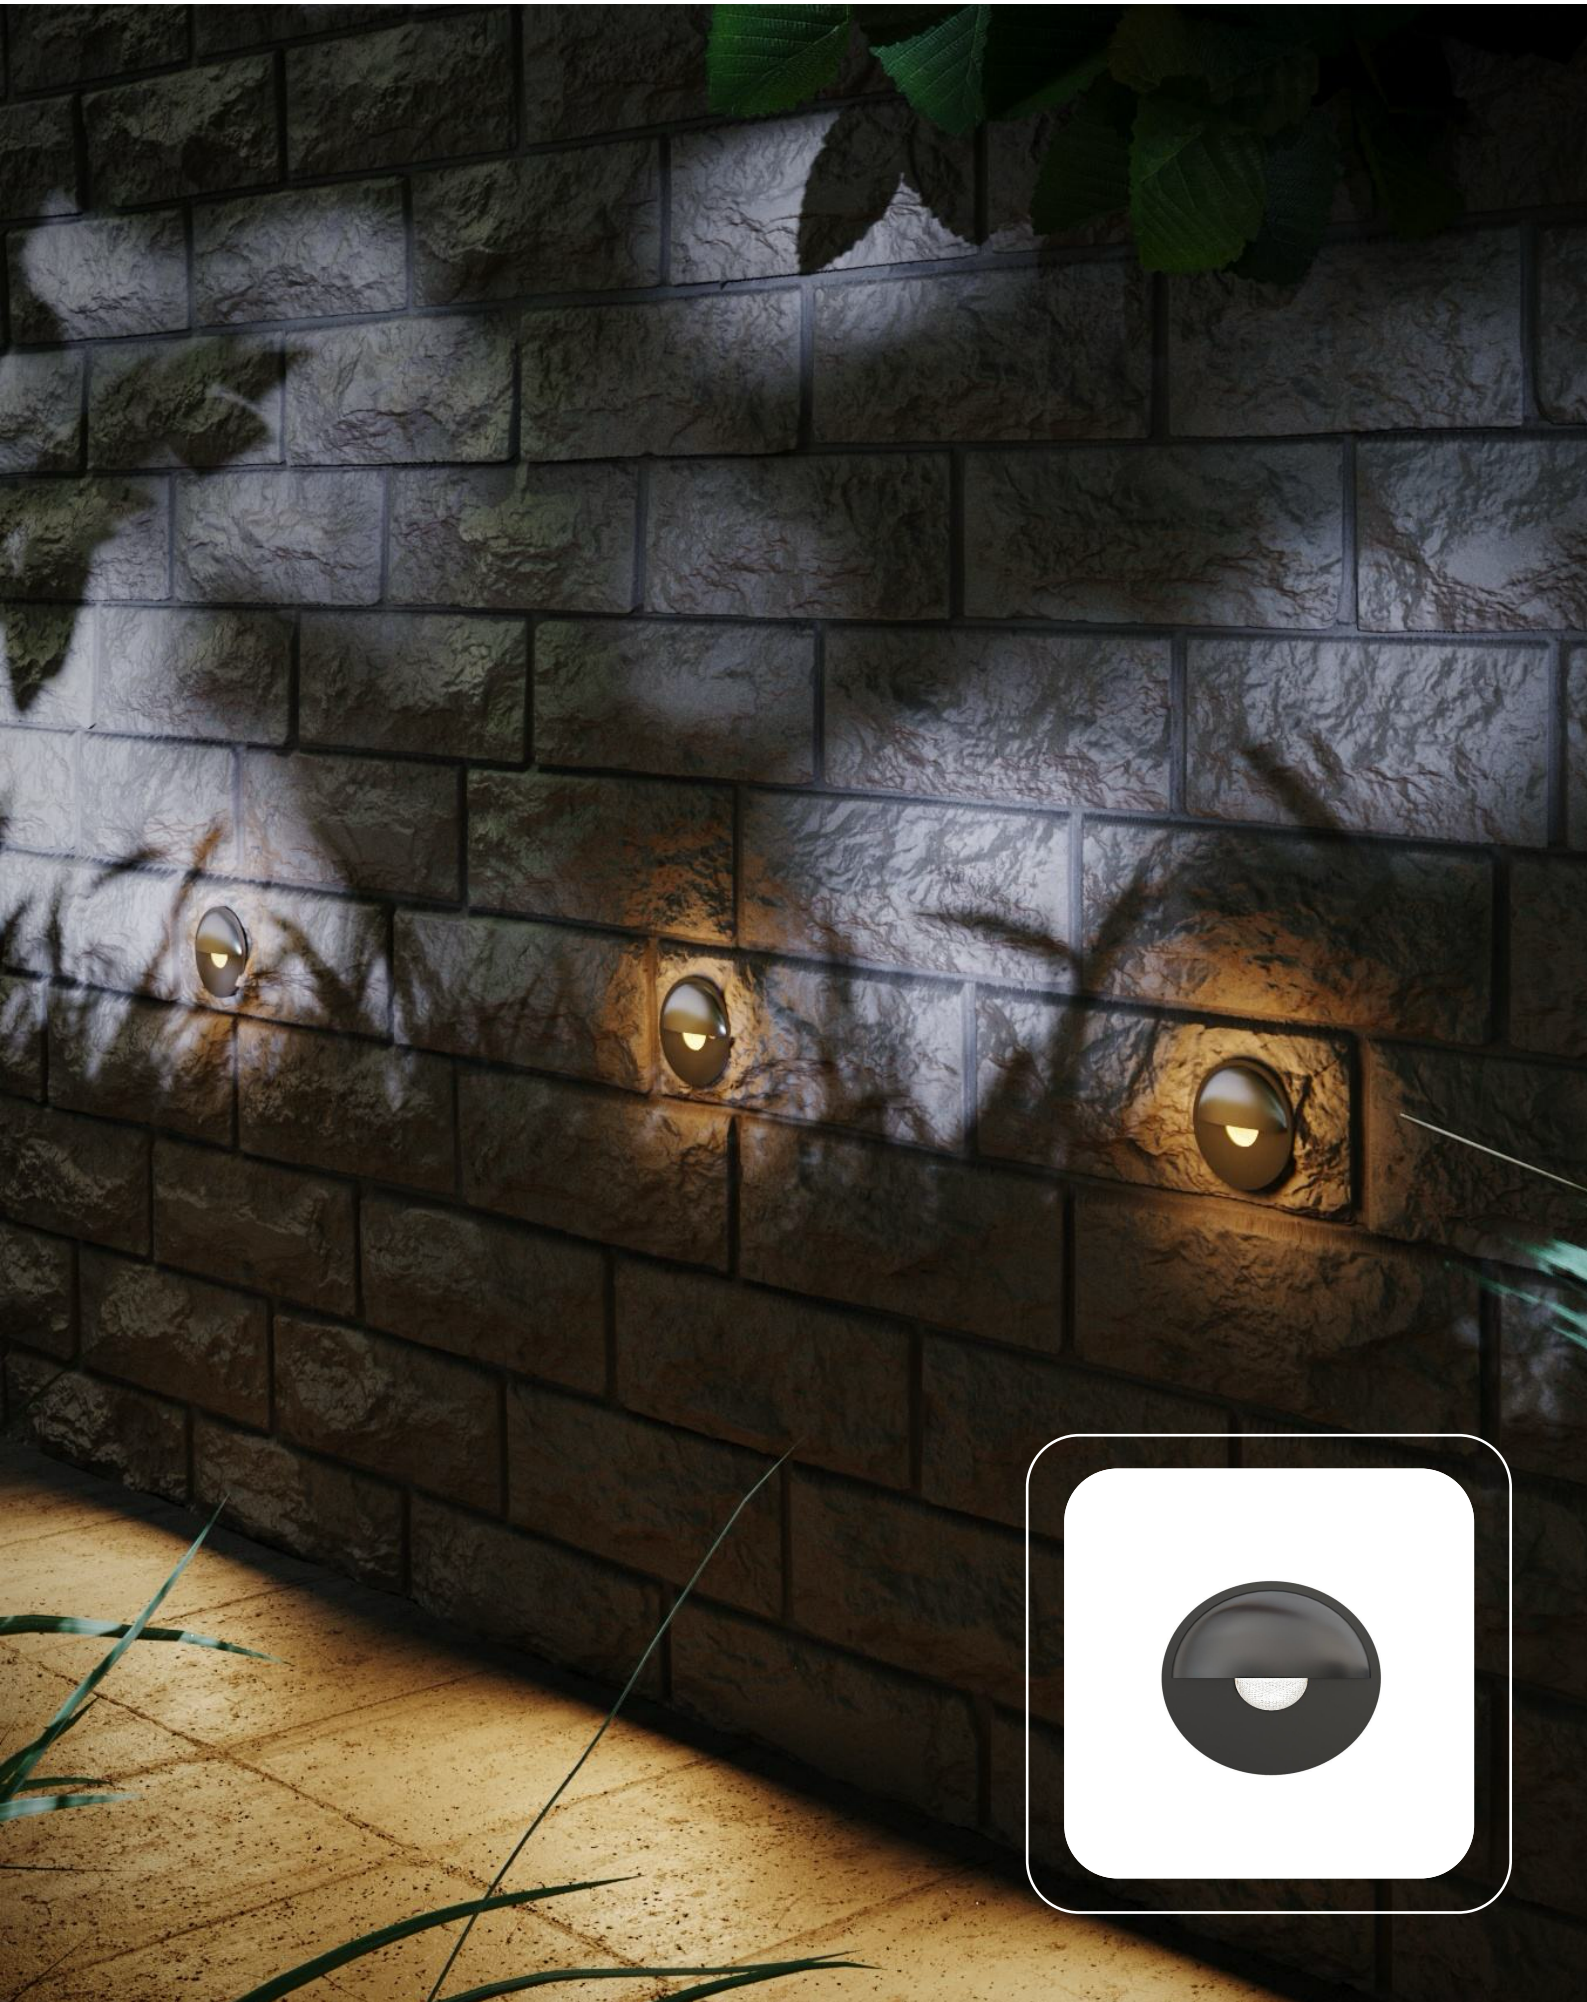



FIXTURE TYPE: _____

PROJECT NAME: _____



*CABLE GLAND - IP67 copper and nicked coated

GENERAL INFORMATION:

The LUMEXTRA Recessed Wall Luminaire is a durable LED fixture for stairways and pathways. Made from die-cast powder-coated aluminum with a tempered glass lens, it operates on 110–277V and offers IP67 and IK10 protection. With a load capacity over 2000 kg, LUMEXTRA ensures reliable, long-lasting performance in Sanded Dark Gray, Sanded Black, or Sanded White finishes.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway

LIGHTING:

LED



VOLTAGE:

110-277V



MATERIAL:

12# Die-casting powder coated aluminum

LENS:

B1XQ0156: Step tempered clear glass.T=4mm
B1XT0157, R1XU0125: Step tempered clear glass.T=8mm

RECESSED SLEEVE:

B1XQ0156: PC/ABS ALLOYS 182#
B1XT0157: PC/ABS ALLOYS 185#
R1XU0125: PC/ABS ALLOYS 184#

LOADING CAPACITY:

>2000kg

IP RATING:

IP 67



IK RATING:

IK 10

FINISHING:

Sanded Dark Gray
Sanded Black
Sanded Silver Gray

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

-B1XQ0156

Ø: 1.65" (4.2 cm) 1.7" (4.4 cm)

1.5"
(3.8 cm)

-B1XT0157

Ø: 2.28" (5.8 cm) 2" (5.3 cm)

1.7"
(4.4 cm)

-R1XU0125

Ø: 2.75" (7 cm) 4.3" (11 cm)

2"
(5.2 cm)

HOW TO ORDER:

CODE:

Example:
CODE: BB-LMX-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BB-LMX-KPG-RWL-
B1XQ0156-K30-
KAP7037-DIM-B44-20

1 MODELS:

CODE -B1XQ0156

DIMENSIONS:

Diameter - Ø: 1.65" (4.2 cm)
Depth - P: 1.7" (4.4 cm)

LIGHT SOURCE:

LED / 1 x 1W / 54 mA / 28 lm / 110-277V / CRI 80

CODE -B1XT0157

DIMENSIONS:

Diameter - Ø: 2.28" (5.8 cm)
Depth - P: 2" (5.3 cm)

LIGHT SOURCE:

LED / 1 x 2W / 108 mA / 60 lm / 110-277V / CRI 80

CODE -R1XU0125

DIMENSIONS:

Diameter - Ø: 2.75" (7 cm)
Depth - P: 4.3" (11 cm)

LIGHT SOURCE:

LED / 1 x 5W / 265 mA / 237 lm / 110-277V / CRI 80

2 CCT OPTIONS:

-K30 3000K
-CUS Custom on request*

3 FINISH OPTIONS:

-KAP7037 Sanded Dark Gray
-RAL 9005 Sanded Black
-RAL9022 Sanded Silver Gray

4 DIMMING OPTIONS:

-DIM 1-10V
-PWM Pulse Width Modulation
-DALI DALI (Digital Addressable Lighting Interface)

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



BULLARD BOLLARDS
Think Bollard Think Bullard

**CODE:
BB-LMX-KPG-RWL**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



*CABLE GLAND - IP67 copper and nicked coated

HOW TO ORDER:

CODE:

Example:
CODE: BB-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BB-LMX-KPG-RWL-
B1XQ0156-K30-
KAP7037-DIM-B44-20

5 MOUNTING SLEEVE CHARACTERISTIC:

available only for
-B1XQ0156 model
-B44-20 20°


available only for
-B1XT0157 model
-B34D-30 30°

available only for
-R1XU0125 model
-R7-18 18°
-R7-24 24°
-R7-32 32°


6 RECESSED SLEEVE: (included)



7 DIAGRAM OF INSTRUCTION:

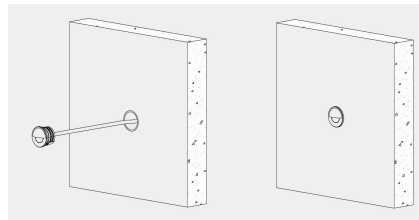

8 PHOTOMETRIC INFO:

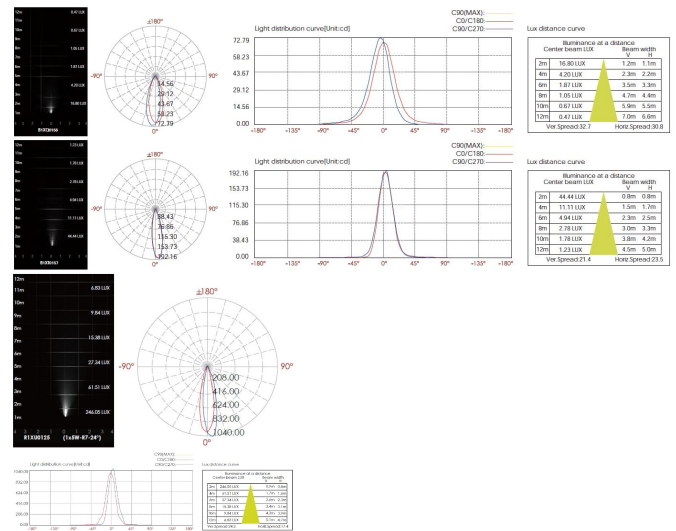

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA