



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

BANE
Surface Mounted Wall Luminaires
Soft Light





**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-BN-KPG-SMW**

FIXTURE TYPE: _____

PROJECT NAME: _____



The BANE Surface Mounted Wall Luminaires – Soft Light combines contemporary styling with warm, diffused illumination perfect for exterior environments. Constructed from die-cast aluminum with a resilient powder-coated finish, it offers durability and long-term resistance to corrosion and weathering. Its PMMA lens (Ø=76mm) ensures soft, even light distribution, powered by efficient LED technology with a CRI of 80 for true color rendering. Operating on a universal 110–277V input, the BANE fixture features IP65 weather protection and IK08 impact resistance, making it ideal for entrances, pathways, and architectural walls. Available in sanded bronze, dark gray, and black finishes

FIXTURE TYPE:

Surface Mounted Wall Luminaires - Soft Light

LIGHTING

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Die-casting powder coated aluminum

LENS:

PMMA Ø=76mm

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 08

FINISHING:

Sanded Bronze
Sanded Dark Gray
Sanded Black
Sanded White

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA



CODE:
BB-BN-KPG-SMW

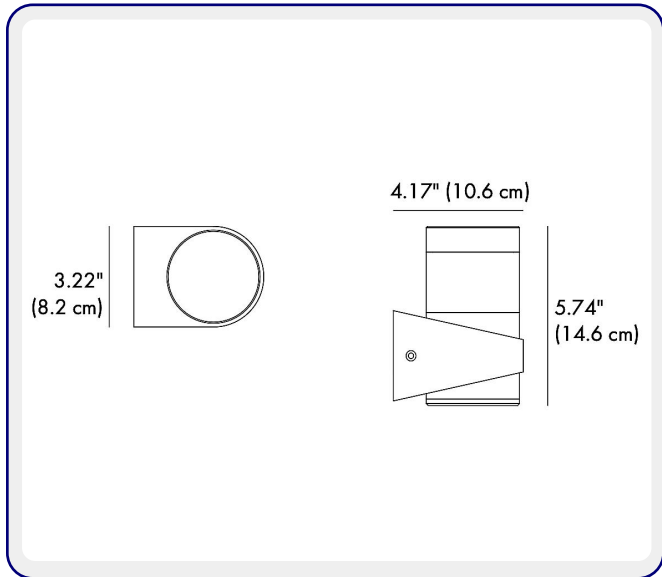


Figure 10 displays the light distribution curves for the C180 beam. The top-down view shows the beam's light distribution at a distance of 100 feet, with a central beam diameter of 16.78 feet. The side view shows the beam's light distribution at a distance of 100 feet, with a central beam diameter of 16.78 feet. The table below provides the beam data for the C180 beam.

Beam	Beam Type	Beam Diameter (ft)	Beam Length (ft)	Beam Weight (lb)	Beam Material
C180	Beam	16.78	100	100	Aluminum



USA

Updated 02/27/2026