



**BULLARD
BOLLARDS**
Think Bollard Think Bullard


BUNNY GROUND SQ (RECESSED WALL LUMINAIRES)



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



GENERAL INFORMATION:

The Bunny Ground AS SQ is a compact recessed wall light designed for step and pathway illumination in architectural environments. Featuring a durable stainless steel AISI 316L housing and tempered glass diffuser, this LED fixture provides soft, asymmetrical wall-washer lighting while maintaining high visual comfort. With an IP66 rating, silicone gaskets, and a wide input voltage range (110–277V), it is ideal for both indoor and outdoor installations where reliability, minimal design, and long-lasting performance are required.

FIXTURE TYPE:

Wall Recessed

LIGHTING:

LED



INPUT VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L

GASKETS:

Silicone gaskets

CUTOUT SHAPE:

Round

DRIVER POSITION:

Remote

CRI:

>90

IP RATING:

IP66

APPLINCE CLASS:

III



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
 www.bullardbollards.com
 1-877-964-4646




991 South Gull Lake Dr
 Richland, MI 49083
 USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



CONTROL:

Dim based on driver

BEAM ANGLE / LIGHT DISTRIBUTION / BEAM DIRECTIONABILITY:

89° x 88° x 45° Asymmetric flood (wall washer) Fixed optics

CABLE ENTRY:

Cable gland PE-LD 5.2mm

CABLE TYPE:

FR5FOEM7-AD8 2x0.5mm²

CORD LENGTH:

50 cm

DIFFUSER MATERIAL:

Tempered glass

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

- High visual comfort
- Wide range of finishes
- Functional design
- Minimal design
- Reduced overhang
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- * upon request previous specific components and test

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA




FIXTURE TYPE: _____

PROJECT NAME: _____


-32

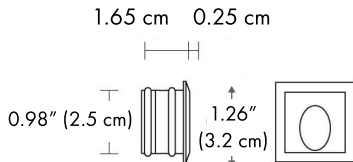

-45

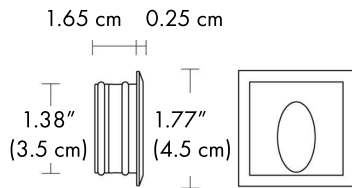

-55

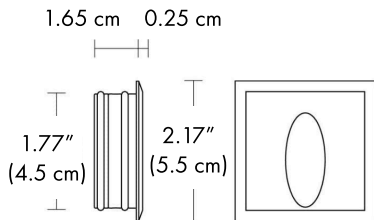

HOW TO ORDER:

CODE:

Example:
CODE: BB-1439.00BAXO-GH-32-L1-350-DIM

BB-1439.00BAXO
-GH-32-L1-350-DIM

1 MODELS:

-32
Width / Length - W/L: 1.26" (3.2 cm)

-45
Width / Length - W/L: 1.77" (4.5 cm)

-55
Width / Length - W/L: 2.17" (5.5 cm)

2 LIGHT SOURCE:

-L1 LED / 1 x 1W / 3000K / 1 x 122 lm
-L2 LED / 1 x 1W / 4000K / 1 x 130 lm

3 CONTROL GEAR/OPERATION RANGE:

-24V 24 V DC
-350 350 mA

4 FINISH OPTIONS:

Stainless steel

5 DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

6 ACCESSORIES:

-AC205-IP66
IP66 remote power supply box



-AC297
Wall recessed rough-in housing 503



-AC212
Drywall Springs Segno/Point



-AC612
Rough-in housing 50x105



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA