



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**FLEX SKYLINE 360 R13**  
BB-FLXS360R13-CL





FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



**GENERAL INFORMATION:**

The FLEX Skyline 360 it has a flexible round-profile LED neon system delivering uniform 360° omnidirectional illumination for architectural and decorative lighting. Engineered with high-transmittance silicone to provide smooth, dot-free light output with consistent brightness from every viewing angle. The integrated internal support structure allows stable suspended runs and creative three-dimensional lighting forms. Designed for indoor and semi-outdoor applications, the system features durable silicone housing with IP65 protection and is available in white color temperatures including 2300K, 2700K, 3000K, and 4000K.

**FIXTURE TYPE:**

360 LED Neon Flexible

**MATERIAL:**

High Purity Silica Gel

**IP RATING:**

IP65

**IP65**

**IK RATING:**

IK08

**IK08**

**WARRANTY:**

LED lighting products are warranted for 5 years.

**DRIVER POSITION:**

Remote

**MAIN FEATURES:**

Functional and minimalistic design  
Skin-friendly surface treatment  
Operating Temperature: -13°F to +131°F.

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646




991 South Gull Lake Dr  
Richland, MI 49083  
USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

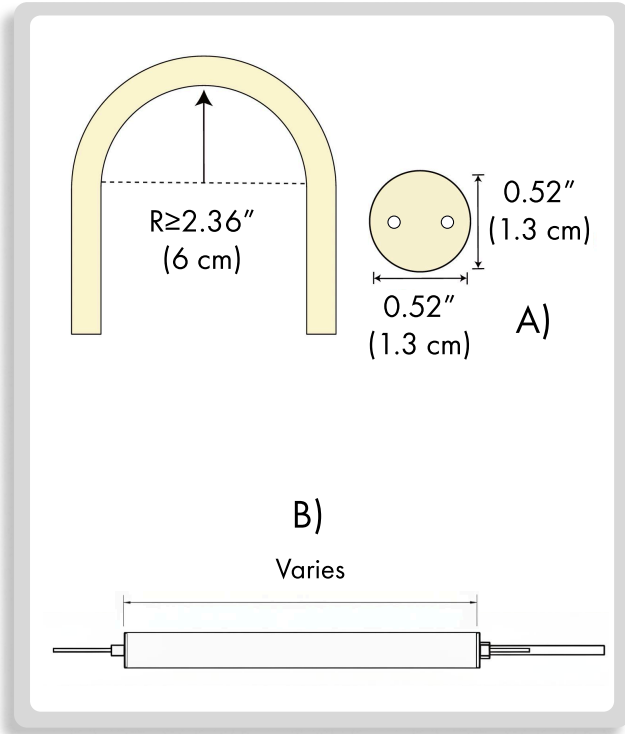

**HOW TO ORDER:**

**CODE:**

**Example:**  
CODE: BB-FLXS360R13-CL-LS1-AS-  
NNR13SA-182-402-02-000000-00001-402-02-000000-  
00013

BB-FLXS360R13-CL-  
LS1-AS-  
NNR13SA-182-402-0  
2-000000-00001-402  
-02-000000-00013

**1 DIMENSIONS:**

A) Diameter - Ø: 0.52" (1.3 cm)  
B) Length - L: Varies

**2 LIGHT SOURCE:**

CODE	INPUT VOLTAGE	CCT	RATED POWER	CRI	LENGTH	LUMENS	CUTTING
-LS1	24VDC	2300 K	13W (3.96W/ft)	90	16.4ft	585 (178/ft)	No cutting 14LED/0.98"
-LS2		2700 K				675 (206/ft)	
-LS3		3000 K				700 (213/ft)	
-LS4		4300 K				700 (213/ft)	
-LSS1	48VDC	2300 K	13W (3.96W/ft)	90	32.8ft	585 (178/ft)	No cutting 28LED/1.97"
-LSS2		2700 K				675 (206/ft)	
-LSS3		3000 K				700 (213/ft)	
-LSS4		4300 K				700 (213/ft)	

**3 ACCESSORIES:**


**-AS-NNR13SA-182**

Double end suspension kit (white)  
φ90mm \* L182mm with screws




**-AS-NNR13SA3-182**

Double end suspension kit (black)  
φ90mm \* L182mm with screws

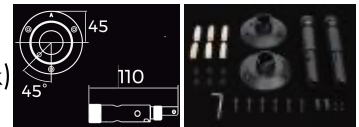

**-AS-NNR13DCX-XX**

Silicone plug and tail plug  
φ13mm \* L13.5mm

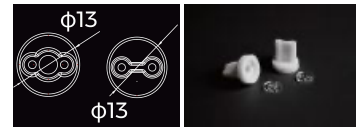

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

**HOW TO ORDER:**

**CODE:**

**Example:**  
CODE: BB-FLXS360R13-CL-LS1-AS-  
NNR13SA-182-402-02-000000-00001-402-02-000000-  
00013

BB-FLXS360R13-CL-  
LS1-AS-  
NNR13SA-182-402-0  
2-000000-00001-402  
-02-000000-00013

**5 SYSTEM CONTROL:**

**-402-02-000000-00001**

Monochrome Remote Control  
R6-1  
Operating voltage: 3VDC(Battery CR2032)  
Operating frequency: 2.4GHz  
Remote control distance: 30m  
Operating temperature: -30°C-55°C  
Size:L107\*W58.5\*H9(mm)



**-402-02-000000-00013**

Monochrome Control Receiver  
CR1-GBA  
Input voltage: 12-48VDC  
Maximum load current: 15A\* 1CH, Max15A@12/24V  
10A \* 1CH, Max10A@36/48V  
Maximum load power: 15A\* 1CH, Max15A@12/24V  
10A \* 1CH, Max10A@36/48V  
Operating temperature: -30°C-55°C  
Size: L175\*W45\*H27(mm)



**-402-0-000000-00013**

Knob panel controller used for dimming to warm  
CP1-GBB  
Input voltage: 12-24VDC  
Input current: 6A\* 1CH  
Operating temperature: -30°C-55°C  
Size: L86\*W86\*H33(mm)



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA