



**BULLARD
BOLLARDS**
Think Bollard Think Bullard


BRILL
Recessed Wall Luminaires
Stair / Pathway





FIXTURE TYPE: _____

PROJECT NAME: _____

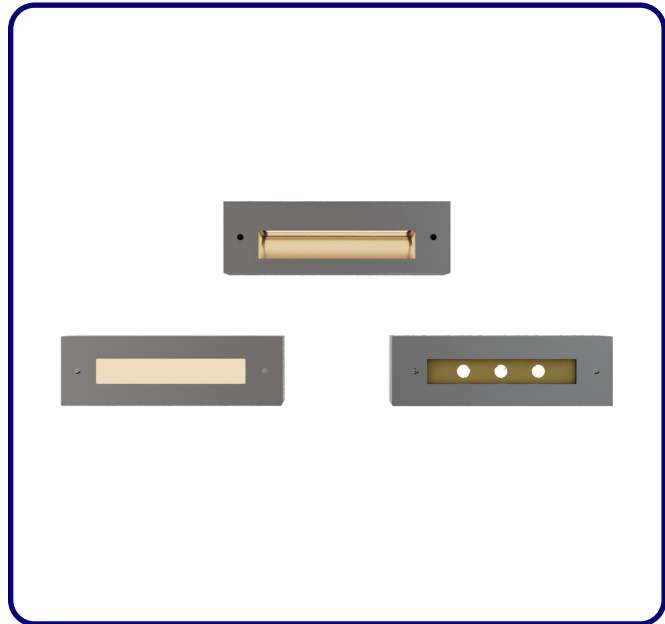

*CABLE GLAND - IP68 PG-9 PA66

GENERAL INFORMATION:

The BRILL Recessed Wall Luminaire is a versatile LED fixture designed for stairways and pathways. Constructed from die-cast dark gray powder-coated aluminum, it operates on 110–277V and features tempered or high-transparency glass lenses for uniform illumination. With IP65, plus an IP68 cable gland for added protection, BRILL ensures durability and performance in outdoor environments.

FIXTURE TYPE:

Recessed Wall Luminaires - Stair/Pathway

LIGHTING:

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

12# Die-casting dark grey powder coated aluminum

COVER:

Stainless Steel 316L#

LENS:

C1FL0357: Step-grinding and tempered high transparency glass.T=8mm
D1FL1014: Tempered frosted step glass.T=8mm, white prin
D1FL1234: UVstop & Fireproof PC T=4mm

RECESSED SLEEVE:

PC/ABS ALLOYS 076#

IP RATING:

IP 65

IP65

IK RATING:

IK 08 / IK 09 / IK 10

FINISHING:

Sanded Dark Gray
Sanded Black
Sanded Silver Gray

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

HOW TO ORDER:

CODE:

Example:
CODE: BB-BRL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BB-BRL-KPG-RWL-
C1FL0357-K30-
KAP7037-DIM

1

MODELS:

CODE -C1FL0357

DIMENSIONS:

Length - L: 7.68" (195 cm)
Height - H: 2.5" (6.3 cm)
Depth - P: 2.68" (6.8 cm)

LIGHT SOURCE:

LED / 3 x 2W / 217 mA / 400 lm / CRI 80 / 35°x 45° / IK 08

CODE -D1FL1014

DIMENSIONS:

Length - L: 7.68" (195 cm)
Height - H: 2.5" (6.3 cm)
Depth - P: 2.68" (6.8 cm)

LIGHT SOURCE:

LED / 10 x 0.2W / 114 mA / 50 lm / CRI 80 / IK 09

CODE -D1FL1234

DIMENSIONS:

Length - L: 7.68" (195 cm)
Height - H: 2.5" (6.3 cm)
Depth - P: 2.68" (6.8 cm)

LIGHT SOURCE:

LED / 12 x 0.2W / 52 mA / 70 lm / CRI 80 / IK 10

2


CCT OPTIONS:

-K30 3000K
-CUS Custom on request*

3

FINISH OPTIONS:

-KAP7037 Sanded Dark Gray
-RAL 9005 Sanded Black
-RAL9022 Sanded Silver Gray

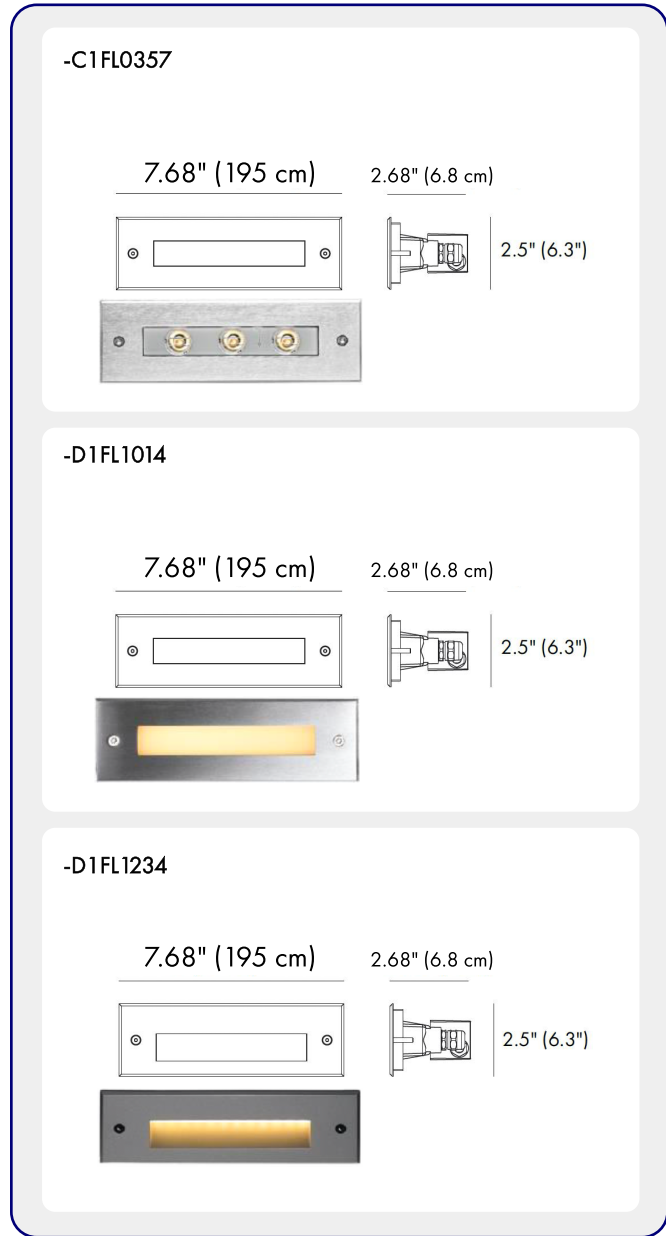

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

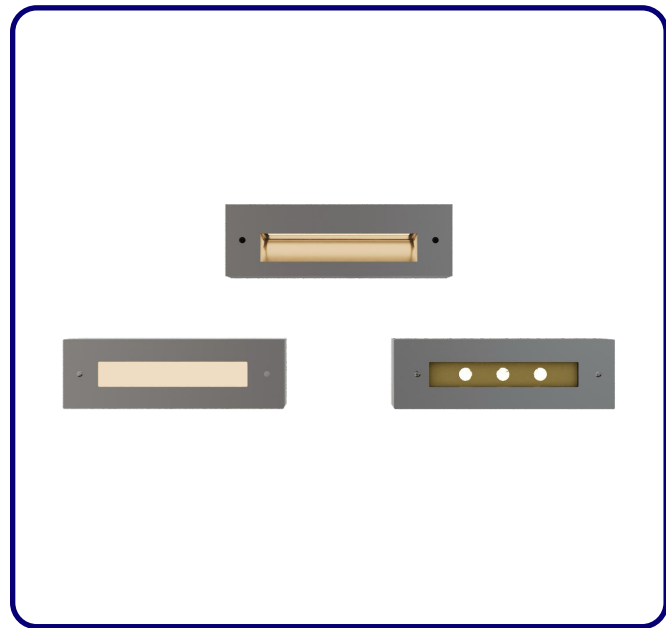

*CABLE GLAND - IP68 PG-9 PA66

HOW TO ORDER:

CODE:


Example:
CODE: BB-BRL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BB-BRL-KPG-RWL-
C1FL0357-K30-
KAP7037-DIM


4 DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)


5 RECESSED SLEEVE: (included)

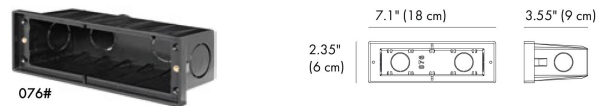


6 RECESSED SLEEVE CHARACTERISTIC:

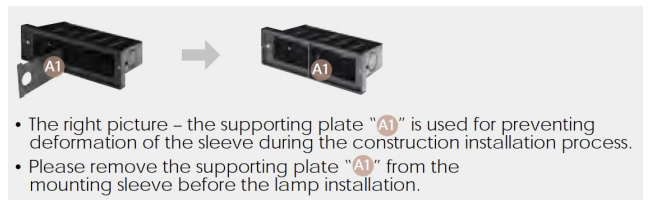

7 DIAGRAM OF INSTRUCTION:

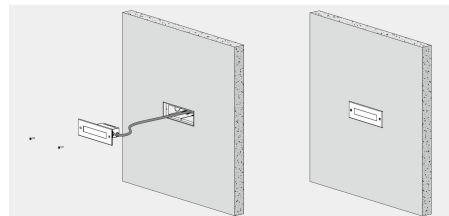

8 PHOTOMETRIC INFO:

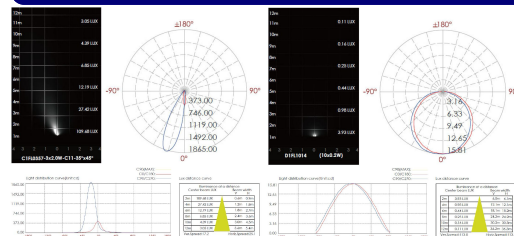

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA