



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

SLYRA
BB-1401-BL





**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-1401-BL**

FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The Slyra Bollard from the Bullard Outdoor range features a classic design and stands at a height of 27.56" (70 cm). It operates at a power rating of 6W and is compatible with input voltages of 110-277V. Constructed from pure aluminum and gasket materials, it boasts a high IP65 protection class, ensuring resistance to corrosion and compression. This bollard light is ideal for garden lighting, parks, pathways, and villa projects, providing low energy consumption and easy installation. The dimensions of the Lynor are Ø: 3.54" (9 cm), and it offers an LED light source with an efficiency of 85 lm/W. Available in a range of correlated color temperatures (CCT) including 2700K, 3000K, 4000K, and 5000K, it has a beam angle of 120° and a color rendering index (CRI) of 80 or 90.

FIXTURE TYPE:

Bollard

LIGHTING:

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Aluminum + PC

IP:

IP 65

IP65

BEAM ANGLE:

120°

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA



FIXTURE TYPE: _____

PROJECT NAME: _____

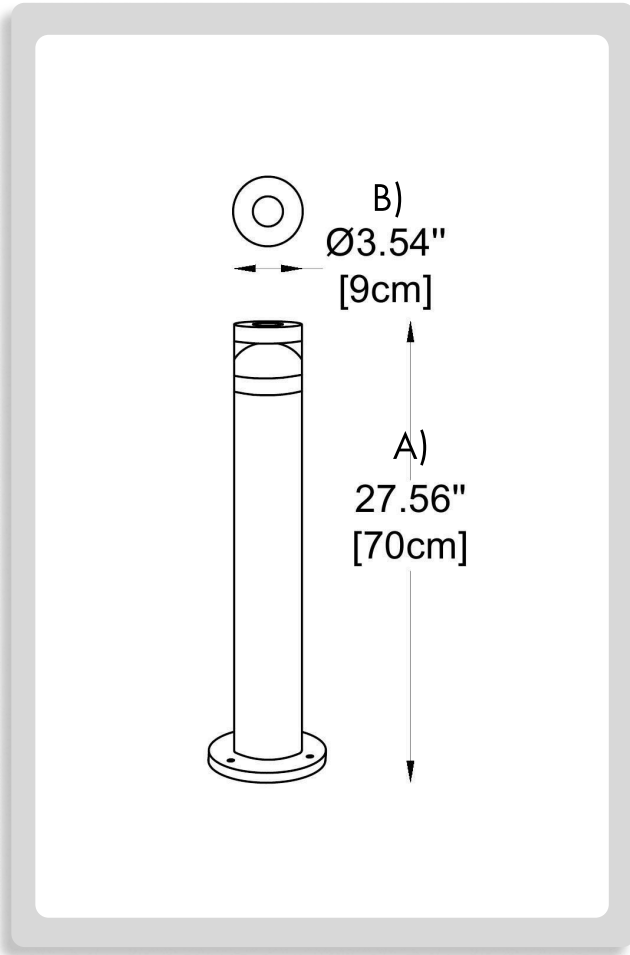

HOW TO ORDER:

CODE:

Example:
CODE: BB-1401-BL-K30-C80-DIM-CUS

BB-1401-BL-K30-C80-DIM-CUS

1 DIMENSIONS:

A) Height - H: 27.56" (70 cm)
B) Diameter - Ø: 3.54" (9 cm)

2 LIGHT SOURCE:

LED / 6W / 85 lm/W

4 CCT:

-K27 2700K
-K30 3000K
-K40 4000K
-K50 5000K

5 CRI:

-C80 CRI 80
-C90 CRI 90

6 DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 1-10V
-DMX DMX512
-RDM RDM

7 FINISH OPTIONS:

-WH White
-BL Black
-CUS Custom on request*

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA