




**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard


**LUNARA FLAT RD  
(CEILING RECESSED)**

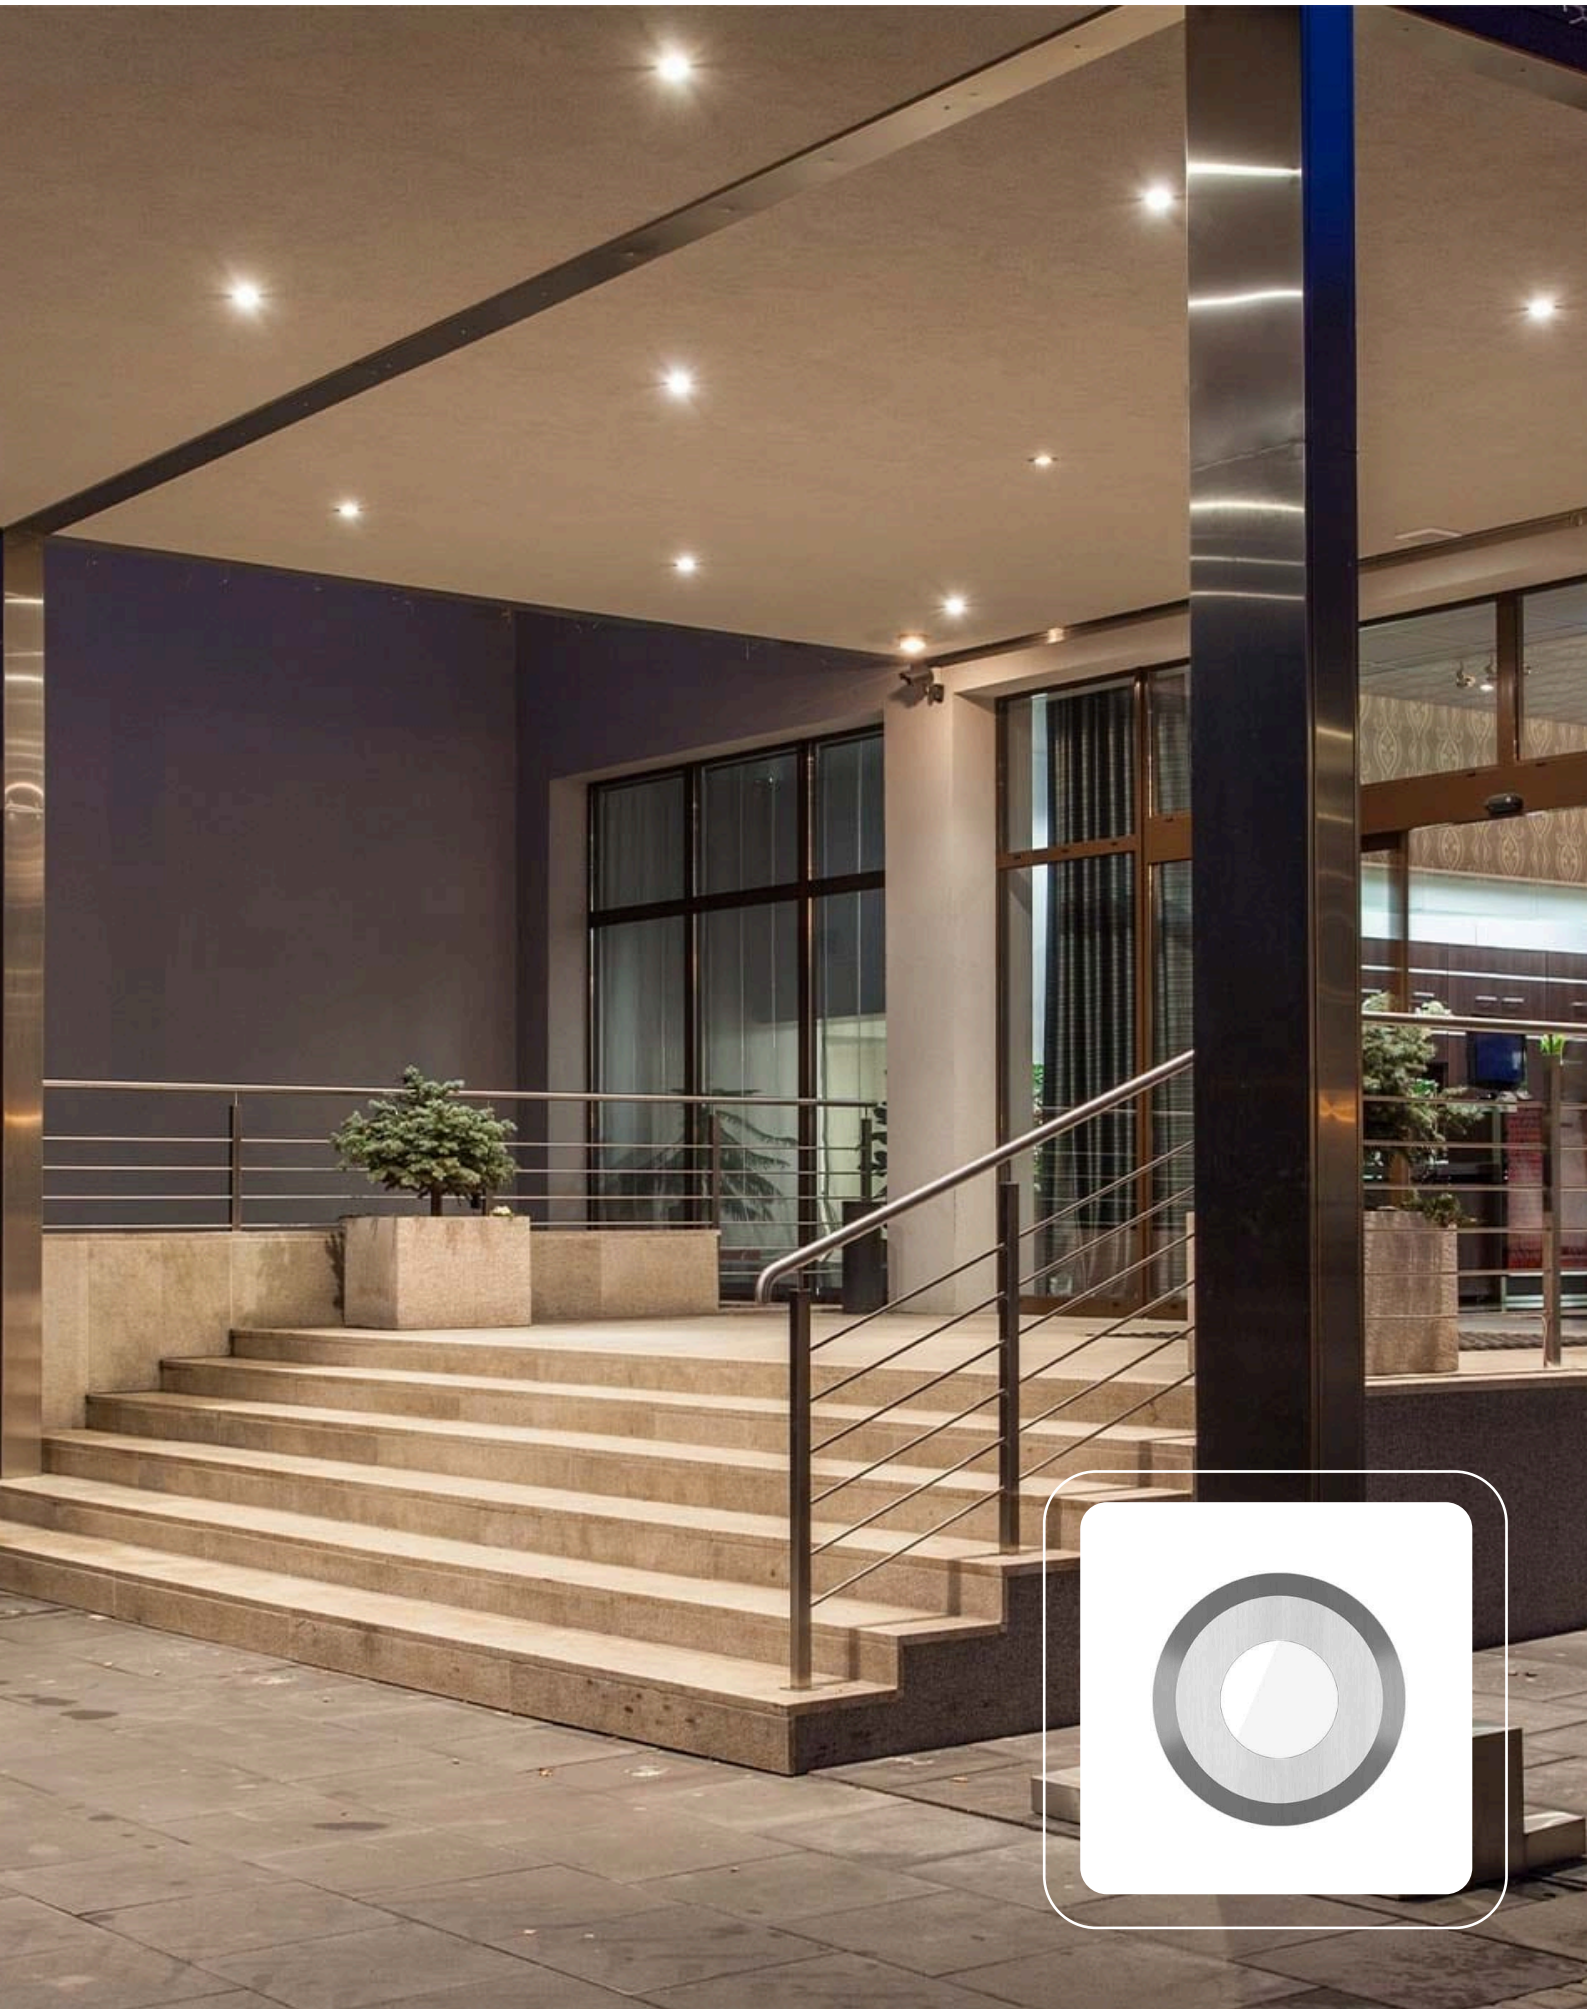

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

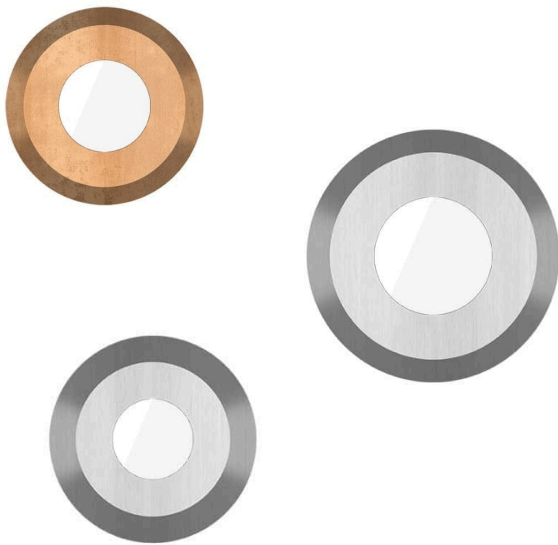

**GENERAL INFORMATION:**

The LUNARA FLAT RD recessed ceiling luminaire is a compact and elegant LED fixture designed to provide soft, uniform illumination with a minimalist architectural look. Crafted from durable stainless steel and extruded aluminum with an anodized finish, it offers excellent resistance to oxidation and long-term performance in both indoor and covered outdoor environments. The fixture features high-efficiency LED technology combined with a tempered glass diffuser to deliver comfortable, wide light distribution. With an IP68 rating, silicone gaskets, and a remote driver configuration, the BB-1030 ensures reliable operation in demanding conditions while offering flexible installation, multiple size options, and dimming capabilities for modern architectural lighting applications.

**FIXTURE TYPE:**

Ceiling Recessed

**LIGHTING:**

LED



**INPUT VOLTAGE:**

110-277V



**MATERIAL:**

Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation

**GASKETS:**

Silicone gaskets

**FINISH AND PROTECTION:**

Anodizing treatment

**CUTOUT SHAPE:**

Round

**DRIVER POSITION:**

Remote

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
 www.bullardbollards.com  
 1-877-964-4646




991 South Gull Lake Dr  
 Richland, MI 49083  
 USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

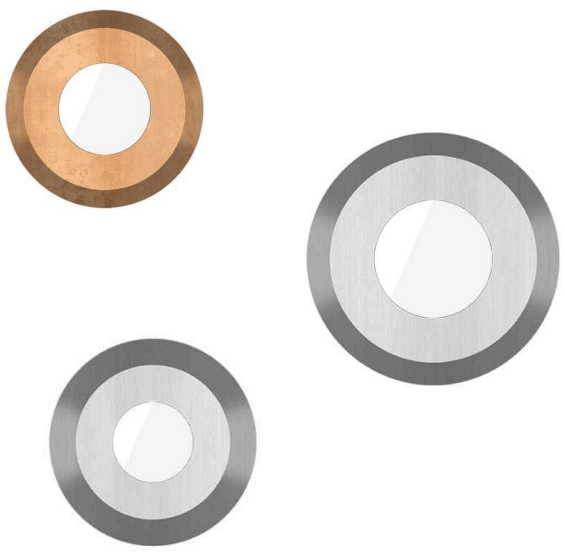

**CRI:**

>90

**IP RATING:**

IP68



**APPLIANCE CLASS:**

III



**CONTROL:**

Dim based on driver

**BEAM ANGLE / LIGHT DISTRIBUTION / BEAM DIRECTIONABILITY:**

115° Symmetrical wide beam (45° - 125°) Fixed optics

**CABLE ENTRY:**

Cable gland PE-LD 5.2mm

**CABLE TYPE:**

FR5FOEM7-AD8 2x0.5mm2

**CORD LENGTH:**

50 cm

**DIFFUSER MATERIAL:**

Tempered glass 5mm

**WARRANTY:**

LED lighting products are warranted for 5 years.

**MAIN FEATURES:**

- High visual comfort
- Wide range of finishes
- Functional design
- Minimal design
- Reduced overhang
- Operating Temperature: 253.15 K ÷ 308.15 K (-20 °C ÷ +35 °C)
- Increased temperature to 323.15 K (50°C)
- \* upon request previous specific components and test

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
 www.bullardbollards.com  
 1-877-964-4646




991 South Gull Lake Dr  
 Richland, MI 49083  
 USA




FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_


**-32**

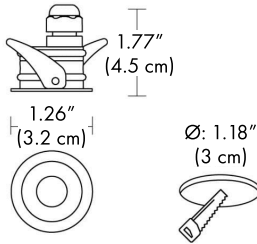

**-45**

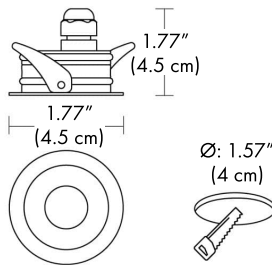

**-55**

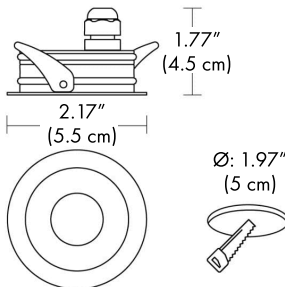

**HOW TO ORDER:**

**CODE:**

Example:  
CODE:  
BB-1030.00BAXW-GH-32-L2-350-68-DIM-AC205-IP66

BB-1030.00BAXW  
-GH-32-L2-350-68  
-DIM-AC205-IP66

**1 MODELS:**

**-32**

Diameter - Ø: 1.26" (3.2 cm)

**-45**

Diameter - Ø: 1.77" (4.5 cm)

**-55**

Diameter - Ø: 2.17" (5.5 cm)

**2 LIGHT SOURCE:**

**-L1** LED / 1 x 1W / 3000K / 1 x 105 lm

**-L2** LED / 1 x 1W / 4000K / 1 x 116 lm

**-BL** LED / 1 x 1W BLUE / 1 x 40 lm

**3 CONTROL GEAR/OPERATION RANGE:**

**-24V** 24 V DC

**-350** 350 mA

**4 FINISH OPTIONS:**

**-15** Stainless steel

**-68** Natural bronze

**5 DIMMING OPTIONS:**

**-NON** NON-Dimmable

**-DIM** 0-10V

**-CAS** Casambi

**-DAL** Dali

**6 ACSESSORIES:**

**-AC205-IP66**

IP66 remote power supply box



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA