



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

BUNNY LINE 300 (INGROUND LUMINAIRES)







**BULLARD
BOLLARDS**
Think Bullard Think Bullard

CODE:
BB-001538.LVFTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

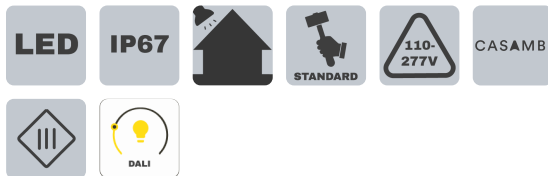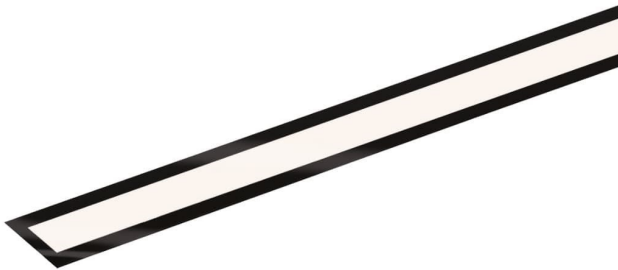

GENERAL INFORMATION:

The Bunny Line 300 is a compact, high-performance in-ground linear luminaire designed to deliver precise architectural illumination in exterior and interior applications. Engineered with a corrosion-resistant extruded aluminum housing, stainless steel hardware, silicone gaskets, and an 8mm tempered glass diffuser, it achieves an IP67 rating for long-term durability in demanding environments. Operating on 24V DC with a remote driver, it offers multiple beam distributions—including symmetric medium flood and 2-axis asymmetric options—along with 3000K and 4000K color temperatures and outputs tailored for accent and wall-grazing effects. With a CRI >90, anti-UV technopolymer optics, and dimming options including 0–10V, DALI, and Casambi, the Bunny Line 300 provides exceptional visual comfort, design flexibility, and reliable performance, making it ideal for step lighting, façade accents, and refined architectural detailing.

LIGHTING:

LED

LED

VOLTAGE:

110-277V



GASKETS:

Silicone gaskets

FIXTURE TYPE:

Inground Luminaires

MATERIAL:

Extruded aluminum EN AW-6060 T5 high resistance to oxidation,
Die-cast aluminum EN AB 44100 highly resistant to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent
lubricating solution

DIFFUSER MATERIAL:

Tempered glass 8mm

IP RATING:

IP 67

IP67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 02/18/2026




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

CODE:
BB-001538.LVFTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

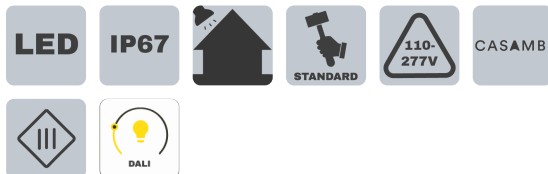

APPLINCE CLASS:

|||

OPERATION RANGE:

24 V DC

DRIVER POSITION:

Remote

CRI:

>90

CABLE ENTRY / CABLE TYPE:

Brass cable gland M12 Ø 3.5/7 mm / FR5FOEM7-AD8 2x0.5mm2

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

28° - Symmetrical medium flood (15 ° - 45 °)

39° x 19° - 2 Axis symmetrical

69° x 139° - 2 Axis symmetrical

BEAM DIRECTIONABILITY:

Fixed optics

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes

Functional design / Minimal design

Shock resistant / Operating Temperature: -22°F~122°F

FINISH OPTIONS:

Glass

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

CODE:
BB-001538.LVFTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

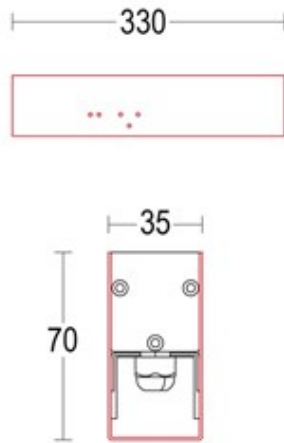

LED

IP67



CASAMBI



HOW TO ORDER:

CODE:

Example:
CODE: BB-001538.LVFTTUNEL-IL-GH-
B69-139-1-DIM-AC285

BB-001538.LVFTTU
NEL-IL-GH-B69-
139-1-DIM-AC285

1

MODELS:

- A) Recessed depth - Ø: 2.76" (7 cm)
B) Length - L: 12.99" (33 cm)
C) Width - W: 1.38" (3.5 cm)

2

LIGHT SOURCE:

CODE **BEAM ANGLE** | **WATTAGE** | **KELVINS** | **LUMENS**

-B69-139-1	69°x139	1 x 3.63 W / 3000 K / 1 x 433 lm	24 V DC
-B69-139-2		1 x 6 W / 3000 K / 1 x 642 lm	24 V DC
-B69-139-3		1 x 3.63 W / 4000 K / 1 x 476 lm	24 V DC
-B69-139-4		1 x 6 W / 4000 K / 1 x 664 lm	24 V DC
-B39-19-1	39°x19°	1 x 9.5W / 2700-6500K / 1 x 1019 lm	24 V DC
-B39-19-2		1 x 9 W / 3000 K / 1 x 876 lm	24 V DC
-B39-19-3		1 x 9 W / 4000 K / 1 x 972 lm	24 V DC
-B28-1	28°	1 x 9 W / 3000 K / 1 x 876 lm	24 V DC
-B28-2		1 x 9 W / 4000 K / 1 x 972 lm	24 V DC

3

DIMMING OPTIONS:

- NON** NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-001538.LVFTTUNEL-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

**Example:
CODE: BB-001538.LVFTTUNEL-IL-GH-
B69-139-1-DIM-AC285**

BB-001538.LVFTTU
NEL-IL-GH-B69-
139-1-DIM-AC285

4

ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC279

IP 68 connector for through wiring 4P




-AC333

Rough-in housing 330 mm



-AC551

Extraction tool Traccia



-AC285

FOR 28° / 39°x19°

Anti glare louver 300mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 02/18/2026