



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CORE
SPOTLIGHT**





**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-CR-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI



GENERAL INFORMATION:

The Core Spotlight is a compact and versatile outdoor LED luminaire designed for precise accent and architectural lighting applications. Constructed from high-resistance extruded aluminum with stainless steel components, it delivers long-lasting performance with an IP67 rating for reliable operation in demanding outdoor environments. The adjustable head allows accurate beam aiming, with 18° or 41° beam options and multiple lumen packages available in 3000K or 4000K color temperatures, all providing CRI >80 for clear, comfortable illumination. With remote driver configuration, multiple dimming options, and a wide range of finishes and accessories, the Core Spotlight offers a clean, minimalist design that integrates seamlessly into landscape, façade, and pathway lighting projects.

FIXTURE TYPE:

Spot Lights

LIGHTING:

LED

GASKETS:

Silicone gaskets

APPLICATION FIELD:

Series of spot lights to be mounted on floor, wall, spike, tree with belt system or on a pole system.

VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L

Extruded aluminum EN AW-6063 T5 high resistance to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 5mm

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-CR-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI



IP RATING:

IP 67

IP67

APPLINCE CLASS:

|||

DRIVER POSITION:

Remote

CRI:

>80

CONTROL GEAR TYPE:

Electronic

CABLE ENTRY:

Brass cable gland M12 Ø 3.5/7 mm

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

18° - Symmetrical medium flood (15 ° - 45 °)

41° - Symmetrical medium flood (15 ° - 45 °)

BEAM DIRECTIONABILITY:

Adjustable

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes

Functional design / Minimal design

Shock resistant

Operating Temperature: -22 °F~122 °F

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-CR-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

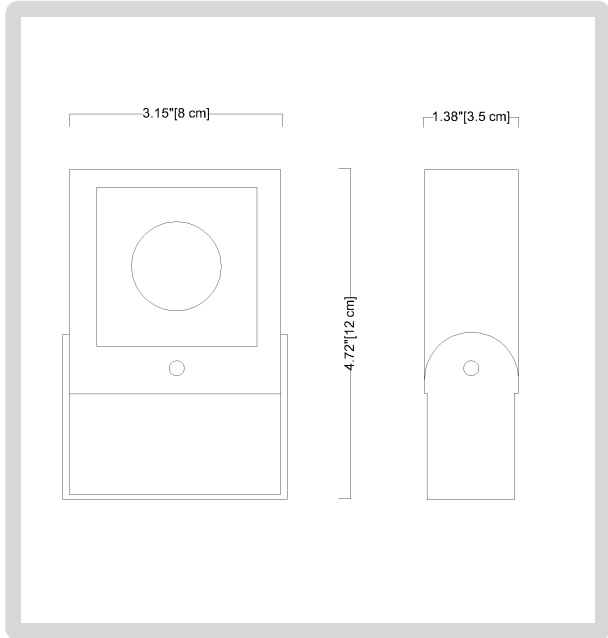

HOW TO ORDER:

CODE:

Example:

CODE:

BB-CR-SP-GH-B18-1-DIM-62-AC204

BB-CR-SP-GH-
B18-1-DIM-62-
AC204

1

DIMENSIONS:

A) Width - W: 3.15" (8 cm)
B) Length - L: 1.38" (3.5 cm)
C) Height - H: 4.72" (12 cm)

2

LIGHT SOURCE:

CODE BEAM ANGLE | WATTAGE | KELVINS | LUMENS

-B18-1	18°	1 x 6 W	3000 K	1 x 540 lm	110-277V
-B18-2		1 x 9 W	3000 K	1 x 1173 lm	500 mA
-B18-3		1 x 9 W	3000 K	1 x 1173 lm	24 V DC
-B18-4		1 x 6 W	4000 K	1 x 580 lm	110-277V
-B18-5		1 x 9 W	4000 K	1 x 1218 lm	500 mA
-B18-6		1 x 9 W	4000 K	1 x 1218 lm	24 V DC
-B41-1	41°	1 x 6 W	3000 K	1 x 540 lm	110-277V
-B41-2		1 x 9 W	3000 K	1 x 1173 lm	500 mA
-B41-3		1 x 9 W	3000 K	1 x 1173 lm	24 V DC
-B41-4		1 x 6 W	4000 K	1 x 580 lm	110-277V
-B41-5		1 x 9 W	4000 K	1 x 1218 lm	500 mA
-B41-6		1 x 9 W	4000 K	1 x 1218 lm	24 V DC

3

DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-CR-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

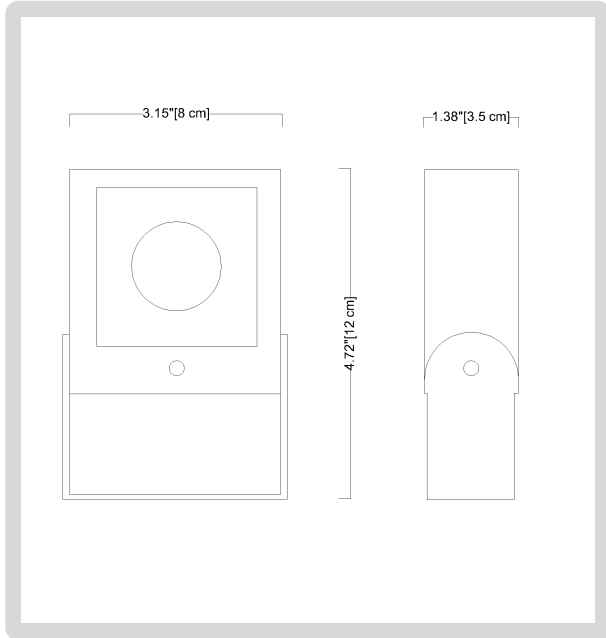

HOW TO ORDER:

CODE:

Example:
CODE:
BB-CR-SP-GH-B18-1-DIM-62-AC204

BB-CR-SP-GH-
B18-1-DIM-62-
AC204

4

FINISH OPTIONS:

- 01 White matt
- 02 Black matt
- 05 Anthracite grey matt
- 19 Light grey matt
- 26 Bronze
- 45 Corten matt
- 62 Antique grey matt
- 65 Blue matt
- 80 Sand matt
- 83 Green matt

5

ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC203

Stake 170mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 05/02/2026



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-CR-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:


CODE:

Example:
CODE:
BB-CR-SP-GH-B18-1-DIM-62-AC204

BB-CR-SP-GH-
B18-1-DIM-62-
AC204


PHOTOMETRY:

18° / 3000K




H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	1.6	49	79
4	1.3	77	124
3	1.0	137	220
2	0.6	309	495
1	0.3	1235	1980

18° / 4000K

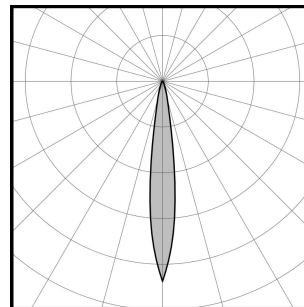


H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	3.7	17	28
4	3.0	26	45
3	2.2	47	79
2	1.5	106	178
1	0.7	423	712

41° / 3000K

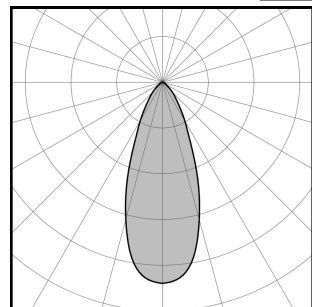

H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	1.6	111	179
4	1.3	174	279
3	1.0	310	496
2	0.6	697	1116
1	0.3	2786	4466

41° / 4000K

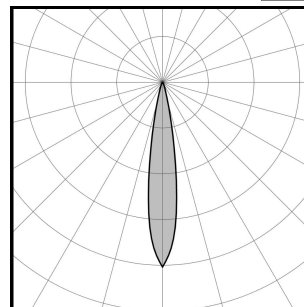

H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	3.7	38	64
4	3.0	60	100
3	2.2	106	178
2	1.5	239	402
1	0.7	955	1606

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 05/02/2026