





**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-6521.00BOBN300EN-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

BUNNY BOUNCE is a versatile recessed lighting series for façades, trees, shrubs, columns, and architectural accents. Available in various sizes, optics, and wattages, it provides precise and durable illumination for landscape and architectural use. The high-resistance aluminum body with nano-bonderite treatment and textured powder coating ensures long-term protection against UV and weather conditions. Silicone gaskets and an ultra-clear tempered glass diffuser guarantee optimal sealing and maximum light output, complemented by stainless-steel trim and hardware. A water-lock system prevents cable condensation, and a polypropylene rough-in housing allows safe ground installation. Suitable for low-speed drive-over areas (max 10 km/h); not for pools or fountains.

FIXTURE TYPE:

Inground

VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation

IP RATING:

IP 68



DIFFUSER:

Tempered glass (8mm for 90 models and 15mm for 135/245 models)

WARRANTY:

LED lighting products are warranted for 5 years.

DRIVER POSITION:

Remote

MAIN FEATURES:

- High visual comfort
- Available in a wide choice of optics
- Functional and minimalistic design
- Shock-resistant construction
- Operating Temperature: -4°F to +122°F.

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-6521.00BOBN300EN-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-6521.00SLBN300EN-GH-84-RT-
B12-1-DAL-SS

BB-6521.00SLBN3
00EN-GH-84-RT-
B12-1-DAL-SS

1 MODELS:

DIMENSIONS:


- 84-RT** (small) A) Width - W: 3.30"[8.4 cm]
B) Height - H: 5.51"[14 cm]
- 175-RT** (medium) A) Width - W: 6.88"[17.5 cm]
B) Height - H: 7.67"[19.5 cm]
- 275-RT** (large) A) Width - W: 6.88"[17.5 cm]
B) Height - H: 13"[33 cm]

LIGHT SOURCE: -84-RT

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	OPERATION RANGE
-B12-1	12°	1 x 10.5W	3000 K	1 x 980 lm	110-277 V
-B12-2		1 x 10.5W	4000 K	1 x 1090 lm	
-B25-1	25°	1 x 10.5W	3000 K	1 x 980 lm	110-277 V
-B25-2		1 x 10.5W	4000 K	1 x 1090 lm	
-B38x86-1	38° x 86°	1 x 6W	3000 K	1 x 816 lm	110-277 V
-B38x86-2		1 x 6W	4000 K	1 x 846 lm	

LIGHT SOURCE: -175-RT

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	OPERATION RANGE
-B112x30-1	112° x 95° x 30°	1 x 16.5W	3000 K	1 x 2410 lm	110-277 V
-B112x30-2		1 x 23.7W	3000 K	1 x 3306 lm	110-277 V
-B112x30-3		1 x 16.5W	4000 K	1 x 2592 lm	110-277 V
-B112x30-4		1 x 23.7W	4000 K	1 x 3555 lm	110-277 V

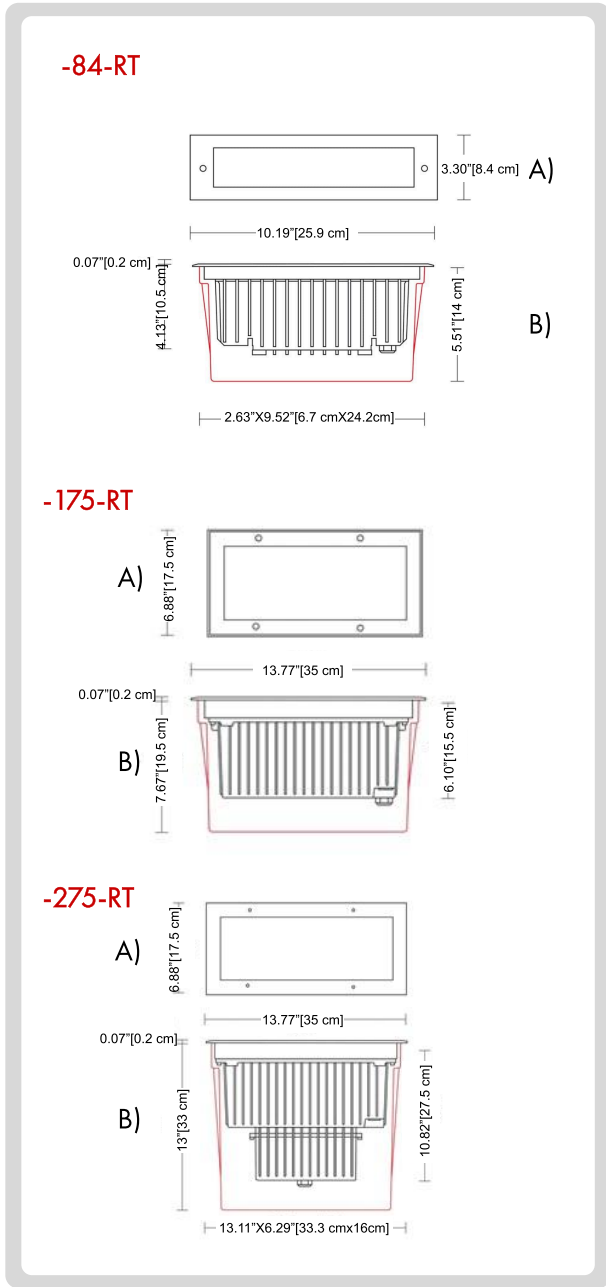

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BB-6521.00SLBN300EN-GH-84-RT-B12-1-DAL-SS

BB-6521.00SLBN300EN-GH-84-RT-B12-1-DAL-SS

1 MODELS:




LIGHT SOURCE: -275-RT

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	OPERATION RANGE
-B12-1	112°	1 x 37.1W	3000 K	1 x 4788 lm	110-277 V
-B12-2	x 95°	1 x 37.1W	4000 K	1 x 5149 lm	
	x 30°				

2 DIMMING OPTIONS:

- NON NON-Dimmable
- DIM 0-10V
- DAL Dali

3 FINISH OPTIONS:

- SS Stainless Steel 
- NB Natural Bronze 
- CUS Custom on request* 

4 ACCESSORIES:


-AC025
Rough-in housing 330X160X195



-AC204
IP 68 fast connector 4P



-AC279
IP 68 connector for wiring 4P

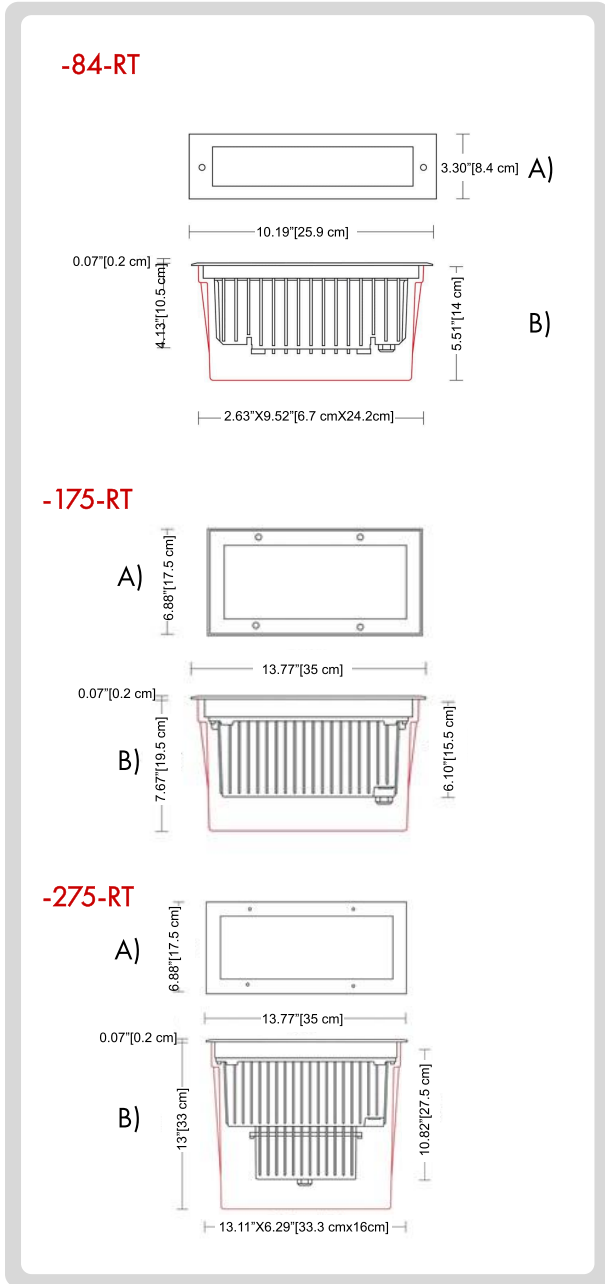

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA